


## SV-08-2NCSPL-□-□-□



### 技术参数 SPECIFICATIONS

最大工作压力

Max working Pressure: 250bar

可通过最大流量 Flow Max:

See Performance Chart

内泄漏量 Internal Leakage:

1 drops/min/210bar

过滤精度 Filtration Of Oil :

25 μ m or better

使用温度 Temperature :

-30 ~ +110°C

插孔 Cavity :

08-2, see page205

安装扭矩 Installation Torque:

25 ~ 28Nm

线圈电压范围 Coil Rating:

85% ~ 110%

Continuous from 85% to 110% of rated voltage


### 工作状态 WORKING POSITION

当电磁铁不通电时, ②到①和①到②均关闭; 当电磁铁通电时, ②到①和①到②均开启。

When de-energized, the valve blocks flow in both directions ;

When energized, allowing flow from ② to ① and ① to ② .

### PERFORMANCE

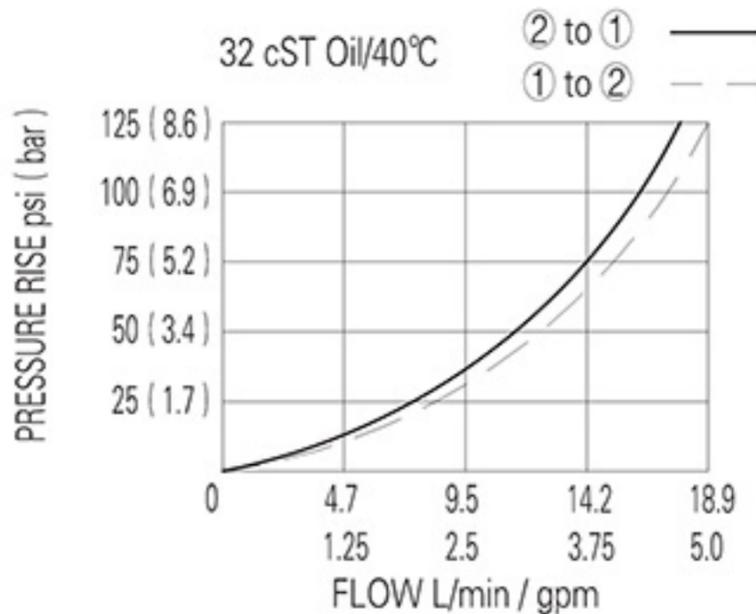

### TO ORDER

## SV-08-2NCSPL-□-□-□

插孔 Cavity

阀芯机能 Function

M = 附手动卸荷 Manual Override  
(省略为常规)

线圈连接 Coil Connection

D = Double Lead 双线

H = Hirschmann 三插

电压 Voltage

12 = 12V DC

24 = 24V DC

110 = 110V AC

220 = 220V AC