


Вилка штока Мод. G


Материал: нержавеющая сталь AISI 303.
ISO 8140.



РАЗМЕРЫ										
Мод.	Ø	ØСК	LE	CM	CL	ER	CE	KK	B	ØB1
G-90-25-32	32	10	20	10	20	12	40	M10x1,25	26	18
G-90-40	40	12	24	12	24	14	48	M12x1,25	31	20
G-90-50-63	50-63	16	32	16	32	19	64	M16x1,5	39	26
G-90-80-100	80-100	20	40	20	40	25	80	M20x1,5	50	34
G-90-125	125	30	54	30	55	38	110	M27x2	67	48

Ось Мод. S


Материал: нержавеющая сталь AISI 303.
В комплекте:
1x Ось
2x Стопорное кольцо



РАЗМЕРЫ						
Мод.	Ø	Ød	L	L1	L2	L3
S-90-32	32	10	53	46	1,1	3
S-90-40	40	12	60	53	1,1	3
S-90-50	50	12	68	61	1,1	3
S-90-63	63	16	78	71	1,1	3
S-90-80	80	16	98	91	1,1	3
S-90-100	100	20	118	111	1,3	5
S-90-125	125	25	139	132	1,3	4,2

Центральная подвеска Мод. F

Материал: нержавеющая сталь AISI 304.
В комплект входит:
1x Подвеска
8x Фиксирующий винт (не входит в комплект F-90-160 и F-90-200)

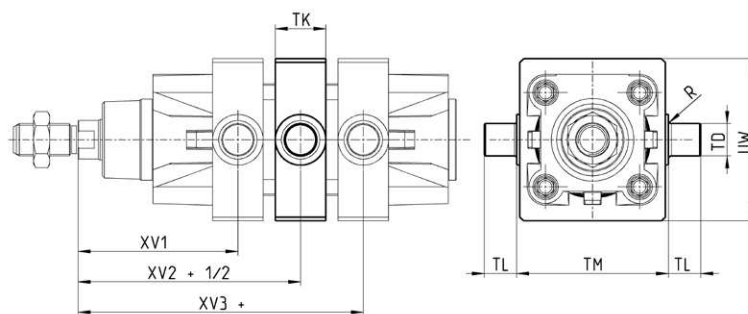

+ = добавить ход

РАЗМЕРЫ										
Мод.	Ø	XV1	XV2 + 1/2	XV3 +	TM	TK	ØTD	TL	UW	R
F-90-32	32	62	73	84	50	20	12	12	50	0,1
F-90-40	40	69	82,5	96	63	20	16	16	60	0,15
F-90-50	50	76,5	90	101	75	25	16	16	70	0,15
F-90-63	63	86	97,5	109	90	25	20	20	85	0,15
F-90-80	80	94,5	110	123	110	30	20	20	105	0,15
F-90-100	100	104,5	120	135,5	132	30	25	25	125	0,2
F-90-125	125	123	145	167	160	30	25	25	155	0,2
F-90-160	160	145	170	195	200	40	32	32	200	0,2
F-90-200	200	160	185	210	250	40	32	32	250	0,2