


Вилка для штока Мод. G



ISO 8140.
Материал: оцинкованная сталь.

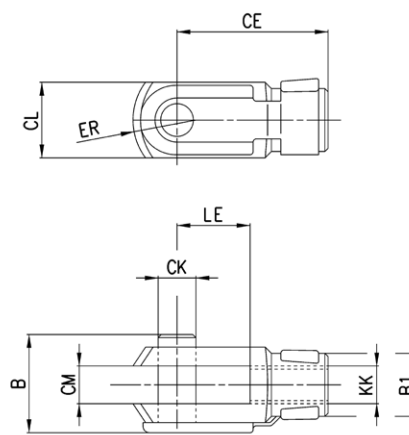


Мод.	Ø	ØСК	LE	CM	CL	ER	CE	KK	B	ØB1
G-50-63	50-63	16	32	16	32	19	64	M16x1.5	40	26
G-80-100	80-100	20	40	20	40	25	80	M20x1.5	48	34
G-41-125	125	30	55	30	55	38	110	M27x2	74	48
G-160-200	160-200	35	72	35	70	44	144	M36x2	92	60
G-250	250	40	84	40	85	64	168	M42x2	96	70
G-320	320	50	96	50	90	73	192	M48x2	116	80

Сферический наконечник Мод. GA



ISO 8139.
Материал: оцинкованная сталь.




Мод.	Ø	ØCN	U	EN	ER	AX	CE	KK	ØT	Z°	SW
GA-50-63	50-63	16	15	21	21	28	64	M16x1.5	22	7.5	22
GA-80-100	80-100	20	18	25	25	33	77	M20x1.5	27.5	7	30
GA-41-125	125	30	25	37	35	51	110	M27x2	40	7.5	41
GA-160-200	160-200	35	28	43	40	56	125	M36x2	46	6	50
GA-250	250	40	33	49	45	60	142	M42x2	55	12	55
GA-320	320	50	45	60	58.5	65	160	M48x2	65	12	65

Ось Мод. S



Материал: нержавеющая сталь.
В комплект входит:
1x Ось
2x Пружинное кольцо



Мод.	Ø	Ød	L	L1	L2	L3
S-50	50	12	66	60	1,1	3
S-63	63	16	76	70	1,1	3
S-80	80	16	97	91	1,1	3
S-100	100	20	121	111	1,3	5
S-125	125	25	140.5	135	1,3	4.25
S-160-200	160-200	30	179	170	1,6	4.25
S-250	250	40	210	202	1.85	4
S-320	320	45	236	222	1.85	7
S-400	400	80	218	202	2.65	8