


Free position L-10,5


The supply includes:
1x fake valve
2x fixing screws

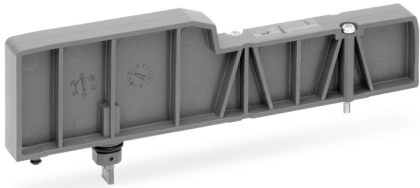

Mod.
D1EVC-L

Free position L

The supply includes:
1x fake valve
2x fixing screws

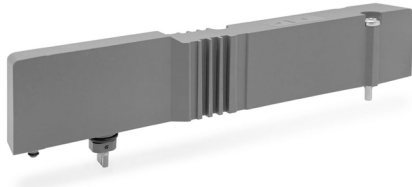

Mod.
D2EVC-L

Intermediate subbases coding example

D	AM	2	S	-	QH	-	D	T
D	SERIES							
AM	ACCESSORIES AM = modular accessories							
2	SIZE 2 = 16 mm							
S	COMPONENT S = modular subbase							
QH	INTERMEDIATE DIAPHRAGM SUBBASE Q = diaphragm on channels 1, 3, 5 R = diaphragm on channel 1 S = diaphragm on channels 3, 5				SUBBASE FOR ADDITIONAL FLOW X = supply (1) and exhausts (3, 5) XH = supply (1) and exhausts (3, 5) with integrated silencer			
	DIAPHRAGM WITH EXTERNAL SERVO-PILOT SUPPLY QT = diaphragm on channels 1, 3, 5; 12/14 external RT = diaphragm on channels 1; 12/14 external ST = diaphragm on channels 3, 5; 12/14 external				INTERFACE SUBBASE FOR ADDITIONAL FLOW WITH EXTERNAL SERVO-PILOT SUPPLY XT = additional supply (1) and exhausts (3, 5)			
	DIAPHRAGM WITH INTEGRATED SILENCER QH = diaphragm on channels 1, 3, 5 RH = diaphragm on channel 1 SH = diaphragm on channels 3, 5				FOR POWER SUPPLY K = separation of power supply - additional supply (1) and exhausts (3, 5) Z = separation of power supply - diaphragm on channel 1			
D	VERSION T = Without cartridge C = cartridge tube Ø8 D = cartridge tube Ø10 E = cartridge tube Ø12 F = cartridge tube Ø14				C = cartridge tube Ø5/16" P = cartridge tube Ø3/8" R = cartridge tube Ø1/2"			
T	TIE RODS = without tie rods T = with tie rods							

The supply of intermediate subbases includes: circuit board and connector, side seal.
The presence of single position tie rods (DA2K-MF) and the cartridges depend on the code.