


Cable with M12, 5 pin, connector, female, straight, shielded


For power supply and IO-Link command signal

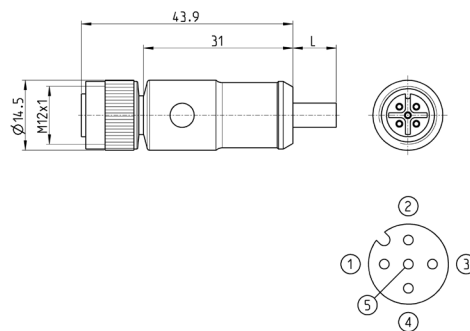

Mod.	Cable length (m)	Shielding	N° wires
CS-LF05HB-C200	2	Unshielded	5
CS-LF05HB-C500	5	Unshielded	5
CS-LF05HB-D200	2	Shielded	5
CS-LF05HB-D500	5	Shielded	5

Cable with M12 5 pin connector, 90°, female

For power supply and IO-Link command signal.

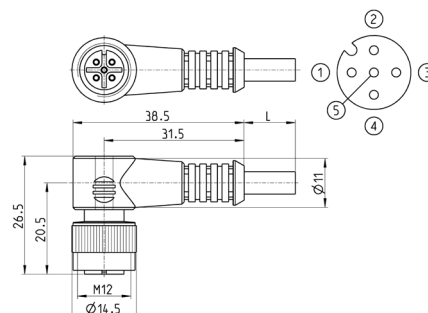


Mod.	Cable length (m)	Shielding	N° wires
CS-LR05HB-C200	2	Unshielded	5
CS-LR05HB-C500	5	Unshielded	5
CS-LR05HB-D200	2	Shielded	5
CS-LR05HB-D500	5	Shielded	5
CS-LR03HB-C200	2	Unshielded	3
CS-LR03HB-C500	5	Unshielded	3

Mounting brackets for DIN-rail PME



DIN EN 50022 (7,5mm x 35mm - width 1)
Suitable for all manifolds.

Supplied with:
2x plates
2x screws M4x6 UNI 5931
2x nuts



Mod.
PCF-EN531