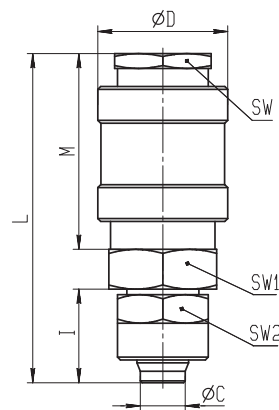


Условный проход: 7 мм

ФИТИНГИ


МОД. R5084

Мод.	Трубка	Ø	I	M	L	ØD	SW	SW1	SW2
R5084 8/6	8/6	4	15	33,9	56,3	23,7	17	19	14
R5084 10/8	10/8	6	16,5	34,5	58	23,7	17	19	16

ФИТИНГИ


МОД. R5086

Для обеспечения надежной фиксации при монтаже рекомендуется применение хомутов

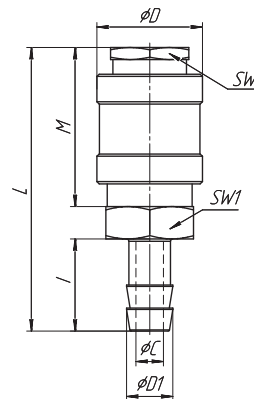

Мод.	I	M	L	ØD	SW	SW1	ØC	ØD1
R5086 09	20	34,5	61,5	22,9	17	19	5,5	10
R5086 12	20	34,5	59,5	22,9	17	19	8,5	13

ФИТИНГИ

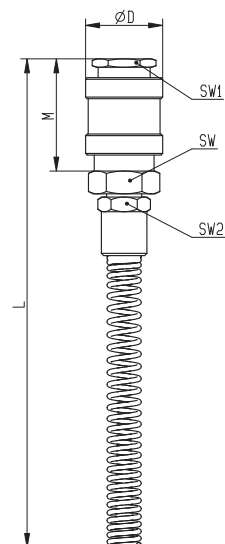МОД. R5088

Мод.	ØD	M	L	SW	SW1	SW2
R5088 8/6	23.7	34,5	135	19	17	14
R5088 10/8	23.7	34,5	139,5	19	17	16