


Условный проход: 5 мм

ФИТИНГИ


МОД. R5054

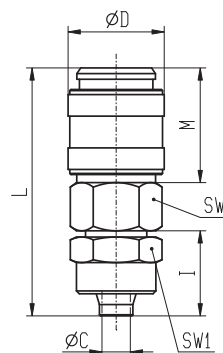

Мод.	Трубка	ØC	ØD	L	I	M	SW	SW1
R5054 6/4	6/4	3	17	43,7	15	20,2	14	12
R5054 8/6	8/6	5	17	43,7	15	20,2	14	14

ФИТИНГИ

МОД. R5055

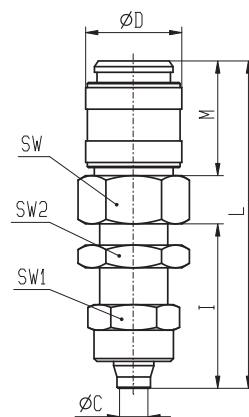


Мод.	ØC	ØD	L	I	M	SW	SW1
R5055 6/4	3	17	57,7	29	20,2	14	12
R5055 8/6	5	17	57,7	29	20,2	17	14

ФИТИНГИ

МОД. R5056



Для обеспечения надежной фиксации при монтаже рекомендуется применение хомутов

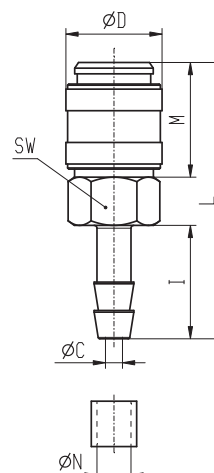

Мод.	ØC	ØD	I	L	M	ØN	SW
R5056 06	3	17	20	48,7	20,2	6	14
R5056 09	5	17	20	48,7	20,2	9	14

ØN - Размер под внутренний диаметр трубки