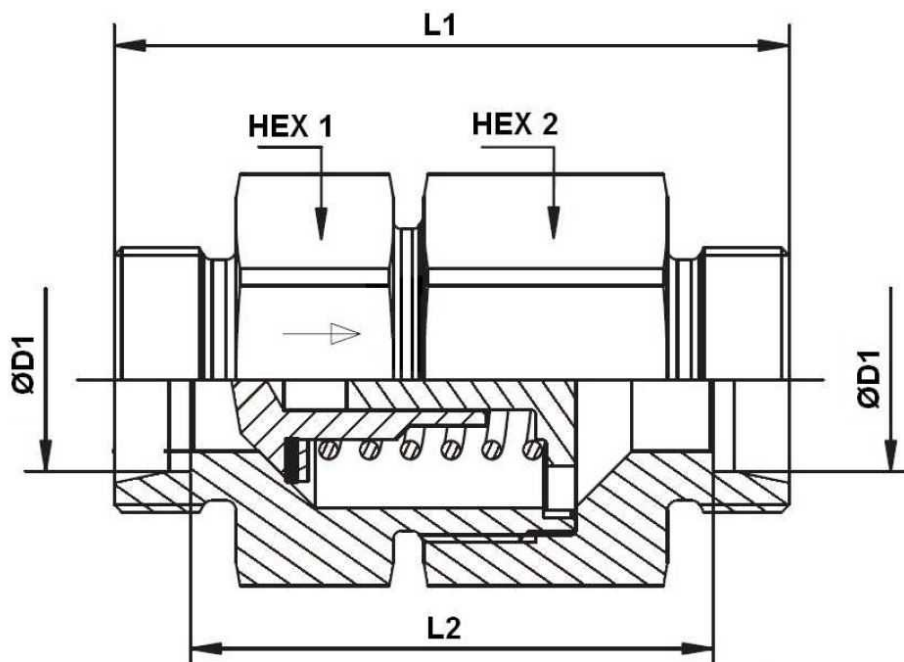


Non-return valves tube tube**1/1****Opening pressure: 1 bar**

On request: 1.5 - 2 - 2.5 - 3 bar

Permissible working temperatures without reductions in pressure for captive seals and O-Rings in NBR: -35° to +100°C

Part n°	ØD1	Serie	Working Pressure (bar)	L1	L2	HEX 1	HEX 2
STA RHDL 6	6	L	315	43	29	17	17
STA RHDL 8	8	L	315	44	30	19	19
STA RHDL 10	10	L	315	54,5	40,5	22	24
STA RHDL 12	12	L	315	57,5	43,5	27	30
STA RHDL 15	15	L	315	61,5	47,5	27	32
STA RHDL 18	18	L	315	66,5	51,5	36	36
STA RHDL 22	22	L	160	76,5	61,5	41	46
STA RHDL 28	28	L	160	84,5	69,5	50	55
STA RHDL 35	35	L	160	95,5	74,5	60	60
STA RHDL 42	42	L	160	96	74	65	70
STA RHDS 6	6	S	630	48,5	34,5	17	19
STA RHDS 8	8	S	630	48,5	34,5	17	19
STA RHDS 10	10	S	630	55,5	40,5	22	24
STA RHDS 12	12	S	630	57,5	42,5	24	27
STA RHDS 14	14	S	630	63,5	47,5	27	32
STA RHDS 16	16	S	400	67,5	50,5	32	36
STA RHDS 20	20	S	400	75,5	54,5	38	41
STA RHDS 25	25	S	400	82,5	58,5	46	50
STA RHDS 30	30	S	400	96,5	69,5	55	60
STA RHDS 38	38	S	400	107,5	75,5	65	70