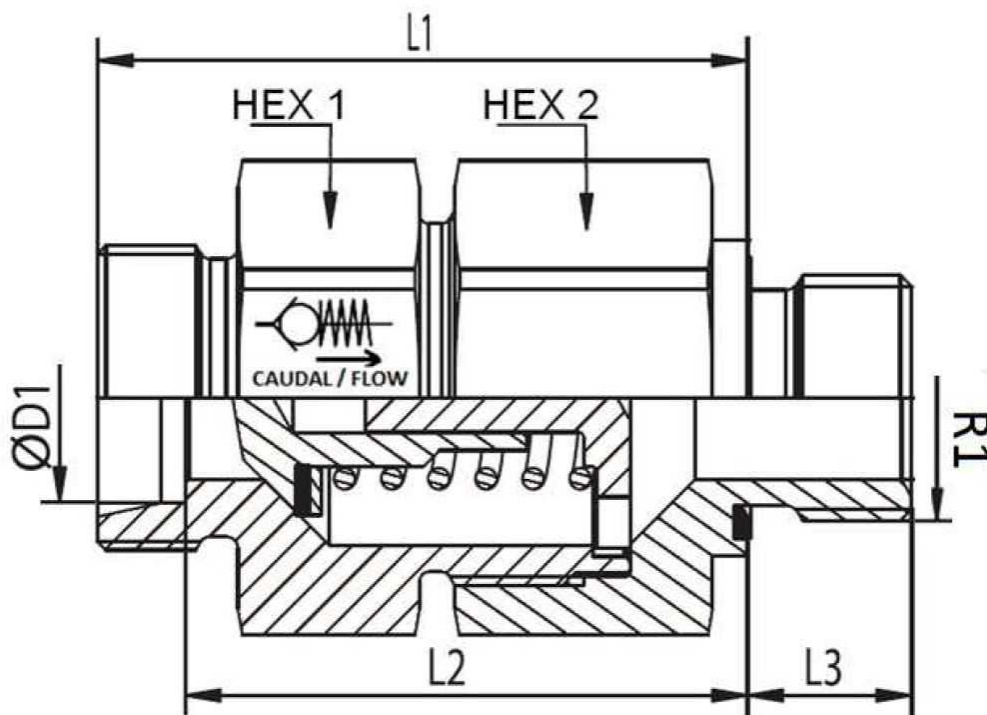


Non-return valves flow from male stud end BSP cyl.

1/1

**Opening pressure: 1 bar**

On request: 1.5 - 2 - 2.5 - 3 bar

Permissible working temperatures without reductions in pressure for captive seals and O-Rings in NBR: -35° to +100°C

Part nº	ØD1	Serie	R1	Working Pressure (bar)	L1	L2	L3	HEX 1
STA RHZL 6 R 1/8	6	L	1/8	315	60	53	8	19
STA RHZL 8 R 1/4	8	L	1/4	315	60	53	12	19
STA RHZL 10 R 1/4	10	L	1/4	315	61	54	12	19
STA RHZL 12 R 3/8	12	L	3/8	315	67,5	60,5	12	32
STA RHZL 15 R 1/2	15	L	1/2	315	72	65	14	41
STA RHZL 18 R 1/2	18	L	1/2	315	72	64,5	14	41
STA RHZL 22 R 3/4	22	L	3/4	160	83	75,5	16	50
STA RHZL 28 R 1	28	L	1	160	83	75,5	18	50
STA RHZL 35 R 1 1/4	35	L	1 1/4	160	103	92,2	20	70
STA RHZL 42 R 1 1/2	42	L	1 1/2	160	103	92	22	70
STA RHZS 6 R 1/4	6	S	1/4	630	62	55	12	19
STA RHZS 8 R 1/4	8	S	1/4	630	62	55	12	19
STA RHZS 10 R 3/8	10	S	3/8	630	68,5	61	12	32
STA RHZS 12 R 3/8	12	S	3/8	630	68,5	61	12	32
STA RHZS 14 R 1/2	14	S	1/2	630	74	66	14	41
STA RHZS 16 R 1/2	16	S	1/2	400	74	65,5	14	41
STA RHZS 20 R 3/4	20	S	3/4	400	85	74,5	16	50
STA RHZS 25 R 1	25	S	1	400	87	75	18	50
STA RHZS 30 R 1 1/4	30	S	1 1/4	400	107	93,5	20	70
STA RHZS 38 R 1 1/2	38	S	1 1/2	400	109	93	22	70