
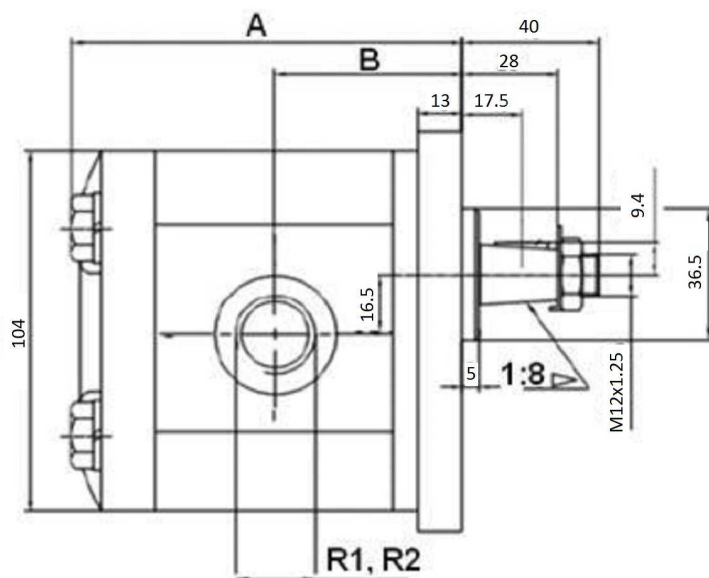


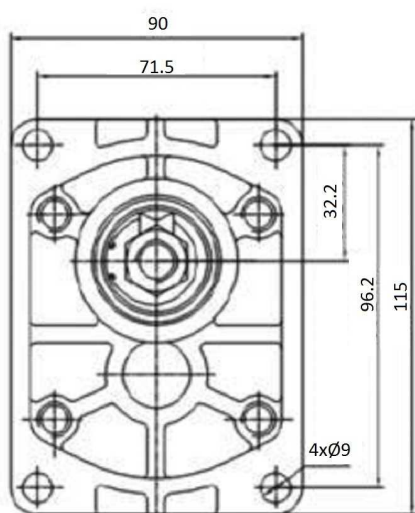

Rotation reference: BTD...I=Rotation left
 BTD...D=Rotation right
 Min 500 rpm

Flange and cover: Alluminum

Part n°	R1	R2	Max. Press. (bar)	Max. Peak press.	R.P.M.	cm ³ / rev	A	B
BTD240I01	1/2" BSP	1/2" BSP	250	300	3500	4 CC	95,5	43,3
BTD260I01	1/2" BSP	1/2" BSP	250	300	3500	6 CC	99	45
BTD280I01	1/2" BSP	1/2" BSP	250	300	3500	8 CC	102	46,5
BTD2100I01	1/2" BSP	1/2" BSP	250	300	3500	10 CC	108	49,5
BTD2120I01	1/2" BSP	1/2" BSP	250	300	3500	12 CC	108	49,5
BTD2140I01	3/4" BSP	1/2" BSP	250	300	3500	14 CC	111	51
BTD2160I01	3/4" BSP	1/2" BSP	250	300	3500	16 CC	114	52,5
BTD2200I01	3/4" BSP	1/2" BSP	250	300	3500	20 CC	121	56
BTD2230I01	3/4" BSP	1/2" BSP	200	250	3000	23 CC	125,5	58,3
BTD2250I01	3/4" BSP	1/2" BSP	200	250	3000	25 CC	128	59,5
BTD2280I01	3/4" BSP	1/2" BSP	160	200	3000	28 CC	133	62
BTD2300I01	3/4" BSP	1/2" BSP	160	200	3000	30 CC	136	63,5

(*) R1 = inlet; R2 = outlet