


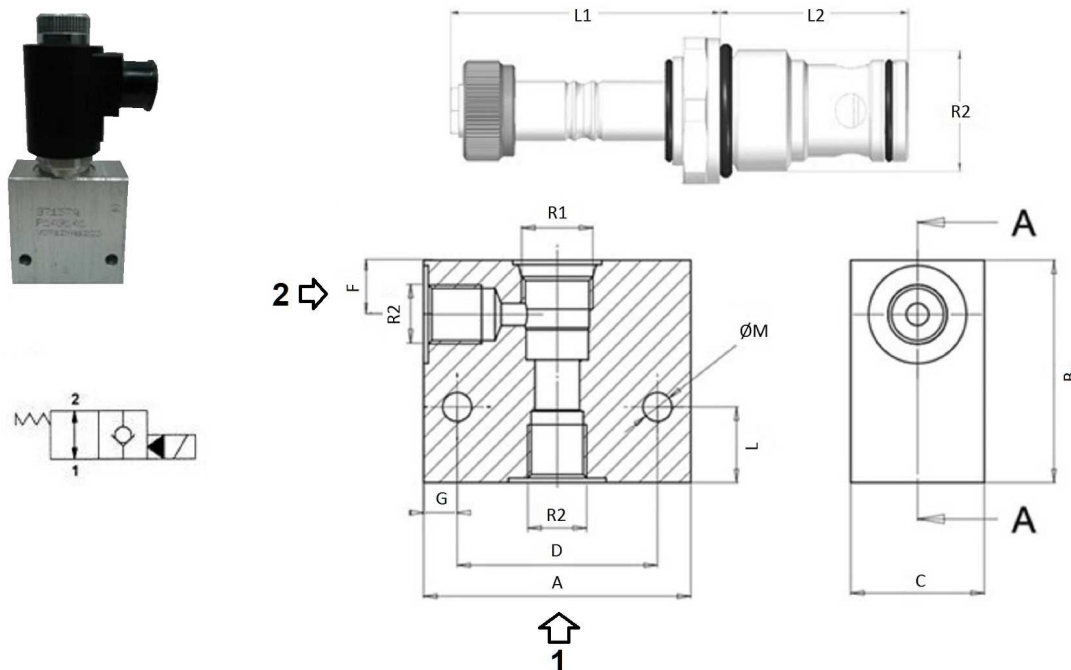

Materials: body in aluminium

Max.pressure: 250 bar

Dimensions: VCF38: Assembled total height: 109 mm
VCF12: Assembled total height: 132,4 mm
VCF34: Assembled total height: 138 mm

Electrical data: 100% ED coils, DIN43650 IP65 connector.(not included)

Part n°	R1	R2	Voltage (V)	Max. flow (l/min)	L1	L2	ØM	A	B	C	D	F	G	L
VCF38NA12CC	3/4"-16 UNF-2A	3/8" BSP	12CC	40	60	27,5	6,5	60	60	30	45	14	7,5	15
VCF38NA24CC	3/4"-16 UNF-2A	3/8" BSP	24CC	40	60	27,5	6,5	60	60	30	45	14	7,5	15
VCF38NA220CC	3/4"-16 UNF-2A	3/8" BSP	220RAC	40	60	27,5	6,5	60	60	30	45	14	7,5	15
VCF12NA12CC	7/8"-14UNF-2A	1/2" BSP	12CC	60	72,9	32	6,5	60	60	30	45	17,5	7,5	15
VCF12NA24CC	7/8"-14UNF-2A	1/2" BSP	24CC	60	72,9	32	6,5	60	60	30	45	17,5	7,5	15
VCF12NA220CC	7/8"-14UNF-2A	1/2" BSP	220RAC	60	72,9	32	6,5	60	60	30	45	17,5	7,5	15
VCF34NA12CC	1"1/16-16UNF-2A	3/4" BSP	12CC	120	65,8	46	6,5	70	70	50	54	26	8	15
VCF34NA24CC	1"1/16-16UNF-2A	3/4" BSP	24CC	120	65,8	46	6,5	70	70	50	54	26	8	15
VCF34NA220CC	1"1/16-16UNF-2A	3/4" BSP	220RAC	120	65,8	46	6,5	70	70	50	54	26	8	15

CONNECTOR NOT INCLUDED