


Normally closed 2 ways valve with double pilot check valve

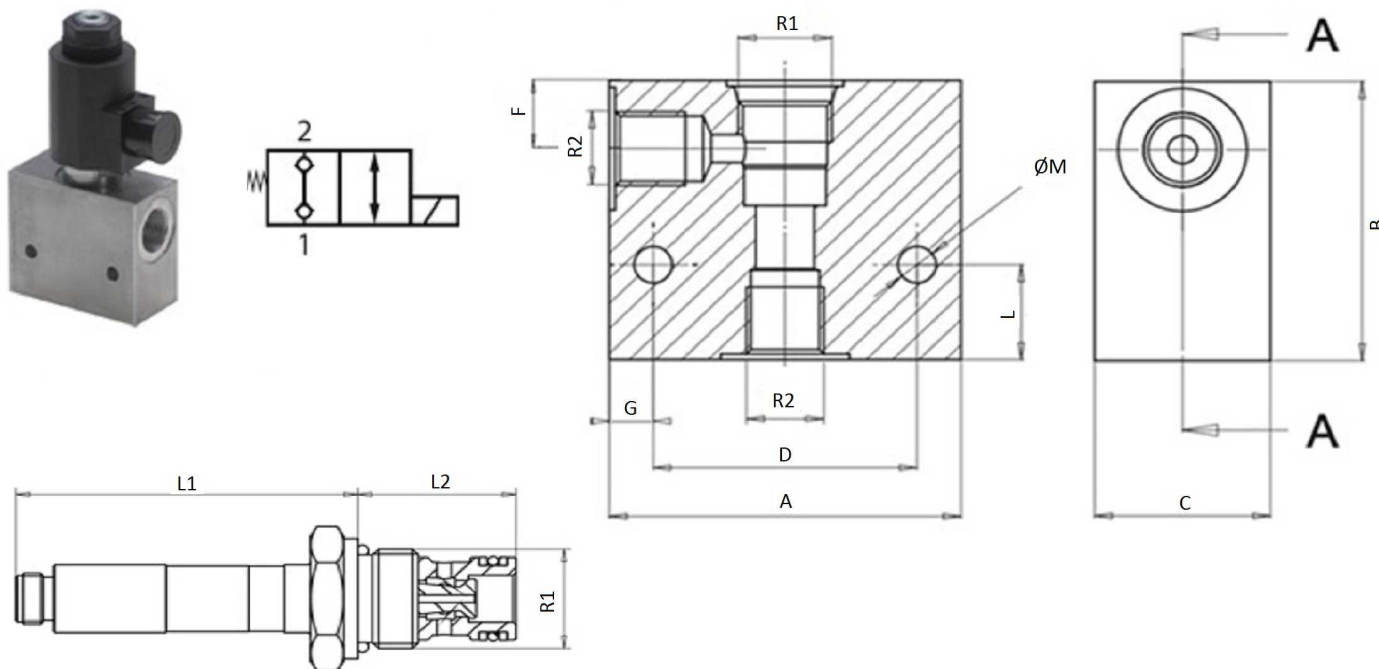

Materials: body in aluminium

Electrical data: 100% ED coils, DIN43650 IP65 connector. With 220 RAC coil you have to place a connector with a rectifier (not included)

Part n°	R1	R2	Voltage (V)	Max. flow (l/min)	Max. Press. (bar)	L1	L2	ØM	A	B	C	D	F	G	L
VCFDA3812NC	3/4"-16UNF-2A	3/8" BSP	12CC	20	250	59,4	21,6	6,5	60	50	30	45	14	7,5	15
VCFDA3824NC	3/4"-16UNF-2A	3/8" BSP	24CC	20	250	59,4	21,6	6,5	60	50	30	45	14	7,5	15
VCFDA38220NC	3/4"-16UNF-2A	3/8" BSP	220RAC	20	250	59,4	21,6	6,5	60	50	30	45	14	7,5	15
VCFDA1212NC	7/8"-14 UNF-2A	1/2" BSP	12CC	30	220	72,9	32	6,5	60	50	30	45	17,5	7,5	15
VCFDA1224NC	7/8"-14UNF-2A	1/2" BSP	24CC	30	220	72,9	32	6,5	60	50	30	45	17,5	7,5	15
VCFDA12220NC	7/8"-14UNF-2A	1/2" BSP	220RAC	30	220	72,9	32	6,5	60	50	30	45	17,5	7,5	15

THEY DO NOT HAVE MANUAL EMERGENCY OPERATION