


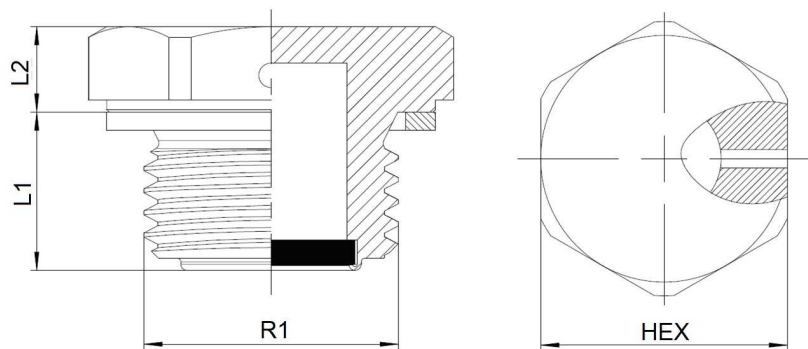

Material Body-aluminum 6061-t6 mill finished
Breather cap – steel zinc plated
Air filter – Bronze particle sintering
Filter category G4-F5
Mean separation rate (Am Approx. 70-90% based in a particle size > 40 um)

Gasket type Aluminum A11060 (Sealing DIN 7603A)

Maximum continuous working temperature -40 cº to100cº

Technical Characteristics Breather filters valve are used when the air exchange is to be allowed between the inside of the container and the ambient air.
The filter prevents air-borne particles. Dust from being carried from the outside to the inside of the container. It also

Part nº	R1	Filtration degree	L1	L2	HEX 1
NCSF1G	1/4" BSP	40 µm	8	7	17
NCSF2G	3/8" BSP	40 µm	9	7,5	22
NCSF4G	3/4" BSP	40 µm	11	8	32
NCSF5G	1" BSP	40 µm	14	9	40