


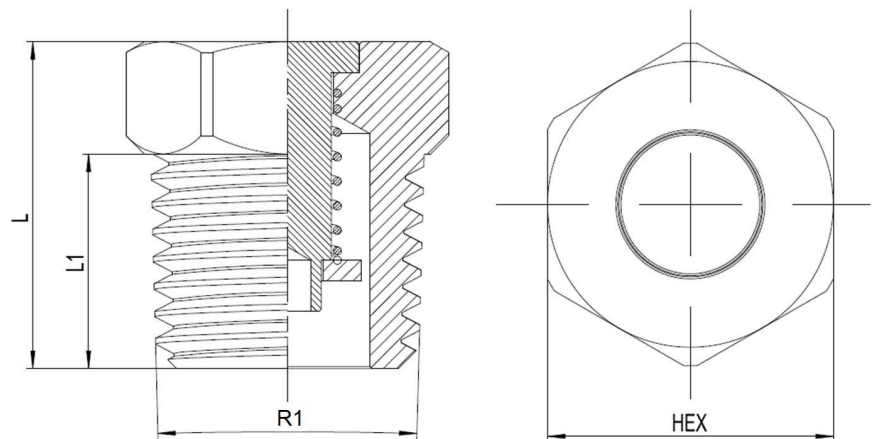

Material Body-aluminum 6061-t6 mill finished
Seal valves core – A16061-T6
Stainless spring

Opening pressure 0.05 bar- 0.35 bar

Maximum continuous working temperature -40C° - 250C°

Technical Characteristics Breather valve are used when the air exchange is to be allowed between the inside of the container and the ambient air.
In its normal state, the valves core was closed the valves so prevents dirt or dust getting inside the box.

Part n°	R1	L	L1	HEX 1
NTCA1G	1/4" BSP	14	9	19
NTCA3G	1/2" BSP	18,5	10	27
NTCA4G	3/4" BSP	23	13	32
NTCA5G	1" BSP	24	13	41