


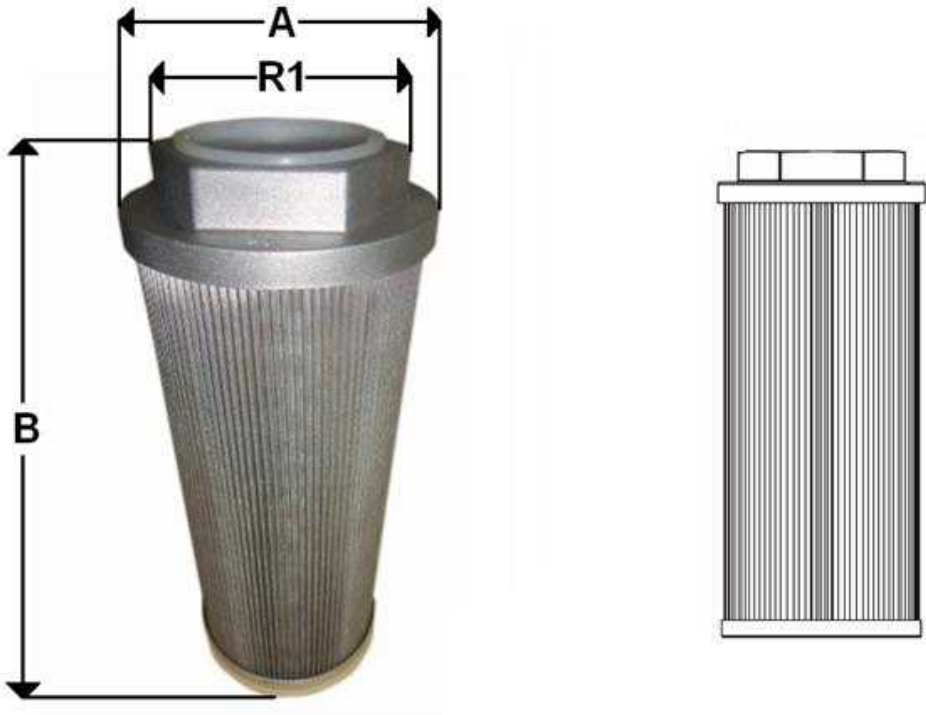

**Materials:** -steel cap/ support tube  
                  -aluminium die cast nut

**Max. temperature:** 80°C

| Part nº    | R1        | Max. flow (l/min) | A   | B   |
|------------|-----------|-------------------|-----|-----|
| FITS10T149 | 3/8" BSP  | 12                | 46  | 90  |
| FITS11T149 | 1/2" BSP  | 20                | 46  | 105 |
| FITS20T149 | 3/4" BSP  | 28                | 64  | 109 |
| FITS21T149 | 1" BSP    | 40                | 64  | 139 |
| FITS31T149 | 1"1/4 BSP | 60                | 86  | 139 |
| FITS32T149 | 1"1/2 BSP | 80                | 86  | 168 |
| FITS33T149 | 1"1/2 BSP | 120               | 86  | 200 |
| FITS34T149 | 2" BSP    | 160               | 100 | 235 |
| FITS35T149 | 2" BSP    | 200               | 100 | 260 |
| FITS42T149 | 2"1/2 BSP | 300               | 150 | 211 |
| FITS43T149 | 3" BSP    | 400               | 150 | 272 |