



MPRD SERİSİ NG06 MODÜLER TİP BASINÇ DÜŞÜRÜCÜ VALF

NG06 Modüler Tip Basınç Düşürücü Valf (Kartriç Tip), hidrolik sistemlerin farklı bölümlerinde daha düşük basınçları elde etmeye yardımcı olur. Pompa üzerindeki basıncı sabit tutarken hat üzerindeki basıncı düşürmeyi sağlar.

NG06 Modüler Tip Basınç Düşürücü Valf (Kartriç Tip) ana pompa hattına bağlı alt hattın daha düşük basınçta çalışmasını sağlar. Bu valfler pilot uyarılı çalışma sistemine sahiptirler.

Malzeme	Alüminyum
Bağlantı Şekli	NG06 Bağlantılı
Sızdırmazlık	Nitril O-ring (NBR)
Çalışma Sıcaklığı	-30 °C ile +110 °C
Isıl İşlem	İç parçalarda
Kullanım Alanı	Genel hidrolik uygulamaları







MPRD SERIES NG06 MODULAR TYPE PRESSURE REDUCER VALVE

NG06 Modular Type Pressure Reducer Valve (Cartridge Type) helps to achieve lower pressures in different parts of hydraulic systems. It allows you to reduce the pressure on the line while keeping the pressure on the pump constant.

NG06 Modular Type Pressure Reducer Valve (Cartridge Type) allows the lower line connected to the main pump line to operate at lower pressure. These valves have pilot-operated working principle.


Material	Aluminium
Connection Type	NG06 Connection
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +110 °C
Heat Treatment	Internal parts
Applications	General Hydraulic Applications



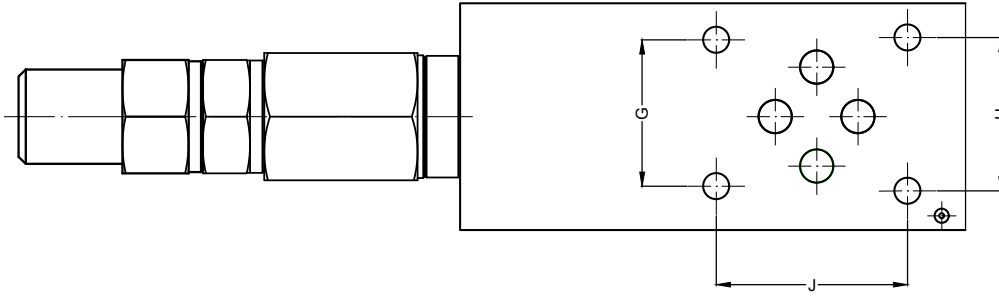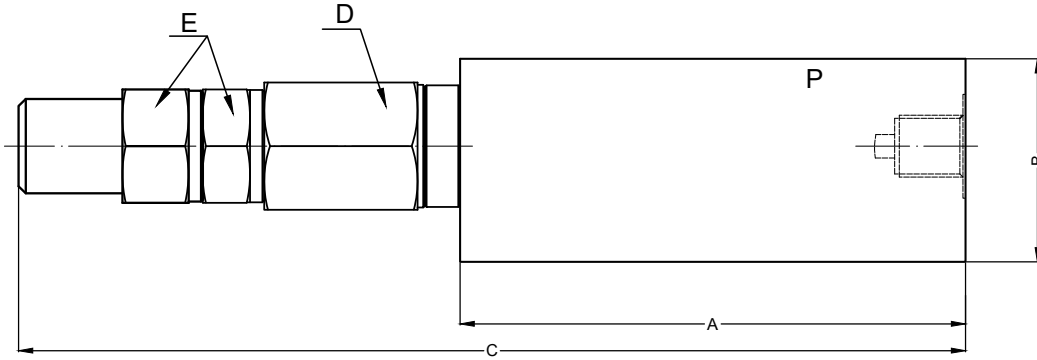

Teknik Özellikler Technical Specifications

Kod (Code)	Çalışma Basıncı (Working Pressure) Bar	Max. Yağ Akışı (Max. Flow) Lt/Min	Max. Ayarlanabilir Basıncı (Max. Set Pressure)	Ölçüler - mm (Dimensions - mm)								
				A	B	C	D	E	F	G	H	J
MPRDNG06N	350	40	210	107	43	200	AA27	AA24	48	31	32.50	40.50

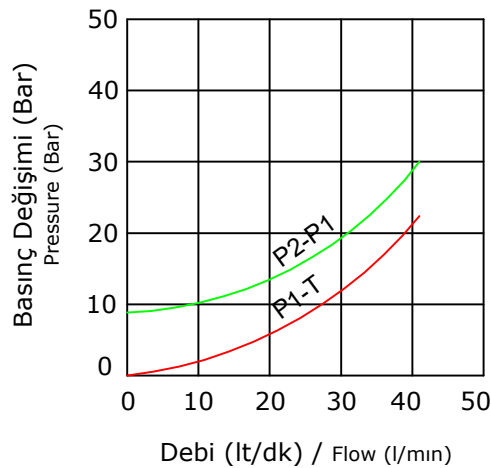



MPRD SERİSİ NG10 MODÜLER TİP BASINÇ DÜŞÜRÜCÜ VALF

NG10 Modüler Tip Basınç Düşürücü Valf (Kartriç Tip), hidrolik sistemlerin farklı bölümlerinde daha düşük basınçları elde etmeye yardımcı olur. Pompa üzerindeki basıncı sabit tutarken hat üzerindeki basıncı düşürmeyi sağlar.

NG10 Modüler Tip Basınç Düşürücü Valf (Kartriç Tip) ana pompa hattına bağlı alt hattın daha düşük basınçta çalışmasını sağlar. Bu valfler pilot uyarılı çalışma sistemine sahiptirler.

Malzeme	Alüminyum
Bağlantı Şekli	NG10 Bağlantılı
Sızdırmazlık	Nitril O-ring (NBR)
Çalışma Sıcaklığı	-30 °C ile +110 °C
Isıl İşlem	İç parçalarda
Kullanım Alanı	Genel hidrolik uygulamaları



MPRD SERIES NG10 MODULAR TYPE PRESSURE REDUCER VALVE

NG10 Modular Type Pressure Reducer Valve (Cartridge Type) helps to achieve lower pressures in different parts of hydraulic systems. It allows you to reduce the pressure on the line while keeping the pressure on the pump constant.


NG10 Modular Type Pressure Reducer Valve (Cartridge Type) allows the lower line connected to the main pump line to operate at lower pressure. These valves have pilot-operated working principle.

Material	Aluminium
Connection Type	NG10 Connection
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +110 °C
Heat Treatment	Internal parts
Applications	General Hydraulic Applications




216



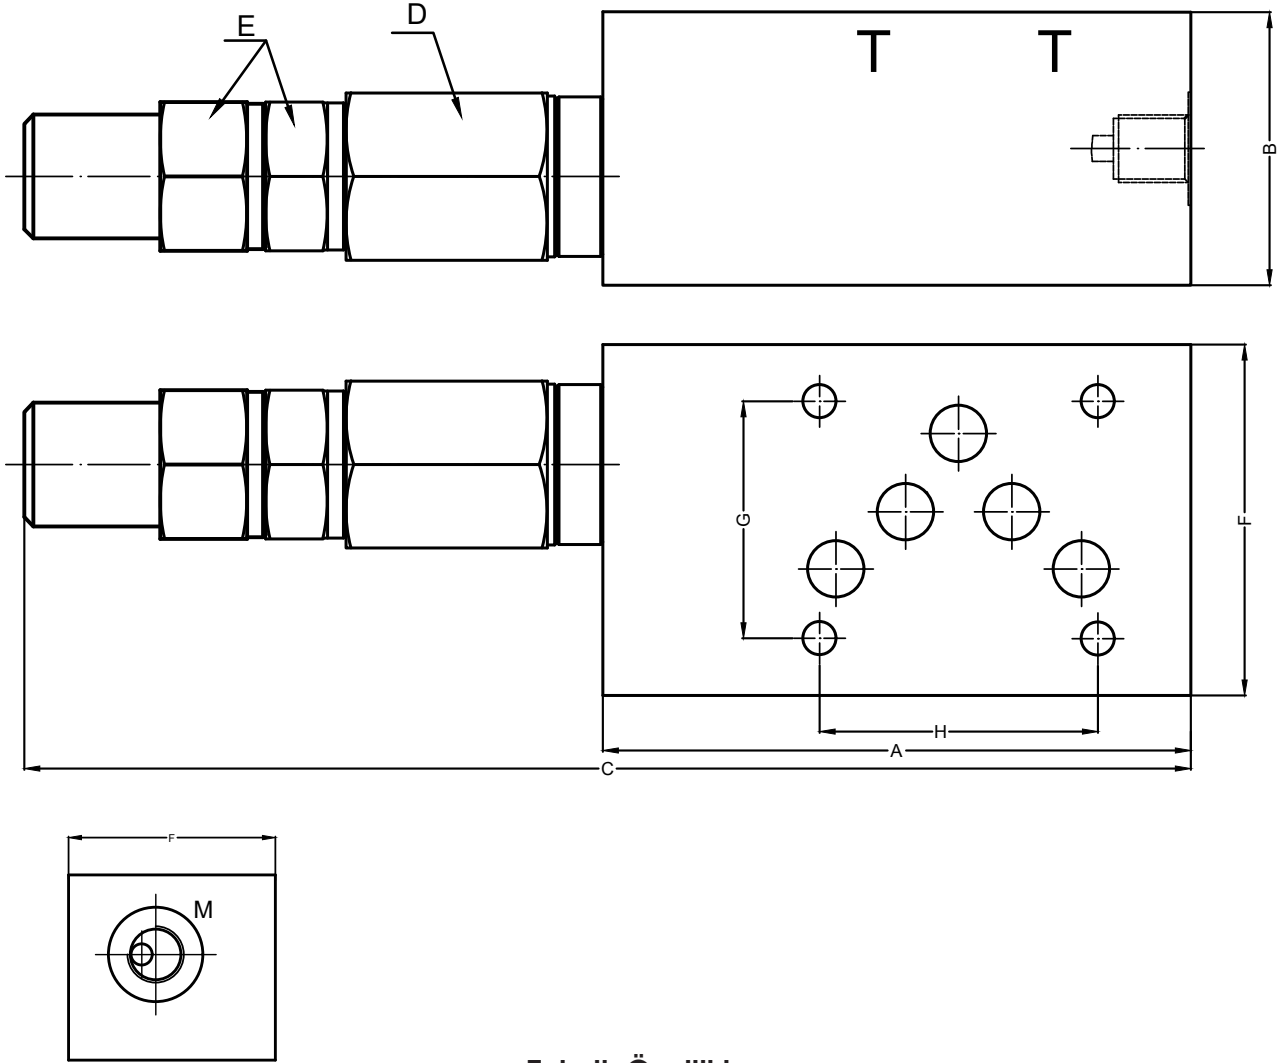

Teknik Özellikler Technical Specifications

Kod (Code)	Çalışma Basıncı (Working Pressure) Bar	Max. Yağ Akışı (Max. Flow) Lt/Min	Max. Ayarlanabilir Basınç (Max. Set Pressure)	Ölçüler - mm (Dimensions - mm)								
				A	B	C	D	E	F	G	H	J
MPRDNG10N	350	80	210	114	53	228	AA30	AA27	68	46	54	-

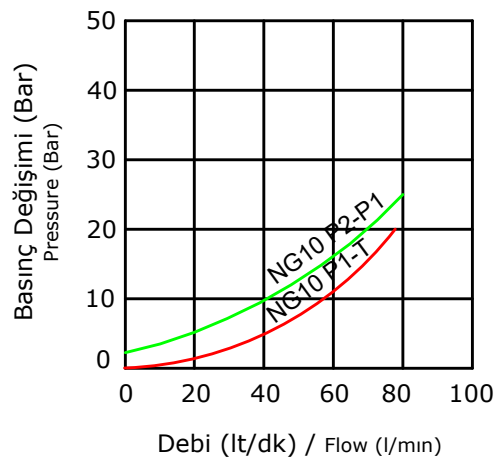



PRD SERİSİ BASINÇ DÜŞÜRÜCÜ VALFLER

Basınç Düşürücü Valfler, hidrolik sistemlerin farklı bölümlerinde daha düşük basınçları elde etmeye yardımcı olur. Pompa üzerindeki basıncı sabit tutarken hat üzerindeki basıncı düşürmeyi sağlar.

Basınç Düşürücü Valfler ana pompa hattına bağlı alt hattın daha düşük basınçta çalışmasını sağlar. Bu valfler pilot uyarılı çalışma sistemine sahiptirler.

Malzeme	Alüminyum
Vida Ölçüsü	BSP (İsteğe Bağlı: NPT, Metrik)
Sızdırmazlık	Nitril O-ring (NBR)
Çalışma Sıcaklığı	-30 °C ile +110 °C
Isıl İşlem	İç parçalarda
Kullanım Alanı	Genel hidrolik uygulamaları





PRD SERIES PRESSURE REDUCER VALVES

Pressure Reducer Valves helps to achieve lower pressures in different parts of hydraulic systems. It allows you to reduce the pressure on the line while keeping the pressure on the pump constant.

Pressure Reducer Valves allows the lower line connected to the main pump line to operate at lower pressure. These valves have pilot-operated working principle.

Material	Aluminium
Thread Size	BSP (Upon Request: NPT, Metric)
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +110 °C
Heat Treatment	Internal parts
Applications	General Hydraulic Applications



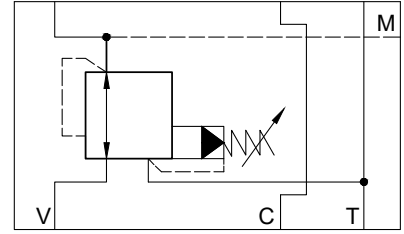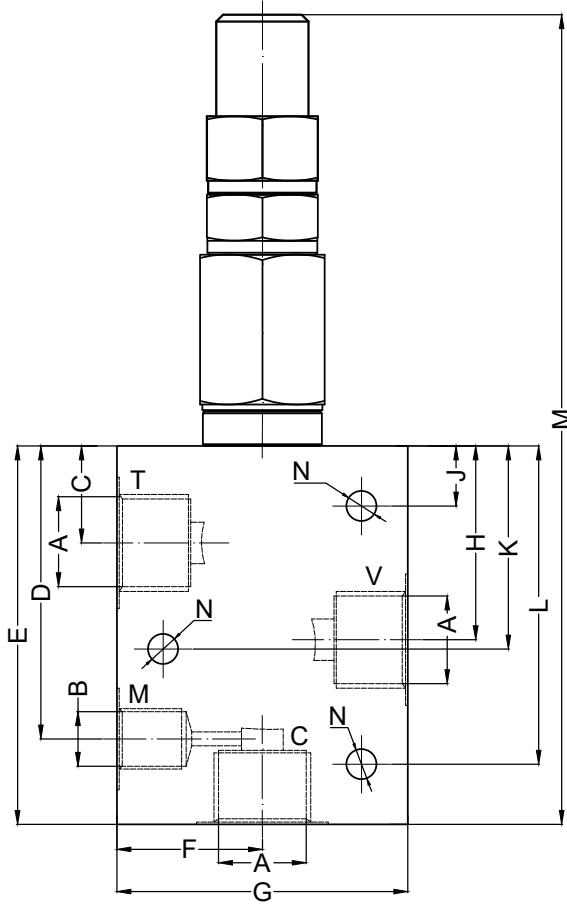

Teknik Özellikler Technical Specifications

Kod (Code)	Çalışma Basıncı (Working Pressure) Bar	Max. Yağ Akışı (Max. Flow) Lt/Min	Max. Ayarlanabilir Basıncı (Max. Set Pressure)	Ölçüler - mm (Dimensions - mm)												
				A	B	C	D	E	F	G	H	J	K	L	M	N
PRDG38N	350	40	210	3/8" BSP	1/4" BSP	21	63.50	82	31.50	63	42	13	44	69	175.50	Ø6.50
PRDG12N	350	40	210	1/2" BSP	1/4" BSP	21	63.50	82	31.50	63	42	13	44	69	175.50	Ø6.50
PRDG34N	350	80	210	3/4" BSP	1/4" BSP	38	80	105	41.50	83	51	13	51	73	205	Ø8.50

