

VM2 *SAE 8/2 - 30 l/min - 350 bar*


EMERGENCY VALVES

The bidirectional valves, with direct action VM2 normally closed 2 ways 2 positions, allow manual intervention, the opening is obtained by manually pushing the rear button, removing the hand automatically the valve closes.

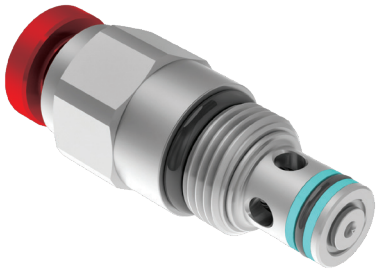


HYDRAULIC CIRCUIT




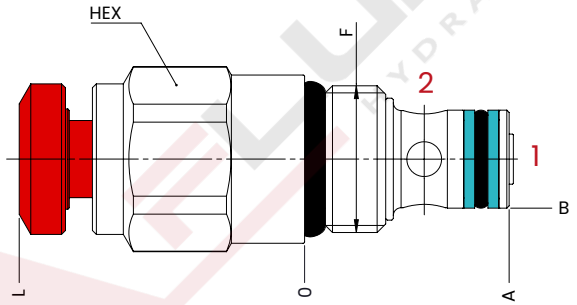

PERFORMANCES

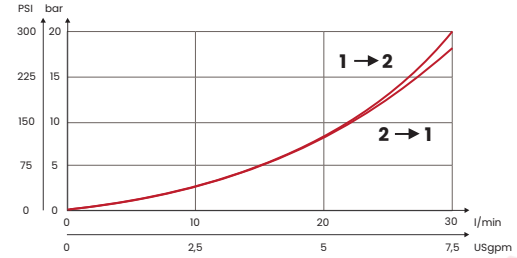

EFFORT OPERATING AT THE END OF THE KNOB

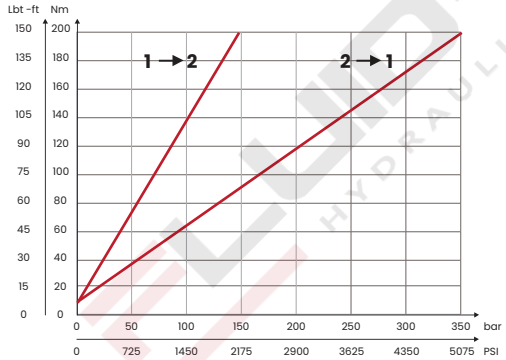

TECHNICAL CHARACTERISTICS

mm [Inches]

F	L	A	B	HEX
SAE8/2	37 [1,48]	26,5 [1,04]	12,7 [0,50]	22
M20X1,5	34 [1,34]	25 [0,98]	15 [0,59]	24

ORDERING CODE

CODE	TYPE	CAVITY	MAX FLOW **l/min** [USgpm]	MAX PRESSURE **bar** [PSI]	TIGHTENING TORQUE **Nm** [lbt ft]	WEIGHT **kg** [lb]
FA7026	VM2	SAE8/2 3/4-16UNF See cavity paragraph p. 354	30 [7,9]	350 [5075]	30 [22]	0,12 [0,26]
FA7067	VM20M	FC003 M20X1,5 See cavity paragraph p. 358				

UPDATE. Dec. 2025 (v.07)

Mineral oil: DIN 51524 ISO 6743/4 | **Oil viscosity**: 15 to 250 cSt 15-250 mm2/s | **Oil temperature**: -4°F + 176°F -20°C +80°C | **Ambient temperature**: -4°F + 122°F -20°C +50°C | **Max contamination index with filter**: 5 to 250 cSt 15-250 mm2/s | It is necessary a filter use to protect the valve (advised filtration 15 µm)

Via Guadiana n° 8/1, 42124 Reggio Emilia - ITALY | www.fluid-app.it | **sales@fluid-app.it**


Fluid-app Srl reserves the right to modify its products without notice.
Fluid-app Srl si riserva il diritto di modificare i propri prodotti senza preavviso.

MANIFOLD SAE8/2



ORDERING CODE

CODE	F	CAVITY	MAX WORKING PRESSURE **bar** PSI	WEIGHT **kg** lb
31100042	1/4 BSPP	SAE8/2 **3/4-16UNF-2B** See cavity paragraph p. 354	350 [5076]	0,48 [1,06]
31100043	3/8 BSPP			0,45 [1,99]
Steel body (on request aluminium body)				

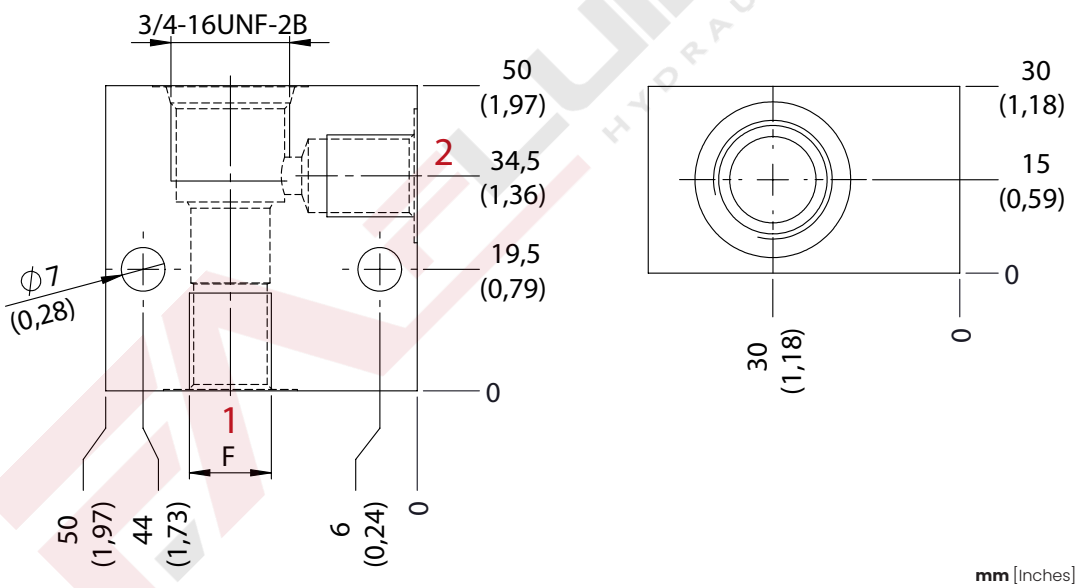

mm [Inches]

Via Guadiana n° 8/1, 42124 Reggio Emilia - ITALY | www.fluid-app.it | **sales@fluid-app.it**

Fluid-app Srl reserves the right to modify its products without notice.
Fluid-app Srl si riserva il diritto di modificare i propri prodotti senza preavviso.

UPDATE. April 2025 (v.06)