



GGW

RASCHIATORI
WIPERS

TECNOLAN

Versione standard	Standard version
Poliuretano	Polyurethane
Velocità fino a / Speed up to	
0.8 m/s	
Temperatura / Temperature	
-35°C +100°C	
Applicazioni	Applications
Cilindri idraulici semplice effetto	Single acting hydraulic cylinders





GUARNITEC

RASCHIATORI
WIPERS


GGW

282÷284

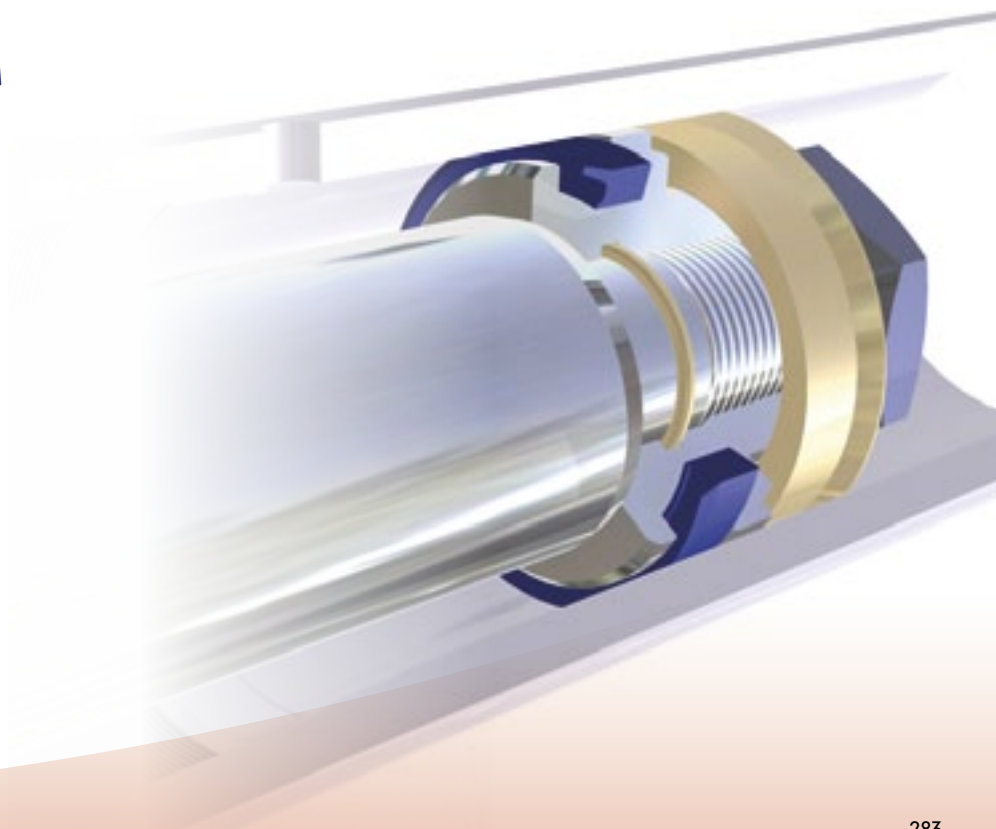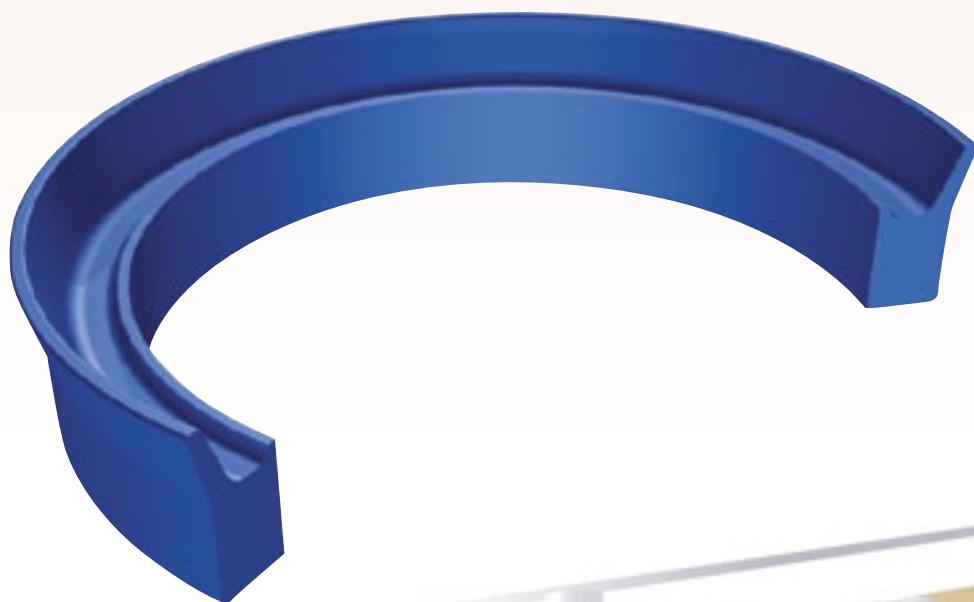



GGW

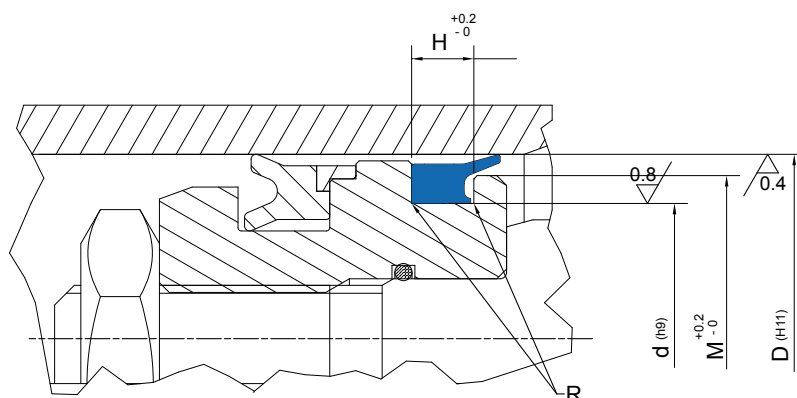

Design wipers guidelines

R	R ≤ 0.5 mm	
r	r ≤ 0.3 mm	
A	D ≤ 70mm	D ≥ 70mm
	4 mm	6 mm

[illegible]