

O-RING GKS GKM

Guarnizioni per TENUTE STATICHE
STATIC seals


TECNORING




Versione standard		Standard version	
O-RING	NBR	O-RING	NBR
GKS	TPE	GKS	TPE
GKM	TPE	GKM	TPE
Versioni Alternative		Alternative Versions	
O-RING FKM	NBR FKM	O-RING FKM	NBR FKM
O-RING PU	Poliuretano	O-RING PU	Polyurethane
Pressione fino a / Pressure up to			
Statico/Static Radial Sealing 20 MPa (OR) 40 MPa (OR+GKS) (OR+GKM) 200 MPa (OR+GKS special)		Dinamico/Dynamic Radial Sealing Oltre/Over 5 MPa (OR+GKS) (OR+GKM)	
Velocità DINAMICO fino a / DYNAMIC Speed up to			
0.5 m/s			
Velocità IN ROTAZIONE fino a / ROTATION Speed up to			
2 m/s			
Temperatura / Temperature			
-30°C +110°C NBR		-20°C +200°C FKM	-35°C+100°C PU
			-40°C +140°C TPE

O-RING • GKS • GKM

300÷314

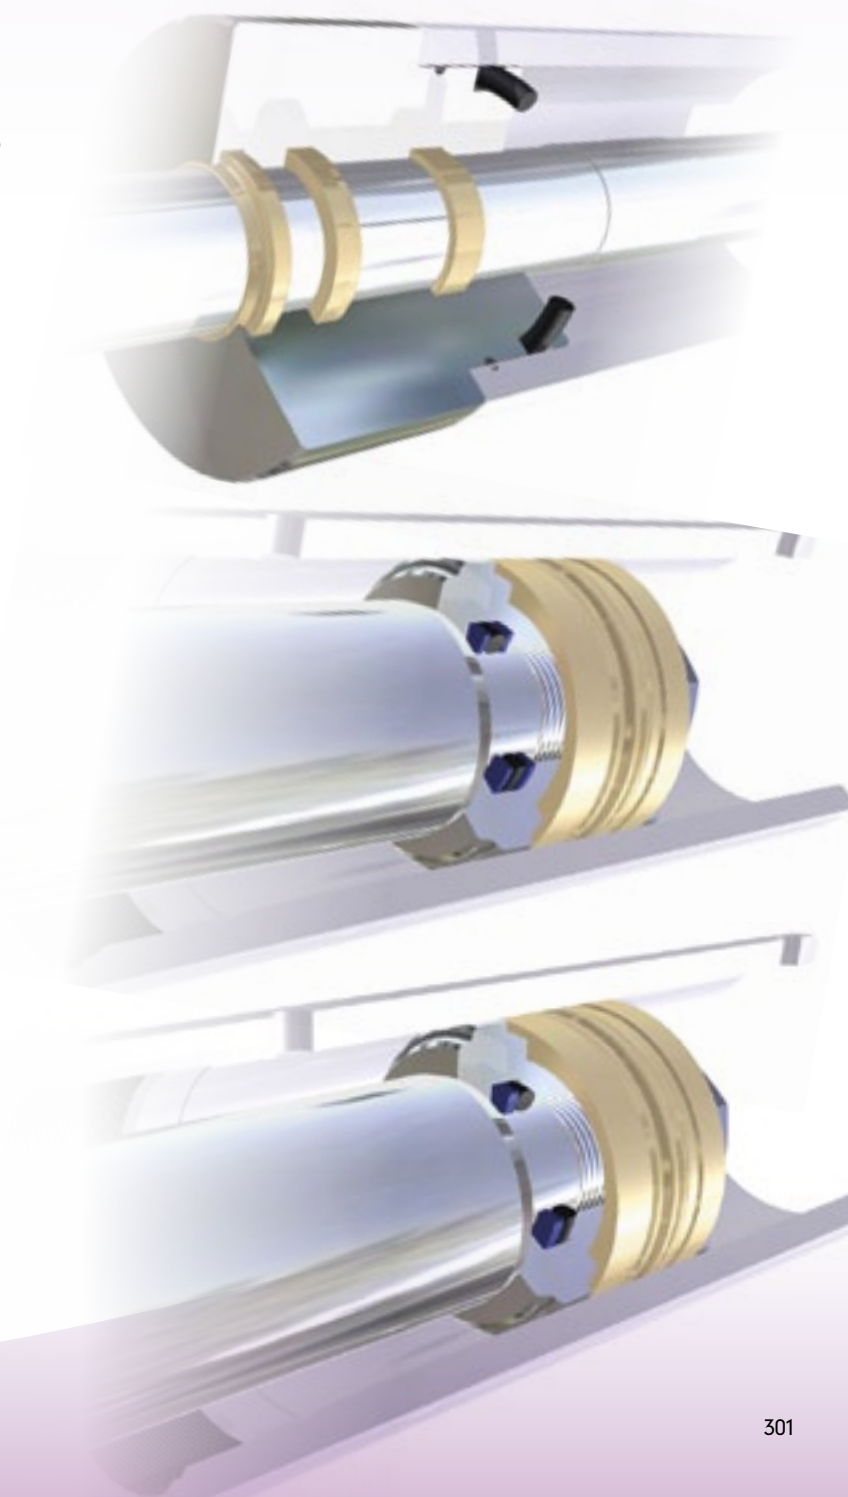

O-RING GKS

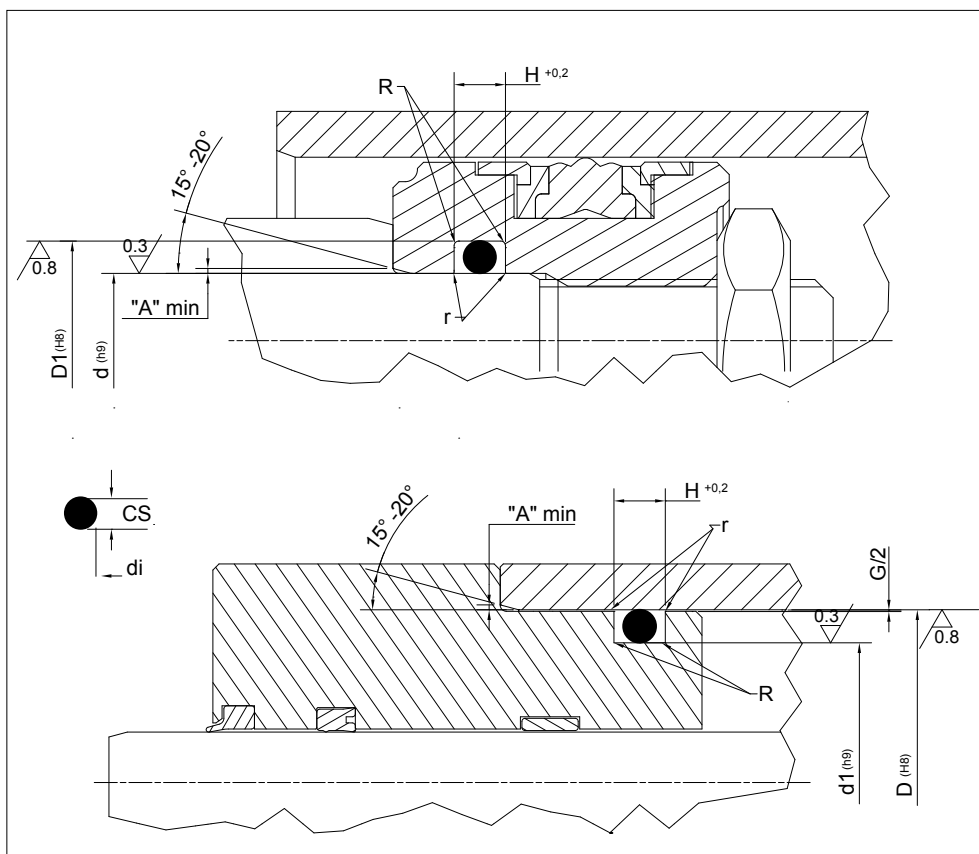

Static Seal design guidelines

R	0mm < d ≤ 20mm	20mm < d ≤ 50mm	50mm < d ≤ 100mm	d ≥ 100mm
	max 0.50 mm	max 0.80 mm	max 1 mm	max 1.5 mm
r	remove sharp edges: r ≤ 0.3mm			
A	1 mm	2 mm	3 mm	3 mm < A ≤ 5 mm

Operating pressure to determinate Maximum Gap Allowance: G/2

G	O-ring Cross Section (CS)	> 16 MPa	> 26 MPa	> 32 MPa	> 40 MPa
	1.78	0.40 mm	0.40 mm	0.30 mm	0.20 mm
	2.62	0.70 mm	0.60 mm	0.50 mm	0.30 mm
	3.53	1.00 mm	0.80 mm	0.70 mm	0.50 mm
	5.34	1.00 mm	0.80 mm	0.70 mm	0.50 mm
	6.99	1.10 mm	0.90 mm	0.70 mm	0.70 mm

TECNORING			O-Ring Dimensions		Housing Dimensions					GDS for O-Ring grooves		
PART NR	OR UK	U.S.A	di	CS	H	D	d1	d	D1	OR	OR+1GKS	OR+2GKS
10.001	2007	004	1,78	1,78								
10.002	2010	005	2,57	1,78								
10.003	101	2012	006	2,90	1,78	2,40	6,35	3,73	3,12	5,74		
10.004			801	3,17	1,78							
10.005	102	2015	007	3,69	1,78	2,40	7,14	4,52	3,91	6,53		
10.006	103	2018	008	4,47	1,78	2,40	7,93	5,31	4,70	7,32		
10.006/1			802	4,76	1,78							
10.007	104	2021	009	5,28	1,78	2,40	8,74	6,12	5,51	8,13	2,50	
10.008	105	2025	010	6,07	1,78	2,40	9,53	6,91	6,30	8,92	4,00	
10.008/1			803	6,35	1,78							
10.009	106		610	6,75	1,78	2,40	10,32	7,70	7,08	9,70	5,50	
10.010	107	2031	011	7,65	1,78	2,40	11,11	8,49	7,78	10,49		
10.010/1			804	7,94	1,78							
10.011				8,48	1,78							
10.012	108		611	8,73	1,78	2,40	12,30	9,68	9,07	11,69		

TECNORING			O-Ring Dimensions		Housing Dimensions					GDS for O-Ring grooves		
PART NR	OR UK	U.S.A	di	CS	H	D	d1	d	D1	OR	OR+1GKS	OR+2GKS
10.013	110 2037	012	9,25	1,78	2,40	12,70	10,08	9,47	12,09	2,50 4,00 5,50		
10.013/1			9,52	1,78								
10.014			9,75	1,78								
10.015		2043	10,82	1,78	2,40	14,30	11,68	11,10	13,72			
10.016	114	806	11,11	1,78	2,40	14,68	12,06	11,51	14,13			
10.017		2050	12,42	1,78	2,40	15,88	13,26	12,70	15,32			
10.018		2056	14,00	1,78	2,40	17,48	14,86	14,28	16,90			
10.019		2062	15,60	1,78	2,40	19,05	16,43	15,88	18,50			
10.020		2068	17,17	1,78	2,40	20,63	18,01	17,48	20,10			
10.021		2075	18,77	1,78	2,40	22,23	19,61	19,05	21,67			
10.022		2081	20,35	1,78	2,40	23,80	21,18	20,63	23,25			
10.023		2087	21,95	1,78	2,40	25,40	22,78	22,23	24,85			
10.024		2093	23,52	1,78	2,40	26,98	24,36	23,81	26,42			
10.025		2100	25,12	1,78	2,40	28,58	25,96	25,40	28,02			
10.026		2106	26,70	1,78	2,40	30,18	27,56	26,98	29,60			
10.027		2112	28,30	1,78	2,40	31,75	29,13	28,58	31,20			
10.028		2118	29,87	1,78	2,40	33,33	30,71	30,18	32,80			
10.029		2125	31,47	1,78	2,40	34,93	32,31	31,75	34,37			
10.030		2131	33,05	1,78	2,40	36,50	33,88	33,33	35,95			
10.031		2137	34,65	1,78	2,40	38,10	35,48	34,93	37,55			
10.031/1		517	36,27	1,78	2,40							
10.032		2150	37,82	1,78	2,40							
10.032/1		519	39,45	1,78	2,40							
10.033		2162	41,00	1,78	2,40							
10.034		2175	44,17	1,78	2,40							
10.035		2187	47,35	1,78	2,40							
10.036		2200	50,52	1,78	2,40							
10.037		2212	53,70	1,78	2,40							
10.038		2225	56,87	1,78	2,40							
10.039		2237	60,04	1,78	2,40							
10.040		2250	63,22	1,78	2,40							
10.041		2262	66,40	1,78	2,40							
10.042		2275	69,57	1,78	2,40							
10.043		2287	72,75	1,78	2,40							
10.044		2300	75,92	1,78	2,40							
10.044/1		2312	79,00	1,78	2,40							
10.045		2325	82,27	1,78	2,40							
10.045/1		2337	85,34	1,78	2,40							
10.046		2350	88,62	1,78	2,40							
10.046/1		2362	91,70	1,78	2,40							
10.047		2375	94,97	1,78	2,40							
10.047/1		2387	98,05	1,78	2,40							
10.048		2400	101,32	1,78	2,40							
10.048/1		2412	104,40	1,78	2,40							
10.049		2425	107,67	1,78	2,40							
10.049/1		2437	110,74	1,78	2,40							
10.050		2450	114,02	1,78	2,40							
10.050/1		2462	117,10	1,78	2,40							
10.051		2475	120,37	1,78	2,40							
10.051/1		2487	123,44	1,78	2,40							

TECNORING

Guarnizioni per
TENUTE STATICHE
STATIC seals

O-RING GKS



O-RING GKS



TECNORING			O-Ring Dimensions		Housing Dimensions					GDS for O-Ring grooves		
PART NR	OR UK	U.S.A	di	CS	H	D	d1	d	D1	OR	OR*1GKS	OR*2GKS
10.052	2500	049	126,72	1,78	2,40					2,50	4,00	5,50
10.052/1	2512	548	129,40	1,78	2,40							
10.053	2525	050	133,07	1,78	2,40							
10.053/1	2537	550	135,76	1,78	2,40							
10.053/2	2550	551	138,94	1,78	2,40							
10.053/3	2562	552	142,11	1,78	2,40							
10.053/4	2575	553	145,29	1,78	2,40							
10.053/5	2587	554	148,46	1,78	2,40							
10.053/6	2600	555	151,64	1,78	2,40							
10.053/7	2612	556	154,81	1,78	2,40							
10.053/8	2625	557	158,00	1,78	2,40							
10.053/9	2637	558	161,16	1,78	2,40							
10.053/10	2652	559	164,34	1,78	2,40							
10.053/11	2662	560	167,51	1,78	2,40							
10.053/12	2675	561	170,69	1,78	2,40							
10.053/13	2687	562	173,87	1,78	2,40							
10.054/1		102	1,24	2,62	3,60					3,50	5,00	6,50
10.054/2		103	2,06	2,62	3,60							
10.054/3		104	2,84	2,62	3,60							
10.054/4		105	3,63	2,62	3,60							
10.054/5		106	4,42	2,62	3,60							
10.054/6		107	5,23	2,62	3,60							
10.054/7		108	6,02	2,62	3,60							
10.054/8		109	7,59	2,62	3,60							
10.054	109		9,13	2,62	3,60							
10.055	111	3037	110	9,19	2,62	3,60						
10.056	112		613	9,90	2,62	3,60						
10.057	113	3043	111	10,77	2,62	3,60						
10.058	115		614	11,91	2,62	3,60						
10.059	116	3050	112	12,37	2,62	3,60						
10.059/1		807	12,70	2,62	3,60							
10.060	117		615	13,10	2,62	3,60						
10.061	118	3056	113	13,94	2,62	3,60						
10.062	119		616	15,08	2,62	3,60						
10.063				15,34	2,62	3,60						
10.064	120	3062	114	15,54	2,62	3,60						
10.065	121		809	15,88	2,62	3,60						
10.066	122	3068	115	17,12	2,62	3,60						
10.066/1		810	17,46	2,62	3,60							
10.067	123		617	17,86	2,62	3,60	23,02	18,83	18,20	22,39		
10.068	124	3075	116	18,72	2,62	3,60	23,81	19,62	19,00	23,19		
10.069	127	3081	117	20,30	2,62	3,60	25,80	21,61	21,03	25,22		
10.070	128		812	20,64	2,62	3,60						
10.071		3087	118	21,89	2,62	3,60						
10.072	130		813	22,22	2,62	3,60	27,38	23,19	22,62	26,81		
10.073		3093	119	23,47	2,62	3,60	28,58	24,39	23,80	27,99		
10.074	132		814	23,81	2,62	3,60	28,97	24,78	24,21	28,40		
10.075		3100	120	25,07	2,62	3,60	30,18	25,99	25,40	29,59		
10.076		3106	121	26,64	2,62	3,60	31,75	27,56	26,98	31,17		
10.077		3112	122	28,24	2,62	3,60	33,33	29,14	28,58	32,77		

TECNOLOGIA			O-Ring Dimensions		Housing Dimensions					GDS for O-Ring grooves		
PART NR	OR UK	U.S.A	di	CS	H	D	d1	d	D1	OR	OR+1GKS	OR+2GKS
10.079	3118	123	29,82	2,62	3,60	34,93	30,74	30,18	34,37	3,60	5,00	6,50
10.080	3125	124	31,42	2,62	3,60	36,50	32,31	31,75	35,94			
10.081	3131	125	32,99	2,62	3,60	38,10	33,91	33,33	37,52			
10.082	3137	126	34,59	2,62	3,60	39,70	35,51	34,93	39,12			
10.083	3143	127	36,17	2,62	3,60	41,28	37,09	36,50	40,69			
10.084	3150	128	37,77	2,62	3,60	42,88	38,69	38,10	42,29			
10.085	3156	129	39,34	2,62	3,60	44,45	40,26	39,68	43,87			
10.086	3162	130	40,94	2,62	3,60	46,03	41,84	41,28	45,47			
10.087	3168	131	42,52	2,62	3,60	47,63	43,44	42,88	47,07			
10.088	3175	132	44,12	2,62	3,60	49,20	45,01	44,45	48,64			
10.089	3181	133	45,69	2,62	3,60	50,80	46,61	46,03	50,22			
10.090	3187	134	47,29	2,62	3,60	52,38	48,19	47,63	51,82			
10.091	3193	135	48,90	2,62	3,60	53,98	49,79	49,20	53,39			
10.092	3200	136	50,47	2,62	3,60	55,58	51,39	50,80	54,99			
10.093	3206	137	52,07	2,62	3,60	57,15	52,96	52,38	56,57			
10.094	3212	138	53,64	2,62	3,60	58,73	54,54	53,98	58,17			
10.095	3218	139	55,25	2,62	3,60	60,33	56,14	55,58	59,77			
10.096	3225	140	56,82	2,62	3,60	61,90	57,71	57,15	61,34			
10.097	3231	141	58,42	2,62	3,60	63,50	59,31	58,73	62,92			
10.098	3237	142	59,99	2,62	3,60	65,10	60,91	60,33	64,52			
10.099	3243	143	61,60	2,62	3,60	66,68	62,49	61,90	66,09			
10.100	3250	144	63,17	2,62	3,60	68,28	64,09	63,50	67,69			
10.101	3256	145	64,77	2,62	3,60	69,85	65,66	65,08	69,27			
10.102	3262	146	66,34	2,62	3,60	71,43	67,24	66,68	70,87			
10.103	3268	147	67,95	2,62	3,60	73,03	68,84	68,28	72,47			
10.104	3275	148	69,52	2,62	3,60	74,60	70,41	69,85	74,04			
10.105	3281	149	71,12	2,62	3,60	76,60	72,01	71,43	75,62			
10.106	3287	150	72,69	2,62	3,60							
10.106/1		640	74,30	2,62	3,60							
10.107	3300	151	75,87	2,62	3,60							
10.107/1		641	77,50	2,62	3,60							
10.107/2		642	80,60	2,62	3,60							
10.108	3325	152	82,22	2,62	3,60							
10.108/1		643	83,80	2,62	3,60							
10.109	3350	153	88,57	2,62	3,60							
10.110	3375	154	94,92	2,62	3,60							
10.111	3400	155	101,27	2,62	3,60							
10.112	3425	156	107,62	2,62	3,60							
10.113	3450	157	113,97	2,62	3,60							
10.114	3475	158	120,32	2,62	3,60							
10.115	3500	159	126,67	2,62	3,60							
10.116	3525	160	133,02	2,62	3,60							
10.117	3550	161	139,37	2,62	3,60							
10.118	3575	162	145,72	2,62	3,60							
10.119	3600	163	152,07	2,62	3,60							
10.120	3625	164	158,42	2,62	3,60							
10.121	3650	165	164,77	2,62	3,60							
10.122	3675	166	171,12	2,62	3,60							
10.123	3700	167	177,47	2,62	3,60							
10.124	3725	168	183,82	2,62	3,60							
10.125	3750	169	190,17	2,62	3,60							

TECNOLOGIA

Guarnizioni per
TENUTE STATICHE
STATIC seals

O-RING GKS



O-RING GKS



TECNORING			O-Ring Dimensions		Housing Dimensions					GDS for O-Ring grooves		
PART NR	OR UK	U.S.A	di	CS	H	D	d1	d	D1	OR	OR+1GKS	OR+2GKS
10.126	3775	170	196,52	2,62	3,60					3,50	5,00	6,50
10.127	3800	171	202,87	2,62	3,60							
10.128	3825	172	209,22	2,62	3,60							
10.129	3850	173	215,57	2,62	3,60							
10.130	3875	174	221,92	2,62	3,60							
10.131	3900	175	228,27	2,62	3,60							
10.132	3925	176	234,62	2,62	3,60							
10.133	3950	177	240,97	2,62	3,60							
10.134	3975	178	247,32	2,62	3,60							
10.135/1		201	4,34	3,53	4,80					4,50	6,00	7,50
10.135/2		202	5,94	3,53	4,80							
10.135/3		203	7,52	3,53	4,80							
10.135/4		204	9,12	3,53	4,80							
10.135/5		205	10,69	3,53	4,80							
10.135/6		206	12,29	3,53	4,80							
10.135/7		207	13,87	3,53	4,80							
10.135/8		208	15,47	3,53	4,80							
10.135/9		209	17,04	3,53	4,80							
10.135	125	4075	210	18,64	3,53	4,80	25,43	19,71	19,00			
10.136	126	4081	211	20,22	3,53	4,80	27,00	21,28	20,55			
10.137	129	4087	212	21,82	3,53	4,80	28,60	22,88	22,15			
10.138	131	4093	213	23,39	3,53	4,80	30,18	24,46	23,72			
10.139	133	4100	214	24,99	3,53	4,80	31,78	26,06	25,32			
10.140	134	618	215	25,80	3,53	4,80	32,58	26,86	26,13			
10.141	135	4106	216	26,57	3,53	4,80	33,35	27,63	26,90			
10.142	136	4112	217	28,17	3,53	4,80	34,95	29,23	28,50			
10.143	137	4118	218	29,74	3,53	4,80	36,53	30,81	30,07			
10.144	138	4125	219	31,34	3,53	4,80	38,13	32,41	31,67			
10.145	139	4131	220	32,92	3,53	4,80	39,70	33,98	33,25			
10.146	140	4137	221	34,52	3,53	4,80	41,30	35,58	34,85			
10.147	141	4143	222	36,09	3,53	4,80	42,88	37,16	36,42			
10.148	142	4150	223	37,69	3,53	4,80	44,48	38,76	38,02			
10.149	144	824	224	39,70	3,53	4,80	46,49	40,77	40,02			
10.150	4162	225	40,87	3,53	4,80	47,65	41,94	41,20	46,91			
10.151	146	825	226	41,28	3,53	4,80	48,05	42,33	41,61			
10.152	147	826	227	42,86	3,53	4,80	49,64	43,92	43,19			
10.153	4175	228	44,04	3,53	4,80	50,83	45,11	44,37	50,09			
10.154	149	827	229	44,45	3,53	4,80	51,22	45,50	44,77			
10.155	150	828	230	46,04	3,53	4,80	52,80	47,08	46,35			
10.156	4187	231	47,22	3,53	4,80	54,00	48,29	47,55	53,26			
10.157	152	829	232	47,62	3,53	4,80	54,39	48,67	47,94			
10.158	153	830	233	49,21	3,53	4,80	55,98	50,26	49,53			
10.159	4200	234	50,39	3,53	4,80	57,18	51,46	50,72	56,44			
10.160	155	831	235	50,80	3,53	4,80	57,57	51,85	51,12			
10.161	156	832	236	52,40	3,53	4,80	59,17	53,45	52,70			
10.162	4212	237	53,57	3,53	4,80	60,35	54,64	53,90	59,61			
10.163	158	833	238	53,97	3,53	4,80	60,74	55,02	54,29			
10.164	834	239	55,56	3,53	4,80	62,34	56,62	55,88	61,60			
10.165	4225	240	56,74	3,53	4,80	63,92	57,81	57,07	62,79			
10.166	161	835	57,15	3,53	4,80	63,92	58,22	57,47	63,19			

TECNOLOGIA			O-Ring Dimensions		Housing Dimensions					GDS for O-Ring grooves		
PART NR	OR UK	U.S.A	di	CS	H	D	d1	d	D1	OR	OR+1GKS	OR+2GKS
10.167	162	836	58,74	3,53	4,80	65,50	59,78	59,05	64,77			
10.168	4237	229	59,92	3,53	4,80	66,70	60,99	60,25	65,96			
10.169	164	837	60,32	3,53	4,80	67,09	61,37	60,66	66,38			
10.170	165	838	61,90	3,53	4,80	68,68	62,96	62,23	67,95			
10.171	4250	230	63,09	3,53	4,80	69,88	64,16	63,42	69,14			
10.172	167	839	63,50	3,53	4,80	70,27	64,55	63,82	69,54			
10.173	168	840	65,10	3,53	4,80	71,85	66,13	65,40	71,12			
10.174	4262	231	66,27	3,53	4,80	73,05	67,34	66,60	72,31			
10.175	170	841	66,67	3,53	4,80	73,45	67,75	67,00	72,72			
10.176	171	842	68,26	3,53	4,80	75,02	69,30	68,58	74,30			
10.177	4275	232	69,44	3,53	4,80	76,23	70,51	69,77	75,49			
10.178	174	843	69,85	3,53	4,80	76,62	70,90	70,17	75,89			
10.179	174	844	71,44	3,53	4,80	78,20	72,48	71,75	77,47			
10.180	4287	233	72,62	3,53	4,80	79,40	73,69	72,95	78,66			
10.181	176	845	73,03	3,53	4,80	79,79	74,04	73,34	79,06			
10.182	177	846	74,61	3,53	4,80	81,38	75,66	74,93	80,65			
10.183	4300	234	75,79	3,53	4,80	82,58	76,86	76,10	81,81			
10.185	4312	235	78,97	3,53	4,80	85,78	80,06	79,27	84,99			
10.186	4325	236	82,14	3,53	4,80	88,95	83,23	82,45	88,16			
10.187	4337	237	85,32	3,53	4,80	92,13	86,41	85,62	91,34			
10.188	4350	238	88,49	3,53	4,80	95,09	89,37	88,80	94,51			
10.189	4362	239	91,67	3,53	4,80	98,48	92,76	91,97	97,69			
10.190	4375	240	94,84	3,53	4,80			95,15	100,86			
10.191	4387	241	98,02	3,53	4,80			98,32	104,04			
10.192	4400	242	101,19	3,53	4,80			101,50	107,21	4,50	6,00	7,50
10.193	4412	243	104,37	3,53	4,80			104,67	110,39			
10.194	4425	244	107,54	3,53	4,80			107,85	113,56			
10.195	4437	245	110,72	3,53	4,80			111,02	116,74			
10.196	4450	246	113,89	3,53	4,80			114,20	119,91			
10.197	4462	247	117,07	3,53	4,80			117,37	123,09			
10.198	4475	248	120,24	3,53	4,80			120,55	126,26			
10.199	4487	249	123,42	3,53	4,80			123,72	129,44			
10.200	4500	250	126,59	3,53	4,80			126,90	132,61			
10.201	4512	251	129,77	3,53	4,80			130,07	135,79			
10.202	4525	252	132,94	3,53	4,80			133,25	138,96			
10.203	4537	253	136,12	3,53	4,80			136,42	142,14			
10.204	4550	254	139,29	3,53	4,80			139,60	145,31			
10.205	4562	255	142,47	3,53	4,80			142,77	148,49			
10.206	4575	256	145,64	3,53	4,80			145,95	151,66			
10.207	4587	257	148,82	3,53	4,80			149,12	154,84			
10.208	4600	258	151,99	3,53	4,80			152,30	158,01			
10.209	4625	259	158,34	3,53	4,80			158,65	164,36			
10.210	4650	260	164,69	3,53	4,80			165,00	170,71			
10.211	4675	261	171,04	3,53	4,80			171,35	177,06			
10.212	4700	262	177,39	3,53	4,80			177,70	183,41			
10.213	4725	263	183,74	3,53	4,80			184,05	189,76			
10.214	4750	264	190,09	3,53	4,80			190,40	196,11			
10.215	4775	265	196,44	3,53	4,80			196,75	202,46			
10.216	4800	266	202,79	3,53	4,80			203,10	208,81			
10.217	4825	267	209,14	3,53	4,80			209,45	215,16			

TECNOLOGIA

Guarnizioni per
TENUTE STATICHE
STATIC seals

O-RING GKS



O-RING GKS



TECNORING			O-Ring Dimensions		Housing Dimensions					GDS for O-Ring grooves		
PART NR	OR UK	U.S.A	di	CS	H	D	d1	d	D1	OR	OR*1GKS	OR*2GKS
10.218	4850	268	215,49	3,53	4,80			215,80	221,51	4,50	6,00	7,50
10.219	4875	269	221,84	3,53	4,80			222,15	227,86			
10.220	4900	270	228,19	3,53	4,80			228,50	234,21			
10.221	4925	271	234,54	3,53	4,80			234,85	240,56			
10.222	4950	272	240,89	3,53	4,80			241,20	246,91			
10.223	4975	273	247,24	3,53	4,80			247,55	253,26			
10.224		274	253,59	3,53	4,80			253,90	259,61			
10.225		275	266,29	3,53	4,80							
10.226		276	278,99	3,53	4,80							
10.227		277	291,69	3,53	4,80							
10.228		278	304,39	3,53	4,80							
10.229		279	329,79	3,53	4,80							
10.230		280	355,19	3,53	4,80							
10.231		281	380,59	3,53	4,80							
10.232		282	405,26	3,53	4,80							
10.233		283	430,66	3,53	4,80							
10.234		284	456,06	3,53	4,80							
10.235/1		309	10,46	5,34	7,10					7,00	8,80	10,60
10.235/2		310	12,07	5,34	7,10							
10.235/3		311	13,64	5,34	7,10							
10.235/4		312	15,24	5,34	7,10							
10.235/5		313	16,81	5,34	7,10							
10.235/6		314	18,42	5,34	7,10							
10.235/7		315	19,99	5,34	7,10							
10.235/8		316	21,59	5,34	7,10							
10.235/9		317	23,16	5,34	7,10							
10.235/10		318	24,77	5,34	7,10							
10.235/11		319	26,34	5,34	7,10							
10.235/12		320	27,94	5,34	7,10							
10.235/13		321	29,51	5,34	7,10							
10.235/14		322	31,12	5,34	7,10							
10.235/15		323	32,69	5,34	7,10							
10.235/16		324	34,29	5,34	7,10							
10.235	143	6150	325	37,47	5,34	7,10	47,65	38,89	38,02	46,78		
10.236	145	6162	326	40,64	5,34	7,10	50,83	42,07	41,20	49,96		
10.237				42,52	5,34	7,10						
10.238	148	6175	327	45,82	5,34	7,10						
10.239	151	6187	328	46,99	5,34	7,10	57,18	48,42	47,55	56,31		
10.240	154	6200	329	50,16	5,34	7,10	60,35	51,59	50,72	59,48		
10.241	157	6212	330	53,34	5,34	7,10	63,53	54,77	53,90	62,66		
10.242	160	6225	331	56,52	5,34	7,10	66,70	57,94	57,07	65,83		
10.243	163	6237	332	59,69	5,34	7,10	69,88	61,12	60,25	69,01		
10.244	166	6250	333	62,87	5,34	7,10	73,05	64,29	63,42	72,18		
10.245	169	6262	334	66,04	5,34	7,10	76,23	67,47	66,60	75,36		
10.246	172	6275	335	69,22	5,34	7,10	79,40	70,64	69,77	78,53		
10.247	175	6287	336	72,39	5,34	7,10	82,58	73,82	72,95	81,71		
10.248	178		619	74,63	5,34	7,10	85,00	76,24	75,35	84,11		
10.249	179	6300	337	75,57	5,34	7,10	85,78	77,02	76,10	84,86		
10.250	180	6312	338	78,74	5,34	7,10	88,95	80,19	79,27	88,03		
10.251	181		620	79,77	5,34	7,10	90,93	82,17	81,29	90,05		

TECNOLOGIA			O-Ring Dimensions		Housing Dimensions					GDS for O-Ring grooves		
PART NR	OR UK	U.S.A	di	CS	H	D	d1	d	D1	OR	OR+1GKS	OR+2GKS
10.252	182 6325	339	81,92	5,34	7,10	92,13	83,37	82,45	91,21			
10.253	183 6337	340	85,09	5,34	7,10	95,30	86,54	85,62	94,38			
10.254	184 6350	341	88,27	5,34	7,10	98,48	89,72	88,80	97,56			
10.255	185	621	89,69	5,34	7,10	100,06	91,30	90,40	99,16			
10.256	186 6362	342	91,44	5,34	7,10	101,65	92,89	91,97	100,73			
10.257	187 6375	343	94,62	5,34	7,10	104,83	96,07	95,15	103,91			
10.258	188 6387	344	97,79	5,34	7,10	108,00	99,24	98,32	107,08			
10.259	189	622	100,00	5,34	7,10	110,38	101,62	100,74	109,50			
10.260	190 6400	345	100,97	5,34	7,10	111,18	102,48	101,50	110,26			
10.261	191 6412	346	104,14	5,34	7,10	114,35	105,54	104,67	113,43			
10.263	192 6425	347	107,32	5,34	7,10	117,53	108,77	107,85	116,61			
10.264	193	623	109,54	5,34	7,10	119,91	111,15	110,23	118,99			
10.265	194 6437	348	110,49	5,34	7,10	120,70	111,94	111,05	119,81			
10.266	195 6450	349	113,67	5,34	7,10	123,88	115,12	114,20	122,96			
10.267		350	116,84	5,34	7,10							
10.268	199	860	117,48	5,34	7,10	127,84	119,08	118,17	126,93			
10.269		351	120,02	5,34	7,10							
10.270	201	861	120,65	5,34	7,10	131,02	122,26	121,34	130,10			
10.271		352	123,19	5,34	7,10							
10.272	203	862	123,83	5,34	7,10	134,19	125,43	124,12	132,88			
10.273		353	126,37	5,34	7,10							
10.274	206	863	127,00	5,34	7,10	137,37	128,61	127,69	136,45			
10.275		354	129,54	5,34	7,10							
10.276	208	864	130,18	5,34	7,10	140,54	131,78	130,87	139,63			
10.277		355	132,72	5,34	7,10							
10.278	210	865	133,35	5,34	7,10	143,72	134,96	134,04	142,80			
10.279		356	135,89	5,34	7,10	146,89	138,13	137,22	145,98			
10.280	213	866	136,53	5,34	7,10							
10.281		357	139,07	5,34	7,10	150,07	141,31	140,39	149,15			
10.282	215	867	139,70	5,34	7,10							
10.283		358	142,24	5,34	7,10							
10.284	217	868	142,88	5,34	7,10	153,24	144,48	143,57	152,33			
10.285		359	145,42	5,34	7,10							
10.286	219	869	146,05	5,34	7,10	156,42	147,66	146,74	155,50			
10.287		360	148,59	5,34	7,10							
10.288	221	870	149,23	5,34	7,10	159,59	150,83	149,92	158,68			
10.289		361	151,77	5,34	7,10							
10.289/1		644	155,00	5,34	7,10							
10.290		362	158,12	5,34	7,10							
10.290/1		645	161,30	5,34	7,10							
10.291		363	164,47	5,34	7,10							
10.291/1		646	167,70	5,34	7,10							
10.292		364	170,82	5,34	7,10							
10.292/1		647	174,00	5,34	7,10							
10.293		365	177,17	5,34	7,10							
10.294		366	183,52	5,34	7,10							
10.295		367	189,87	5,34	7,10							
10.296		6775	196,22	5,34	7,10							
10.297		6795	202,57	5,34	7,10							
10.298		6820	208,92	5,34	7,10							
10.299		6850	215,27	5,34	7,10							

TECNOLOGIA

Guarnizioni per
TENUTE STATICHE
STATIC seals

O-RING GKS



O-RING GKS



TECNORING				O-Ring Dimensions		Housing Dimensions					GDS for O-Ring grooves		
PART NR	OR UK		U.S.A	di	CS	H	D	d1	d	D1	OR	OR+10KS	OR+20KS
10.300		6870	372	221,62	5,34	7,10					7,00	8,80	10,60
10.301		6895	373	227,97	5,34	7,10							
10.302		6920	374	234,32	5,34	7,10							
10.303		6945	375	240,67	5,34	7,10							
10.304		6975	376	247,02	5,34	7,10							
10.305		6995	377	253,37	5,34	7,10							
10.306		61050	378	266,07	5,34	7,10							
10.307		61100	379	278,77	5,34	7,10							
10.308		61150	380	291,47	5,34	7,10							
10.309		61200	381	304,17	5,34	7,10							
10.310		61300	382	329,57	5,34	7,10							
10.311		61400	383	354,97	5,34	7,10							
10.312		61500	384	380,37	5,34	7,10							
10.313		61600	385	405,26	5,34	7,10							
10.314		61700	386	430,66	5,34	7,10							
10.315		61800	387	456,06	5,34	7,10							
10.316		61900	388	481,41	5,34	7,10							
10.317		62000	389	506,81	5,34	7,10							
10.318		62100	390	532,21	5,34	7,10							
10.319			391	557,61	5,34	7,10							
10.320			392	582,68	5,34	7,10							
10.321			393	608,08	5,34	7,10							
10.322			394	633,48	5,34	7,10							
10.322/1			395	658,88	5,34	7,10							
10.323	196	8450	425	113,67	6,99	9,50	127,10	115,95	114,20	125,35	9,50	12,00	14,50
10.324	197		624	114,70	6,99	9,50	128,30	117,15	115,20	126,35			
10.325	198	8462	426	116,84	6,99	9,50	130,20	119,05	117,30	128,45			
10.326	200	8475	427	120,02	6,99	9,50	133,40	122,25	120,50	131,65			
10.327	202	8487	428	123,19	6,99	9,50	136,60	125,45	123,70	134,85			
10.328	204		625	124,60	6,99	9,50	138,20	127,05	125,10	136,25			
10.329	205	8500	429	126,37	6,99	9,50	139,80	128,65	126,90	138,05			
10.330	207	8512	430	129,54	6,99	9,50	142,90	131,75	130,00	141,15			
10.331	209	8525	431	132,72	6,99	9,50	146,10	134,95	133,20	144,35			
10.332	211		626	134,50	6,99	9,50	148,20	137,05	135,00	146,15			
10.333	212	8537	432	135,89	6,99	9,50	149,30	138,15	138,15	149,30			
10.334	214	8550	433	139,07	6,99	9,50	152,50	141,35	141,35	152,50			
10.335	216	8562	434	142,24	6,99	9,50	155,60	144,45	144,45	155,60			
10.336	218	8575	435	145,42	6,99	9,50	158,80	147,65	147,65	158,80			
10.337	220	8587	436	148,59	6,99	9,50	162,00	150,85	150,85	162,00			
10.338	222	8600	437	151,77	6,99	9,50	165,20	154,05	154,05	165,20			
10.339	223		872	155,60	6,99	9,50	169,00	157,85	157,85	169,00			
10.340	224	8625	438	158,12	6,99	9,50	171,50	160,35	160,35	171,50			
10.341	225		627	159,50	6,99	9,50	173,00	161,85	161,85	173,00			
10.342	226		874	161,90	6,99	9,50	175,30	164,15	164,15	175,30			
10.343	227	8650	439	164,47	6,99	9,50	177,90	166,75	166,75	177,90			
10.344	228		628	166,70	6,99	9,50	180,20	169,05	169,05	180,20			
10.345	229		876	168,30	6,99	9,50	181,80	170,65	170,65	181,80			
10.346	230	8675	440	170,82	6,99	9,50	184,20	173,05	173,05	184,20			
10.347	231		878	174,60	6,99	9,50	188,20	177,05	177,05	188,20			
10.348	232	8700	441	177,17	6,99	9,50	190,60	179,45	179,45	190,60			

TECNORING			O-Ring Dimensions		Housing Dimensions					GDS for O-Ring grooves		
PART NR	OR UK	U.S.A	di	CS	H	D	d1	d	D1	OR	OR+1GKS	OR+2GKS
10.349	233	880	181,00	6,99	9,50	194,50	183,35	183,35	194,50			
10.350	234	8725	442	183,52	6,99	9,50	196,90	185,75	185,75	196,90		
10.351	235	882	187,30	6,99	9,50	20,90	189,75	189,75	200,90			
10.352	236	8750	443	189,87	6,99	9,50	203,30	192,15	192,15	203,30		
10.353	237	884	193,70	6,99	9,50	207,20	196,05	196,05	207,20			
10.354	238	8775	444	196,22	6,99	9,50	209,60	198,45	198,45	209,60		
10.355	239	886	200,00	6,99	9,50	213,60	202,45	202,45	213,60			
10.356	240	8800	445	202,57	6,99	9,50	216,00	204,85	204,85	216,00		
10.357	241	8825	674	208,92	6,99	9,50	222,30	211,15	211,15	222,30		
10.358	242	8850	446	215,27	6,99	9,50	228,70	217,55	217,55	228,70		
10.359	243	8875	676	221,62	6,99	9,50	235,00	223,85	223,85	235,00		
10.360	244	8900	447	227,97	6,99	9,50	241,40	230,25	230,25	241,40		
10.361	245	8925	678	234,32	6,99	9,50	247,70	236,55	236,55	247,70		
10.362	246	8950	448	240,67	6,99	9,50	254,10	242,95	242,95	254,10		
10.363	247	8975	680	247,00	6,99	9,50	260,40	249,25	249,25	260,40		
10.364	248	81000	449	253,37	6,99	9,50	266,80	255,65	255,65	266,80		
10.365	249	81025	682	259,70	6,99	9,50	273,10	261,95	261,95	273,10		
10.366	250	81050	450	266,07	6,99	9,50	279,50	268,35	268,35	279,50		
10.367	251	81075	684	272,40	6,99	9,50	285,80	274,65	274,65	285,80		
10.368	252	81100	451	278,77	6,99	9,50	292,20	281,05	281,05	292,20		
10.369	253	81125	686	285,10	6,99	9,50	298,50	287,35	287,35	298,50		
10.370		-	287,81	6,99	9,50							
10.371	254	81150	452	291,47	6,99	9,50	304,90	293,75	293,75	304,90		
10.372	255	81175	688	297,80	6,99	9,50	311,20	300,05	300,05	311,20		
10.373	256	81200	453	304,17	6,99	9,50	317,60	306,45	306,45	317,60		
10.373/1		648	310,50	6,99	9,50							
10.374	257	81250	454	316,87	6,99	9,50	330,30	319,15	319,15	330,30		
10.374/1		649	323,20	6,99	9,50							
10.375	258	81300	455	329,57	6,99	9,50	343,00	331,85	331,85	343,00		
10.375/1		650	335,90	6,99	9,50	355,70	344,55	344,55	355,70			
10.376	259	81350	456	342,27	6,99	9,50						
10.377	260	81400	457	354,97	6,99	9,50	368,40	357,25	357,25	368,40		
10.378	261	81450	458	367,67	6,99	9,50	381,10	369,95	369,95	381,10		
10.379	262	81500	459	380,37	6,99	9,50	393,80	382,65	382,65	393,80		
10.380	263	81550	460	393,07	6,99	9,50	406,50	395,35	395,35	406,50		
10.381		81600	461	405,26	6,99	9,50						
10.382		81650	462	417,96	6,99	9,50						
10.383		81700	463	430,66	6,99	9,50						
10.384		81750	464	443,36	6,99	9,50						
10.385		81800	465	456,06	6,99	9,50						
10.386		81850	466	468,76	6,99	9,50						
10.387		81900	467	481,46	6,99	9,50						
10.388		81950	468	494,16	6,99	9,50						
10.389		82000	469	506,86	6,99	9,50						
10.390		82100	470	532,26	6,99	9,50						
10.391		82200	471	557,66	6,99	9,50						
10.392		82300	472	582,68	6,99	9,50						
10.393		82400	473	608,08	6,99	9,50						
10.394		82500	474	633,48	6,99	9,50						
10.395		82600	475	656,88	6,99	9,50						

TECNORING

Guarnizioni per
TENUTE STATICHE
STATIC seals

O-RING GKS

