



Направляющие кольца AFI-AFE хорошо подходят для замены колец из полиацетала в условиях тяжелой работы. Обладают отличным скольжением, стойкостью к особо сильным нагрузкам и вибрациям.

ОСНОВНЫЕ ПОКАЗАТЕЛИ

Легкость в установке

Износостойкость

Стойкость к деформациям

УСЛОВИЯ РАБОТЫ

Скорость: 1,0 м/с

Температура: -40°C - +130°C

Guide Rings AFI-AFE manufactured for assembly on rod or piston application for simple and double-acting cylinders.

Particularly suitable for replacing the traditional acetal resin guide ring, the AGI-AGE are produced in phenolic fabric, a material characterized with excellent resistance to heavy loads and high temperatures.

Principally used in applications that demand continuous reliability such as cargo handling cranes, earth moving equipment, and front mounted telescopic cylinders where disalignment and vibration are normal working conditions.

GENERAL FEATURES

Ease of mounting

High abrasion resistance


High extrusion resistance

Low deformation value

WORKING CONDITIONS

speed: = 1 m/s

temperature: -40°C + 130°C

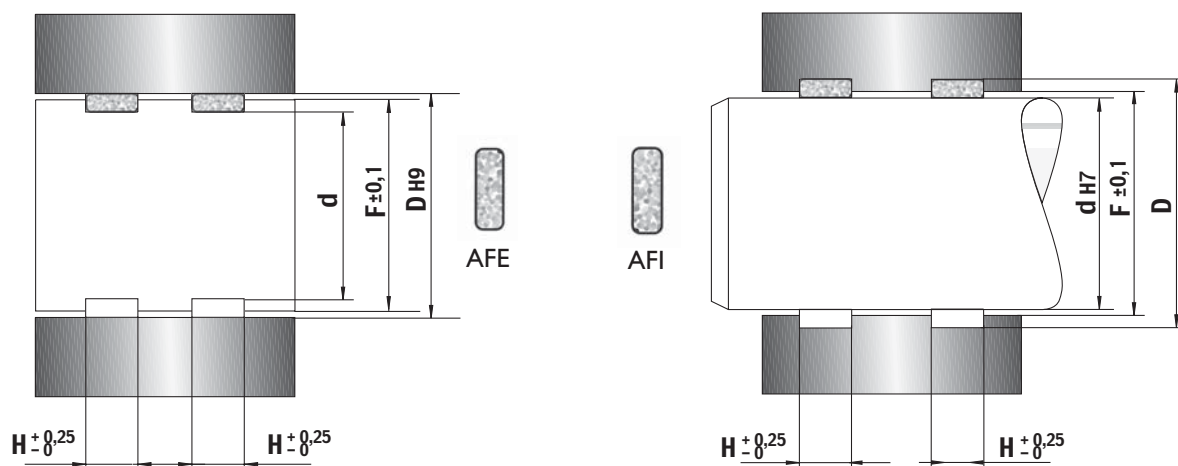

Our ref.	Housing dimensions			
	d	D	H	
AFI-AFE 40-45-9,7	40,00	45,00	9,70	
AFI-AFE 45-50-9,7	45,00	50,00	9,70	
AFI-AFE 50-55-9,7	50,00	55,00	9,70	
AFI-AFE 55-60-9,7	55,00	60,00	9,70	
AFI-AFE 60-65-9,7	60,00	65,00	9,70	
AFI-AFE 65-70-9,7	65,00	70,00	9,70	
AFI-AFE 75-70-9,7	70,00	75,00	9,70	
AFI-AFE 80-75-9,7	75,00	80,00	9,70	
AFI-AFE 80-85-9,7	80,00	85,00	9,70	
AFI-AFE 85-90-9,7	85,00	90,00	9,70	
AFI-AFE 90-95-9,7	90,00	95,00	9,70	
AFI-AFE 100-95-9,7	95,00	100,00	9,70	
AFI-AFE 100-105-9,7	100,00	105,00	9,70	
AFI-AFE 105-110-9,7	105,00	110,00	9,70	
AFI-AFE 110-115-9,7	110,00	115,00	9,70	
AFI-AFE 115-120-9,7	115,00	120,00	9,70	
AFI-AFE 120-125-9,7	120,00	125,00	9,70	