



机能符号 Spool symbols

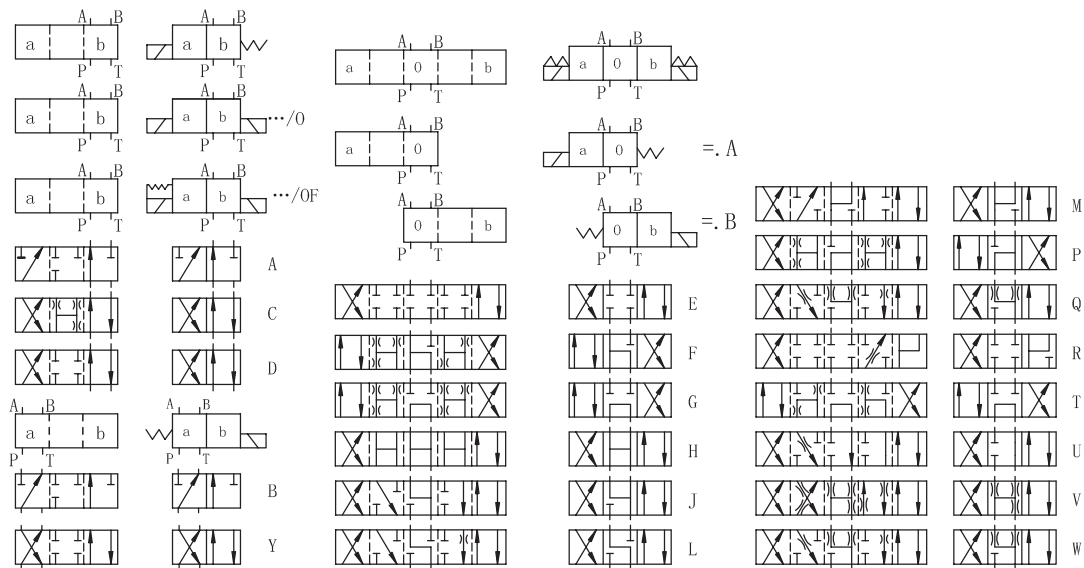


DWG10外型尺寸 DWG10 Subplate Installation Dimensions

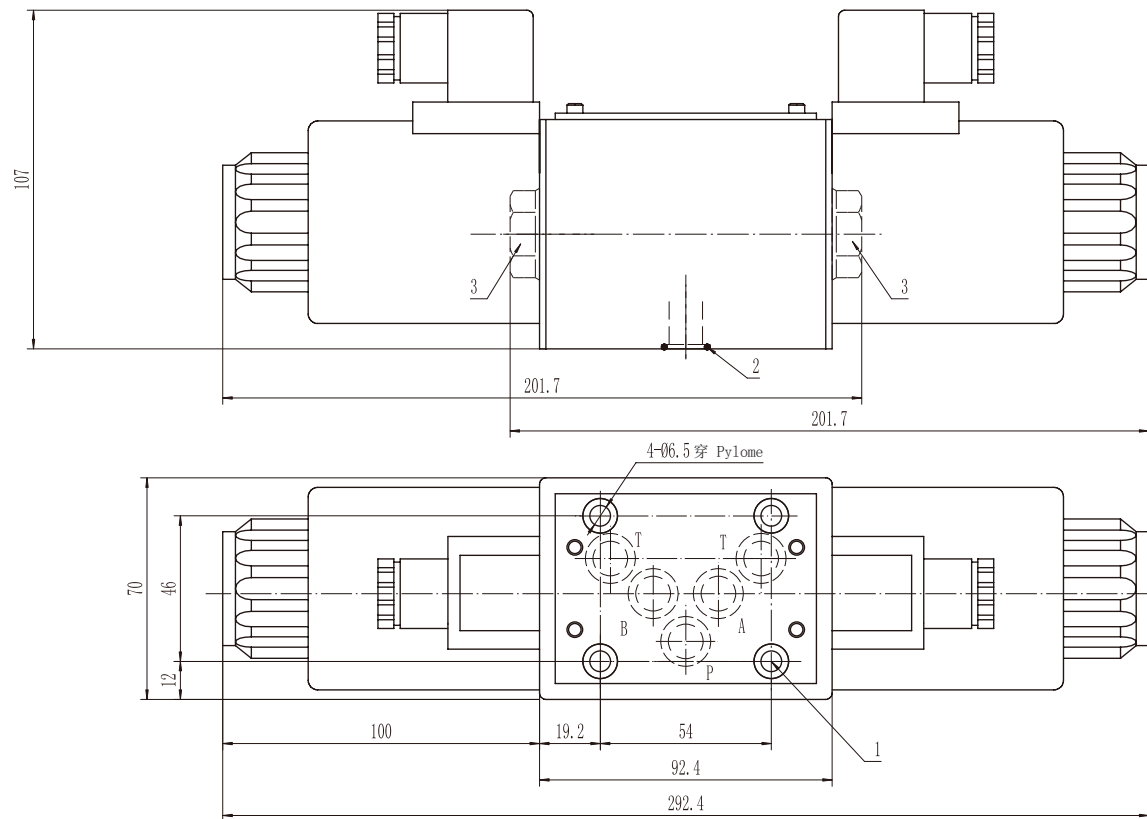

- 1、阀固定螺丝：
4个M6X40 GB/T70.1-12.9级
拧紧扭矩Ma=15.5Nm
- 2、O型圈Φ16X1.9
- 3、用于1个电磁铁阀的堵头
- 1.Valve's set screw:
4 of M6 × 40 GB/T70.1-12.9
Tightening torque Ma=15.5Nm.
- 2.O-ring φ 16 × 1.9
- 3.Plug screw for valves with one solenoid.

DWG10底板安装尺寸 DWG10 Subplate Installation Dimensions

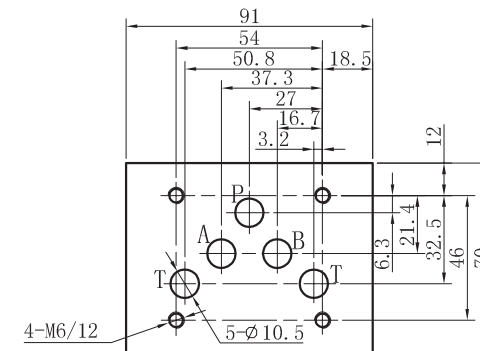

Z1DS10,Z2DS10,Z2FDS10,ZPB10,
ZPR10 安装尺寸相同
Installations are the same with
Z1DS10,Z2SD10,Z2FDS10,ZPB10,
ZPR10

4	DWG	10	E	30	/	*	DC24	Z5L	/	*	*	*
---	-----	----	---	----	---	---	------	-----	---	---	---	---

3=三油口
4=四油口
3=3-way
4=4-way

通径 10 Size 10

机能符号 Spool type

系列号 30=30螺纹连接电磁铁

Series 30=30 Solenoid coils with
thread connection

O=无复位弹簧;OF=带定位器;无=弹簧复位

No code=With spring return;O=Without spring return
OF=Without spring return with deten

电压 Voltage
DC12;DC24 ;AC110;AC220

For further details 附加说明

无=丁晴橡胶 V=氟橡胶
No code=NBR seals
V=FPM seals

无=无插装节流器 B0.8=节流孔径0.8
B10=节流孔径1.0;B12=节流孔径1.2
No code=Without orifice insert
B0.8=Orifice size0.8mm
B10=Orifice size1.0mm
B12=Orifice size1.2mm

Z5L=带灯大方形插头
Z5L=Large quadrate plug with light