


MOP.06.6 多回路选择阀

MOP.06.6 FLOW DIVERTERS

符号 SYMBOL




MOP.06.6管式连接的多回路选择阀，最多可以5个元件连接在一起，供给6个回路工作。这种阀可以以最小的压力损失控制系统的油路。

The stackable circuit selector valves, type MOP.06.6, allows one single drive of 6 users with 5 elements connected in series. As they are moved from high performances solenoids they don't need the external drainage . This valves can manage high hydraulic powers with a minimal pressure drop.


技术参数 Technical data

型号 Model	MOP.06.6
最大流量 (L/min) Max Flow rate (L/min)	50
最大工作压力 (Mpa) Max operating pressure (MPa)	25
阀体 (材料) 表面处理 Valve body (Material) Surface treatment	(铸件) 表面磷化处理 / (casting) phosphating surface
油液清洁度 Oil cleanliness	NAS1638 9级和ISO4406 20/18/15级 NAS1638 class 9 and ISO4406 class 20/18/15

特性曲线 (在使用 HLP46 , 油=40℃ ± 5℃ 时测得)
Characteristic curves (measured with HLP46 , Voil=40℃ ± 5℃)

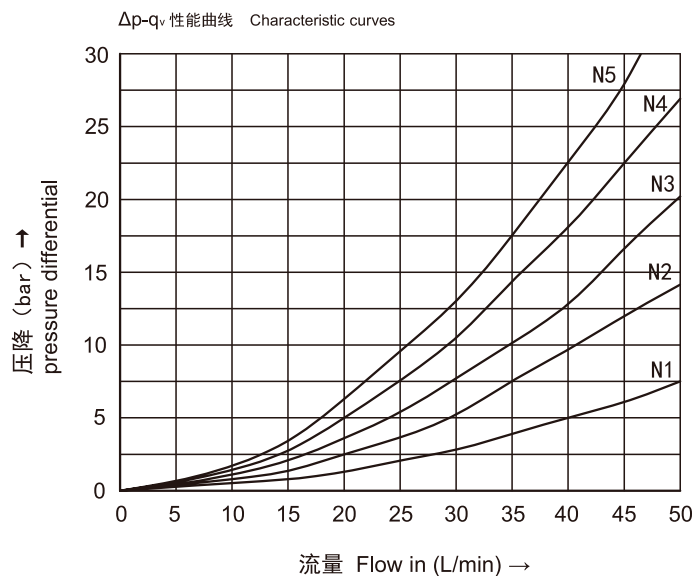


安装尺寸 Installation Dimensions

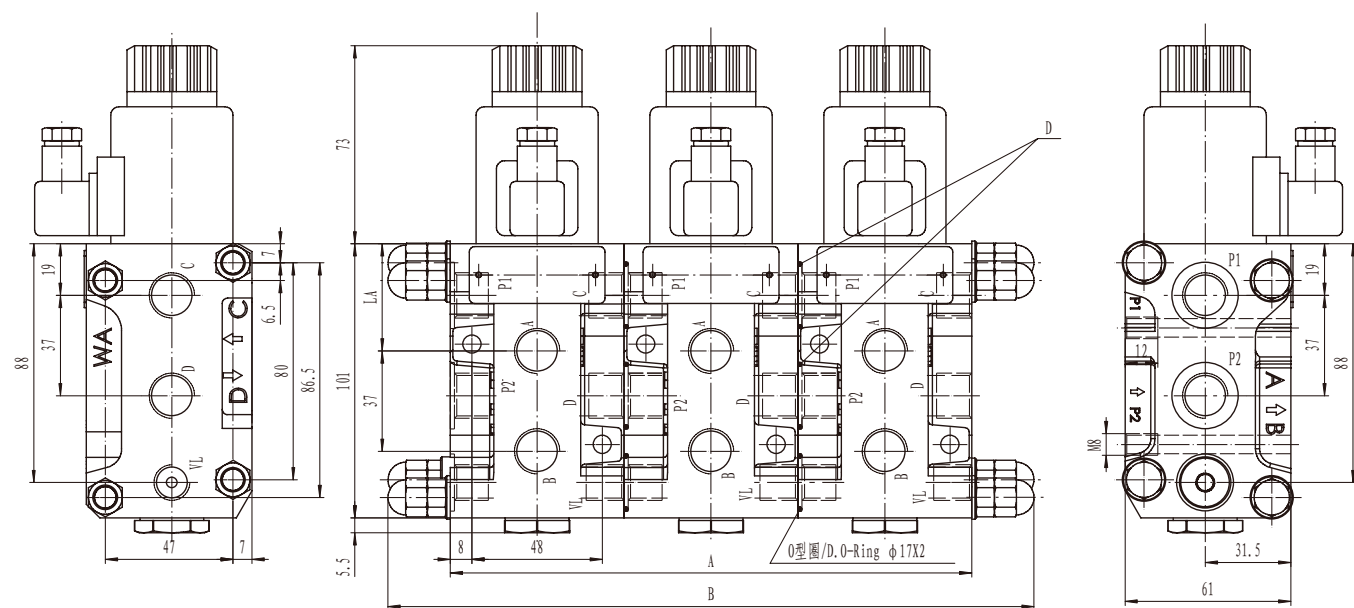

LA=39.5(G3/8,M18X1.5)
38.5(SAE8)
37.5(G1/2,M22X1.5)

D.O 型圈 / D.O-Ring:
M18X1.5/G3/8=Φ21X2
M22X1.5/G1/2=Φ23.5X2
SAE8=Φ 26X2

元件 elements	通路 way	A	B
个数 No. of		长度(mm) Lengths (mm)	
1	6	64	—
2	8	128	174
3	10	192	238
4	12	256	302
5	14	320	366

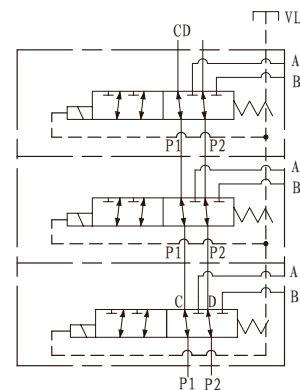

多回路选择阀
Stackble circuit
selector valve

6通径 Size NG06

油口的个数 (单个元件)
No. of way(single element)

螺纹连接 Threaded connection
G 3/8 SAE 8

电压 Voltage
DC12;DC24

叠加的元件的个数: 1/2/3/4/5
QTY of elements:1/2/3/4/5

泄漏油外排
Externally drainage