




**Hidro
Pnevmo
Tehnika**

3, Eng. Felix Vozhely St.,
6100 Kazanlak, Bulgaria
Tel.: +359 431 62 228
+359 431 68 440
e-mail: info@hpt-bg.com
www.hpt-bg.com



FLOW CONTROL VALVE THREE-WAY

VRF C3/./..



VRF C3/V/..

VRF C3/L/..

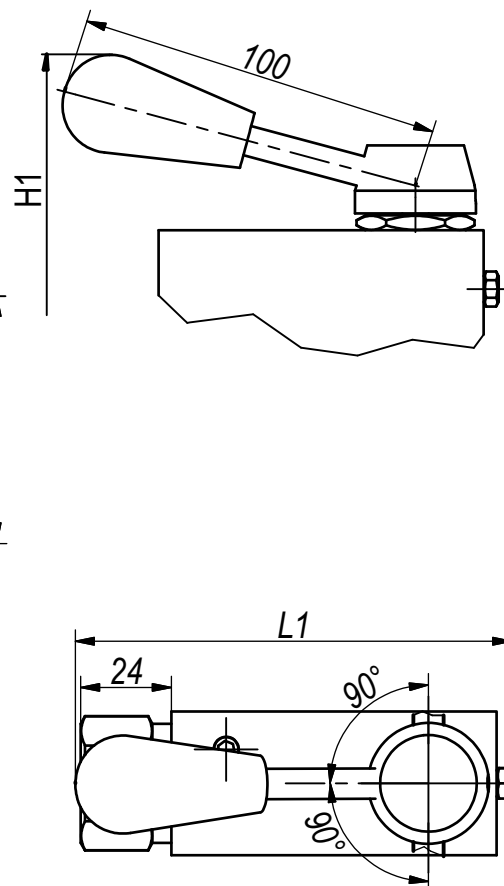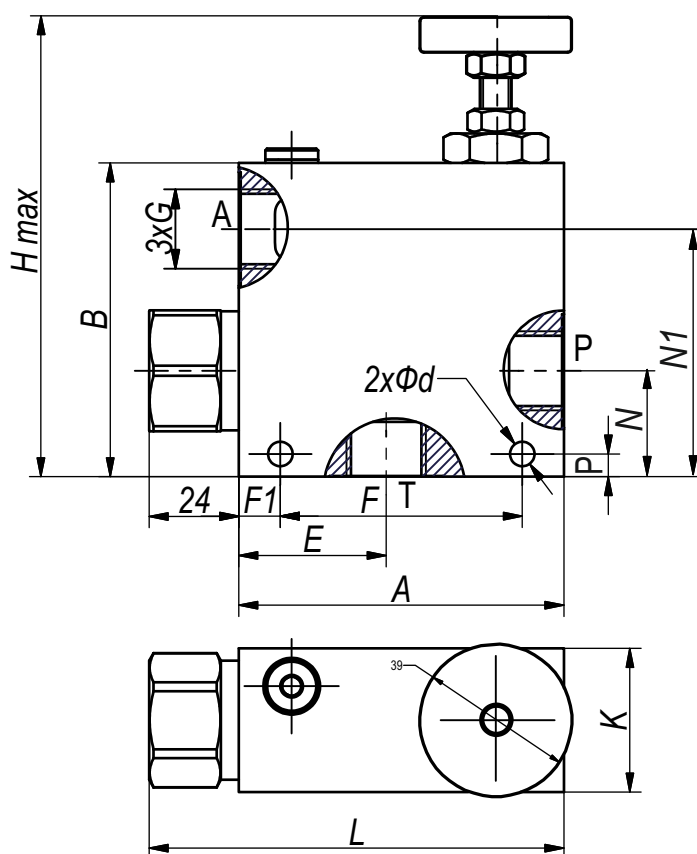

Type	P _{max}	Q _{min}	Q _{max} [L/min]		G	A	B	E	F	F1	N	N1	P	K	H	H1	L	L1	d
	bar	L/min	At port P	At port A		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
VRF C3/./38	250	2	50	30	G3/8"	86	83	39	64	11	28	65,5	6	38	126	129	110	115	6,5
VRF C3/./12			80	50	G1/2"	91	110	39	75	8	34	87,5	7	50	151	-	115	-	8,5
VRF C3/V/34			120	70	G3/4"	95				10	35				-	160	-	129	
VRF C3/L/34																			

All performances and calibration are carried out by using hydraulic oil with viscosity approx. 46 cSt at 50°C .

Temperature range: -20°C...+80°C

Filtration absolute: 25 µm

ORDERING CODE

