


Hand pumps

PM 6-12-25-45 s

Tech sheet



DETAILS
 with 4/3 flow divider
 with release lever
 double acting hand pump for a single acting cylinder
 for fixing to tank

SPECIFICATIONS
 Cast iron body
 Piston treated with Niploy
 White zinc plated support lever
 Lever connection Ø 27
 White zinc plated external parts
 Standard colour black
 Oil tank mounting kit included

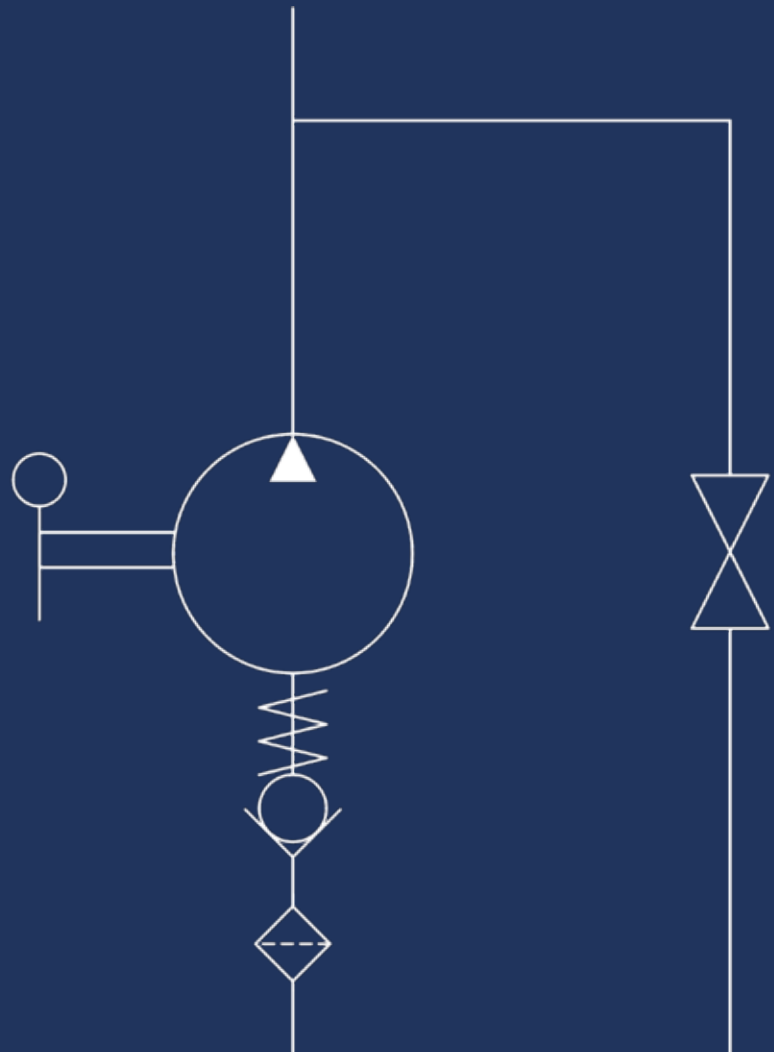

On Demand ATEX Certificates
 II2G Ex h IIB TX Gb
 II2D Ex h IIIB TX Db

EFFORT DIAGRAM

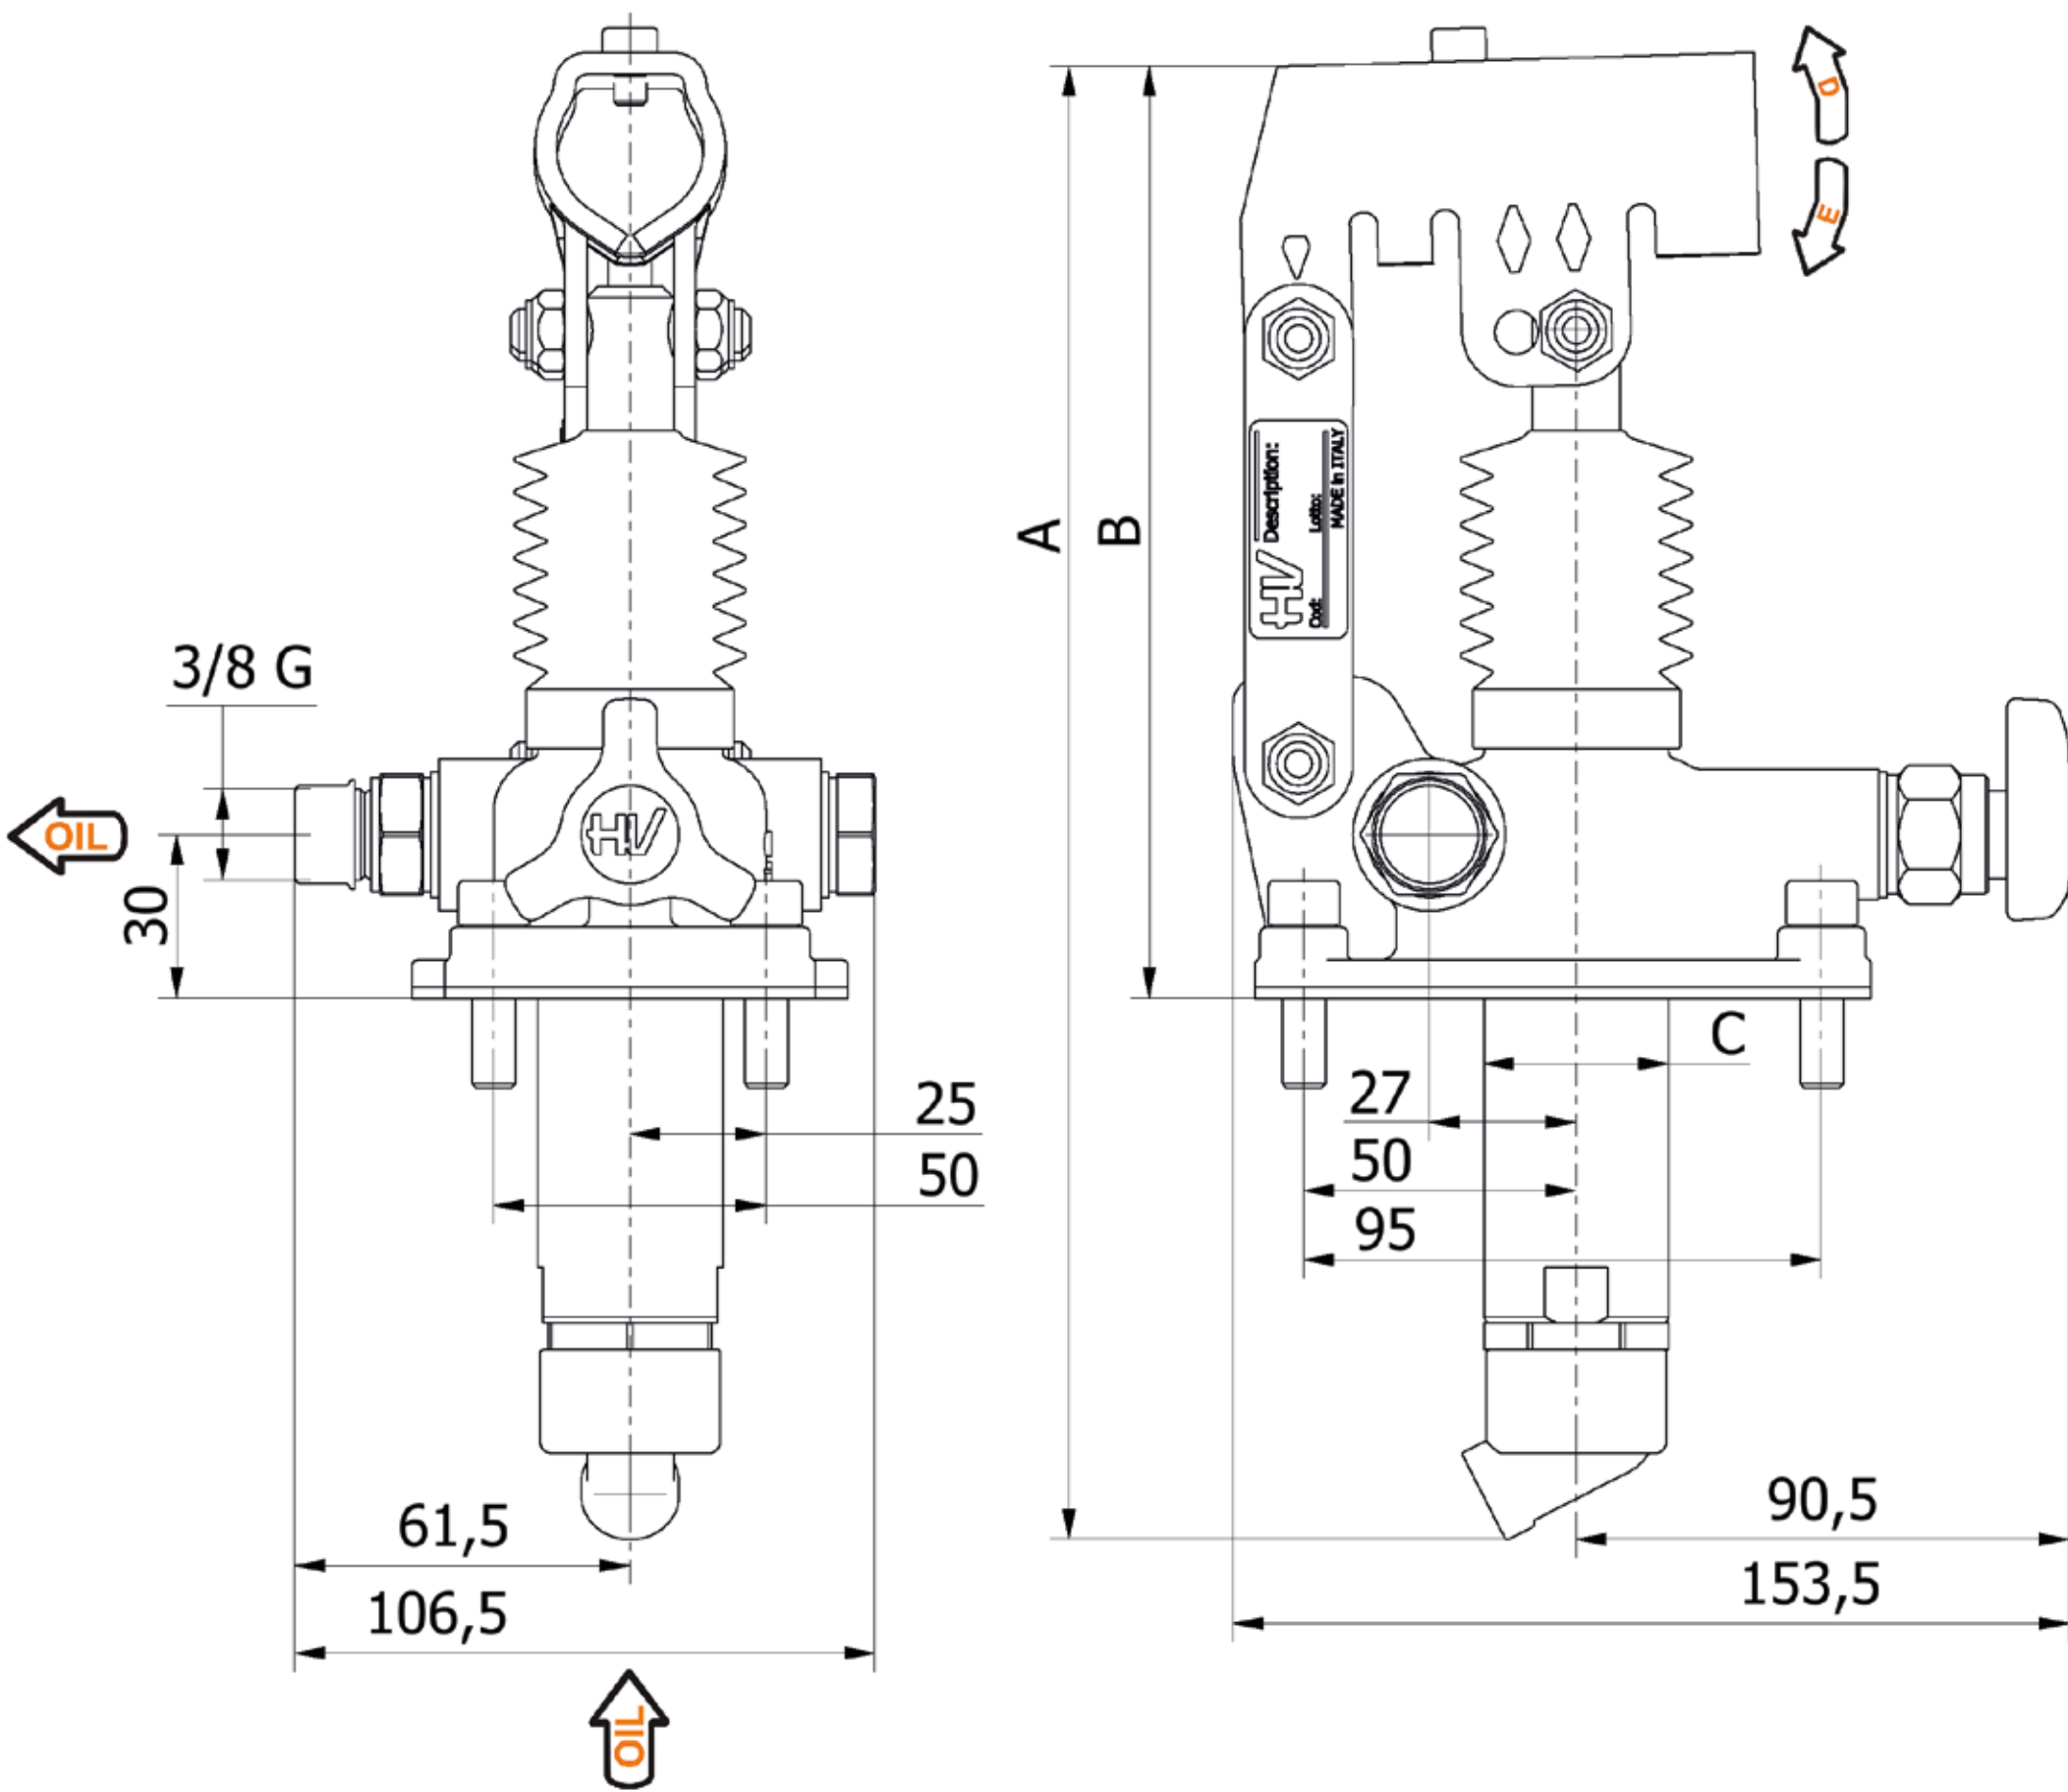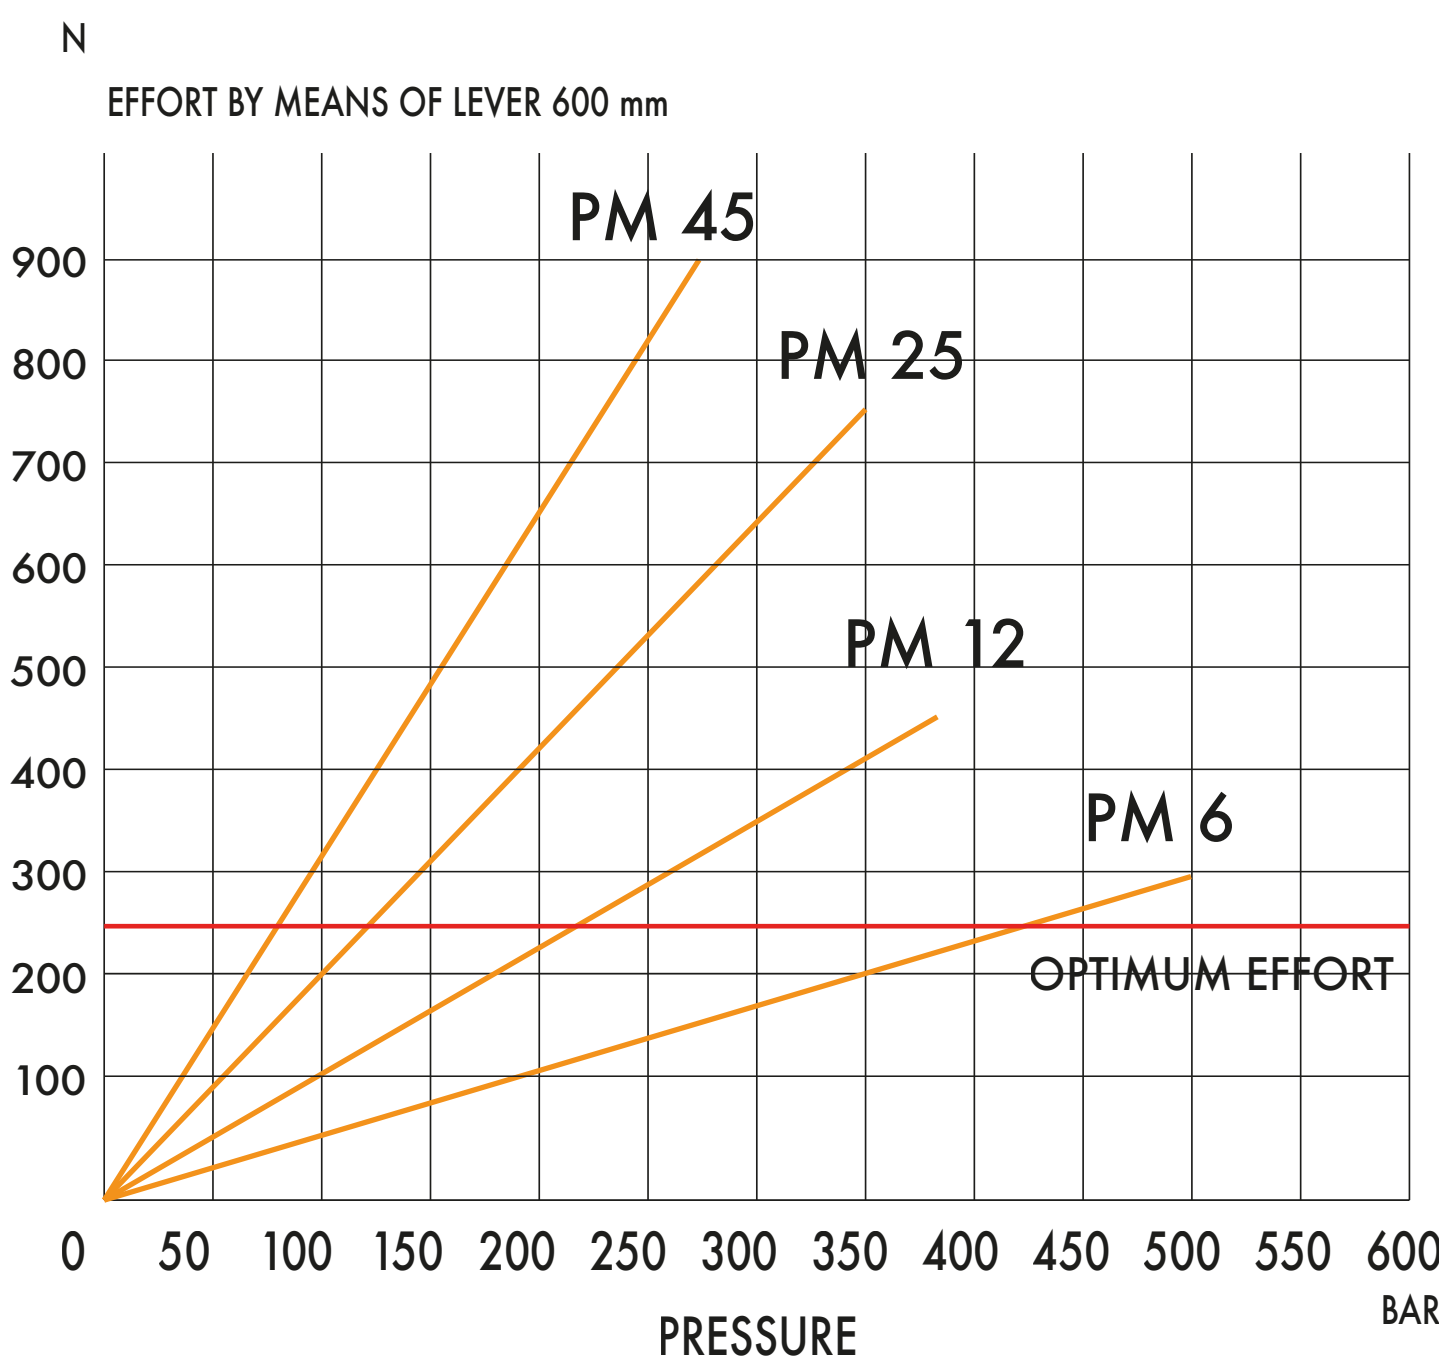

DISPLACEMENT cm ³	A mm	B mm	C mm	D °	E °	ACTUAL DISPLACEMENT cm ³	PRESSURE BAR		MASS KG	CODE
							OPTIMAL	MAX		
6	253	166	34	26	31	6,970	420	500	2,900	6049.0116
12	253	166	34	26	31	12,095	220	380	2,900	6050.0116
25	273	172	34	30	30	25,280	120	350	2,950	6051.0116
45	283	172	40	45	33	44,532	80	280	3,000	6052.0116