


## Swivel ball joint Mod. GA



ISO 8139.  
Material: zinc-plated steel




| Mod.      | $\varnothing$ CN <sup>(17)</sup> | U    | EN | ER | AX | CE | KK       | $\varnothing$ T | Z   | SW |
|-----------|----------------------------------|------|----|----|----|----|----------|-----------------|-----|----|
| GA-32     | 10                               | 10,5 | 14 | 14 | 20 | 43 | M10X1,25 | 15              | 6,5 | 17 |
| GA-40     | 12                               | 12   | 16 | 16 | 22 | 50 | M12X1,25 | 17,5            | 6,5 | 19 |
| GA-50-63  | 16                               | 15   | 21 | 21 | 28 | 64 | M16X1,5  | 22              | 7,5 | 22 |
| GA-80-100 | 20                               | 18   | 25 | 25 | 33 | 77 | M20x1,5  | 27,5            | 7   | 30 |

## Piston rod socket joint Mod. GY



Material: zama and zinc-plated steel

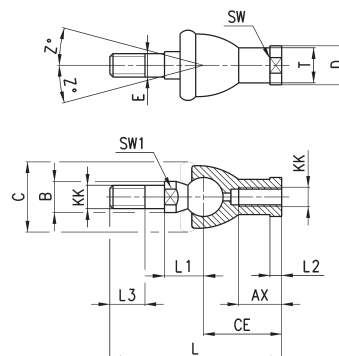


| Mod.      | Size   | KK       | AX | CE | E  | L   | L1   | L2  | L3 | SW | SW1 | $\varnothing$ B | $\varnothing$ C | $\varnothing$ D | $\varnothing$ T | Z   |
|-----------|--------|----------|----|----|----|-----|------|-----|----|----|-----|-----------------|-----------------|-----------------|-----------------|-----|
| GY-32     | 32     | M10X1.25 | 18 | 35 | 10 | 74  | 19.5 | 6.5 | 15 | 17 | 11  | 14              | 28              | 19              | 15              | 15  |
| GY-40     | 40     | M12X1.25 | 20 | 40 | 12 | 84  | 21   | 6.5 | 17 | 19 | 17  | 19              | 32              | 22              | 17.5            | 15  |
| GY-50-63  | 50-63  | M16X1.5  | 27 | 50 | 16 | 112 | 27.5 | 8   | 23 | 22 | 19  | 22              | 40              | 27              | 22              | 11  |
| GY-80-100 | 80-100 | M20X1.5  | 38 | 63 | 20 | 133 | 31.5 | 10  | 25 | 30 | 24  | 27              | 45              | 34              | 27.5            | 7.5 |

## Rod fork end Mod. G



ISO 8140  
Material: zinc-plated steel




| Mod.     | $\varnothing$ CK | LE | CM | CL | ER | CE | KK         | B  | $\varnothing$ B1 |
|----------|------------------|----|----|----|----|----|------------|----|------------------|
| G-25-32  | 10               | 20 | 10 | 20 | 12 | 40 | M10 X 1.25 | 26 | 18               |
| G-40     | 12               | 24 | 12 | 24 | 14 | 48 | M12 X 1.25 | 32 | 20               |
| G-50-63  | 16               | 32 | 16 | 32 | 19 | 64 | M16 X 1.5  | 40 | 26               |
| G-80-100 | 20               | 40 | 20 | 40 | 25 | 80 | M20 X 1.5  | 48 | 34               |

## Piston rod lock nut Mod. U



ISO 4035  
Material: zinc-plated steel



| Mod.     | D        | m | SW |
|----------|----------|---|----|
| U-25-32  | M10X1.25 | 6 | 17 |
| U-40     | M12X1.25 | 7 | 19 |
| U-50-63  | M16X1.5  | 8 | 24 |
| U-80-100 | M20x1.5  | 9 | 30 |