


■ 用于液压部件的杆端关节轴承 **GF.LO** 系列

KGBAL®

ROD ENDS FOR HYDRAULIC COMPONENTS GF.LO SERIES

需维护、焊接型 Requiring maintenance, for welding

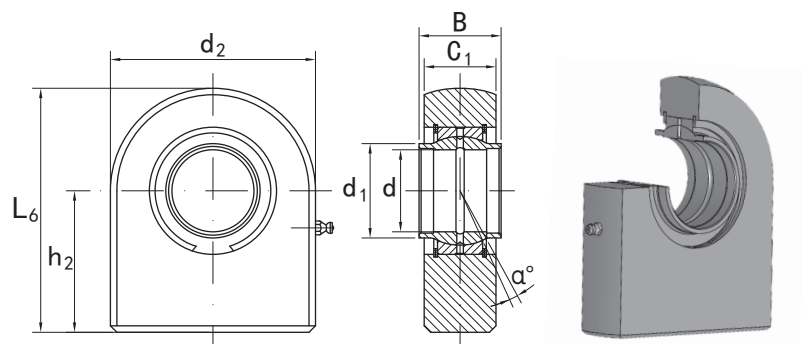

壳体Housing	内圈Inner ring	外圈Outer ring
合金钢Alloy steel	轴承钢Bearing steel	轴承钢Bearing steel
	热处理Heat treated:HRC58-64	热处理Heat treated:HRC54-60
	磷化Phosphating	磷化Phosphating
摩擦副Sliding contact surfaces:		钢/钢 Steel/Steel

型号 Part No.	尺寸 Dimensions mm								载荷Load ratings kN		重量 Weight kg
	d	B	C ₁	d ₂	L ₆	h ₂	d ₁	α ≈	动载荷 Dynamic	静载荷 Static	
GF 16 LO	16	16	17.5	48	59	35	20	4	17	40	0.3
GF 20 LO	20	20	19	50	63	38	25	4	30	74	0.36
GF 25 LO	25	25	23	55	72.5	45	30.5	4	48	95	0.54
GF 32 LO	32	32	27	70	100	65	38	4	62.5	168	1.12
GF 40 LO	40	40	35	100	119	69	46	4	100	268	2.5
GF 50 LO	50	50	40	123	149.5	88	57	4	156	362	4.6
GF 63 LO	63	63	50	145	179.5	107	71.5	4	248	570	9.3
GF 70 LO	70	70	55	164	197	115	79	4	315	800	11.25
GF 80 LO	80	80	60	180	231	141	91	4	400	874	15.75
GF 90 LO	90	90	65	226	263	150	99	4	490	1045	24
GF 100 LO	100	100	70	250	295	170	113	4	610	1330	33.95
GF 110 LO	110	110	80	295	332.5	185	124	4	655	1490	49

——也可提供2RS型结构，例如：GF 70 HO 2RS。

——Sealed version also available, e.g. GF 70 HO 2RS.