


■ 用于液压部件的杆端关节轴承 **GIHO-K..DO** 系列

KGBAL®

ROD ENDS FOR HYDRAULIC COMPONENTS GIHO-K..DO SERIES

需维护、内螺纹、带锁紧螺母型 Requiring maintenance, with female thread and locking nuts

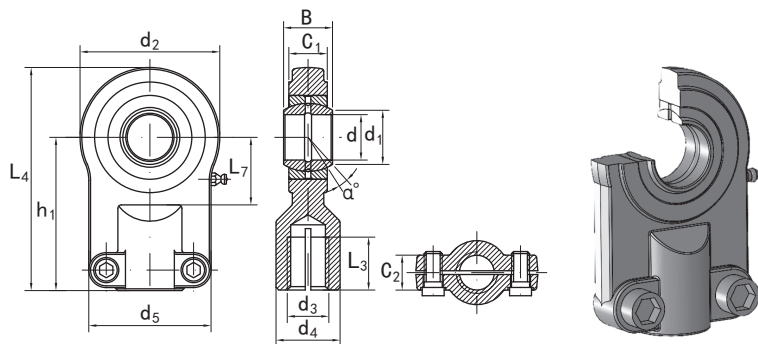

壳体Housing	内圈Inner ring	外圈Outer ring
碳钢Carbon steel	轴承钢Bearing steel	轴承钢Bearing steel
	热处理Heat treated:HRC58-64	热处理Heat treated:HRC54-60
	磷化Phosphating	磷化Phosphating
摩擦副Sliding contact surfaces:		钢/钢 Steel/Steel

型号 Part No.		尺寸 Dimensions														载荷Load ratings kN		重量 Weight kg
右螺纹 Right hand	左螺纹 Left hand	d	d ₃ 6H	d ₄	L ₃ min	B	C ₁	d ₂	L ₇ min	h ₁	L ₄	d ₅	d ₁	C ₂	α ≈	动载荷 Dynamic	静载荷 Static	
GIHO-K 12 DO*	GIHO-KL 12 DO*	12	M10×1.25	17	15	10	8	35	16	42	59.5	35	15	13	11	10.8	17	0.12
GIHO-K 16 DO	GIHO-KL 16 DO	16	M12×1.25	21	17	14	11	45	20	48	70.5	45	20.7	13	10	21.1	28.5	0.22
GIHO-K 20 DO	GIHO-KL 20 DO	20	M14×1.5	25	19	16	13	55	25	58	85.5	55	24.2	17	9	30	42.5	0.43
GIHO-K 25 DO	GIHO-KL 25 DO	25	M16×1.5	30	23	20	17	65	30	68	100.5	62	29.3	17	7	48	67	0.67
GIHO-K 30 DO	GIHO-KL 30 DO	30	M20×1.5	36	29	22	19	80	35	85	125	77	34.2	19	6	62	108	1.25
GIHO-K 40 DO	GIHO-KL 40 DO	40	M27×2.0	45	37	28	23	100	45	105	155	90	45	23	7	100	156	2.16
GIHO-K 50 DO	GIHO-KL 50 DO	50	M33×2.0	55	46	35	30	120	58	130	190	105	55.9	30	6	156	245	3.9
GIHO-K 60 DO	GIHO-KL 60 DO	60	M42×2.0	68	57	44	38	160	68	150	230	134	66.8	38	6	245	380	7.15
GIHO-K 80 DO	GIHO-KL 80 DO	80	M48×2.0	90	64	55	47	205	82	185	287.5	156	89.4	47	6	400	585	15
GIHO-K 100 DO	GIHO-KL 100 DO	100	M64×3.0	110	86	70	55	240	116	240	360	190	109.5	55	7	610	865	27.3

——带"*"的型号均不能润滑。

——Relubrication not available for sizes marked "**".