


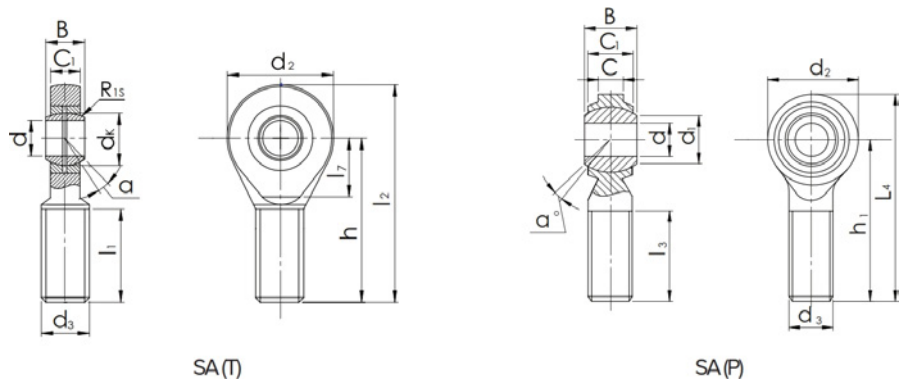

ISO	Dimensions (mm)												Basic Load Rating (N)		Weight (kg)	
	d	d3	B	C1	l1	d2	l7	h	l2	dK	R1s	a	≡	Dyn. C		Stat. C ₀
		6g			min		min									
SA/SAL5 T/K	5	M5x0,8	8	6	19	18	-	33	42	11.11	0.3	13		5.7	6	0.0130
SA/SAL6 T/K	6	M6x1,0	9	6.75	21	20	-	36	46	12.7	0.3	13		7.2	7.65	0.0200
SA/SAL8 T/K	8	M8x1,25	12	9	25	24	-	42	54	15.875	0.3	14		11.6	12.9	0.0380
SA/SAL10 T/K	10	M10x1,5	14	10.5	28	28	-	28	62	19.05	0.3	13		14.5	18	0.0550
SA/SAL12 T/K	12	M12x1,75	16	12	32	32	-	54	70	22.225	0.3	13		17	24	0.0850
SA/SAL12-1 T/K	12	M12x1,25	16	12	32	32	-	54	70	22.225	0.3	13		17	24	0.0850
SA/SAL14 T/K	14	M14x2,0	19	13.5	36	36	18	60	78	25.4	0.3	16		24	31	0.1400
SA/SAL16 T/K	16	M16x2,0	21	15	37	42	21	66	87	28.575	0.3	15		28.5	39	0.2100
SA/SAL16-1 T/K	16	M16x1,5	21	15	37	42	21	66	87	28.575	0.3	15		28.5	39	0.2100
SA/SAL18 T/K	18	M18x1,5	23	16.5	41	44	22	72	94	31.75	0.3	15		42.5	47.5	0.2800
SA/SAL20 T/K	20	M20x1,5	25	18	45	50	25	78	103	34.925	0.3	14		42.5	57	0.3800
SA/SAL22 T/K	22	M22x1,5	28	20	48	54	27	84	111	38.1	0.3	15		57	68	0.4800
SA/SAL25 T/K	25	M24x2,0	31	22	55	60	30	94	124	42.86	0.3	15		68	85	0.6400
SA/SAL28 T/K	28	M27x2,0	35	24	62	66	33	103	136	47.63	0.3	15		86	107	0.8000
SA/SAL30 T/K	30	M30x2,0	37	25	66	70	35	110	145	50.8	0.3	17		88	114	1.1000
SA/SAL35 T/K	35	M36x2,0	43	28	85	81	40	140	180.5	57.15	0.3	16		-	-	1.6400
SA/SAL40 T/K	40	M42x2,0	49	33	90	91	45	150	195.5	66.67	0.3	17		-	-	2.3000
SA/SAL50 T/K	50	M48x2,0	60	45	105	117	58	185	243.5	82.5	0.3	12		-	-	4.8000

ISO	Dimensions mm											Basic Load Rating (N)		Weight (kg)
	d	d1	d3	B	C	C2	d2	h1	L4	l3	a	Dyn. C	Stat. C ₀	
			6g								≡			
SA/SAL5 P/K	5	7.7	M5x0,8	8	6	2.9	19	33	42.5	20	12	5700	6000	0.014
SA/SAL6 P/K	6	8.9	M6x1,0	9	6.7	2.9	21	36	46.5	22	11	7200	7650	0.020
SA/SAL8 P/K	8	10.3	M8x1,25	12	9	4.5	25	42	54.5	25	12	11600	12900	0.038
SA/SAL10 P/K	10	12.9	M10x1,5	14	11	4.5	29	48	62.5	29	12	14500	18000	0.055
SA/SAL12 P/K	12	15.4	M12x1,75	16	12	6	33	54	70.5	33	13	17000	24000	0.085
SA/SAL14 P/K	14	16.8	M14x2,0	19	14	6.5	37	60	78.5	36	14	24000	31000	0.140
SA/SAL16 P/K	16	19.3	M16x2,0	21	15	7	43	66	87.5	40	14	28500	39000	0.210
SA/SAL18 P/K	18	21.8	M18x1,5	23	17	7	47	72	95.5	44	14	42500	47500	0.280
SA/SAL20 P/K	20	24.3	M20x1,5	25	18	8	51	78	103.5	47	14	42500	57000	0.380
SA/SAL22 P/K	22	25.8	M22x1,5	28	20	8.8	55	84	111.5	50	15	57000	68000	0.480
SA/SAL25 P/K	25	29.5	M24x2,0	31	22	11	61	94	124.5	57	15	68000	85000	0.640