


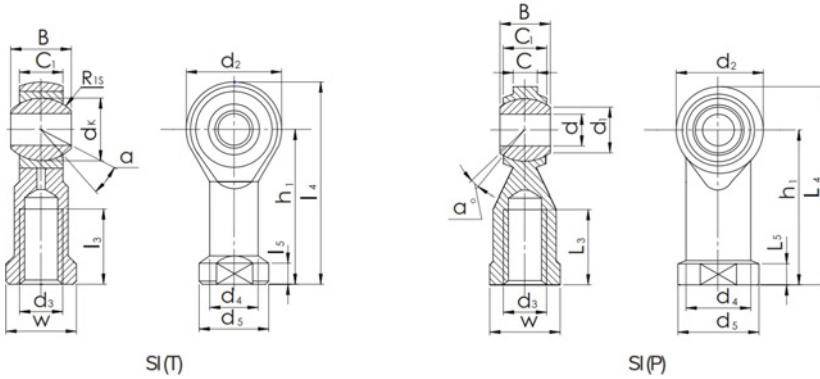

ISO	Dimensions (mm)															Basic Load Rating (N)		Weight (kg)
	d	d3	B	C1	I3	W	d2	h1	l4	I5	d4	d5	dK	R1s	a	Dyn. C	Stat. C ₀	
		6H			min										≈			
SI/SIL5 T/K	5	M5x0,8	8	6	10	9	18	27	36	4	8.5	11	11,11	0.3	13	5700	6000	0.016
SI/SIL6 T/K	6	M6x1,0	9	6.75	12	11	20	30	40	5	10	13	12.7	0.3	13	7200	7650	0.022
SI/SIL8 T/K	8	M8x1,25	12	9	16	14	24	36	48	5	12.5	16	15.875	0.3	14	11600	12900	0.047
SI/SIL10 T/K	10	M10x1,5	14	10.5	20	17	28	43	57	6.5	15	19	19.05	0.3	13	14500	18000	0.077
SI/SIL10-1 T/K	10	M10x1,25	14	10.5	20	17	28	43	57	6.5	15	19	19.05	0.3	13	14500	18000	0.077
SI/SIL12 T/K	12	M12x1,75	16	12	22	19	32	50	66	6.5	17.5	22	22.225	0.3	13	17000	24000	0.100
SI/SIL12-1 T/K	12	M12x1,25	16	12	22	19	32	50	66	6.5	17.5	22	22.225	0.3	13	17000	24000	0.100
SI/SIL14 T/K	14	M14x2,0	19	13.5	25	22	36	57	75	8	20	25	25.4	0.3	16	24000	31000	0.160
SI/SIL14-1 T/K	14	M14x1,5	19	13.5	25	22	36	57	75	8	20	25	25.4	0.3	16	24000	31000	0.160
SI/SIL16 T/K	16	M16x2,0	21	15	28	22	42	64	85	8	22	27	28.575	0.3	15	28500	39000	0.220
SI/SIL16-1 T/K	16	M16x1,5	21	15	28	22	42	64	85	8	22	27	28.575	0.3	15	28500	39000	0.220
SI/SIL18 T/K	18	M18x1,5	23	16.5	32	27	44	71	93	10	25	31	31.75	0.6	15	42500	47500	0.320
SI/SIL20 T/K	20	M20x1,5	25	18	33	30	50	77	102	10	27.5	34	34.925	0.6	14	42500	57000	0.420
SI/SIL22 T/K	22	M22x1,5	28	20	37	32	54	84	111	12	30	38	38.1	0.6	15	57000	68000	0.540
SI/SIL25 T/K	25	M24x2,0	31	22	42	36	60	94	124	12	33.5	42	42.86	0.3	15	68000	85000	0.720
SI/SIL28 T/K	28	M27x2,0	35	24	51	41	66	103	136	14	37	46	47.63	0.6	15	86000	107000	0.820
SI/SIL30 T/K	30	M30x2,0	37	25	51	41	70	110	145	15	40	50	50.8	0.6	17	88000	114000	1.100
SI/SIL30-1 T/K	30	M27x2,0	37	25	51	41	70	110	145	15	40	50	50.8	0.6	17	88000	114000	1.100
SI/SIL35 T/K	35	M36x2,0	43	28	56	50	81	125	16-5.5	17	46	58	57.15	0.6	16	94000	118000	1.600
SI/SIL40 T/K	40	M42x2,0	49	33	60	55	91	142	187.5	19	53	65	66.67	0.6	16	100000	120000	2.400
SI/SIL50 T/K	50	M48x2,0	60	45	65	65	117	160	21-8.5	23	65	75	82.5	0.6	12	112000	125000	5.000

ISO	Dimensions (mm)															Basic Load Rating (N)		Weight (kg)
	d	d1	d3	B	C1	L3	W	d2	h1	L4	I5	d4	d5	a	Dyn. C	Stat. C ₀		
			7H			min								≈				
SI/SIL5 P/K	5	7.7	M5x0,8	8	6	10	9	19	27	36.5	4	9	11	12	5700	6000	0.0180	
SI/SIL6 P/K	6	8.9	M6x1,0	9	6.7	12	11	21	30	40.5	5	10	13	11	7200	7650	0.0260	
SI/SIL8 P/K	8	10.3	M8x1,25	12	9	16	14	25	36	48.5	5	12.5	16	12	11600	12900	0.0470	
SI/SIL10 P/K	10	12.9	M10x1,5	14	11	20	17	29	43	57.5	6.5	15	19	12	14500	18000	0.0770	
SI/SIL10-1 P/K	10	12.9	M10x1,25	14	11	20	17	29	43	57.5	6.5	15	19	12	14500	18000	0.0770	
SI/SIL12 P/K	12	15.4	M12x1,75	16	12	22	19	33	50	66.5	6.5	17.5	22	13	17000	24000	0.1000	
SI/SIL12-1 P/K	12	15.4	M12x1,25	16	12	22	19	33	50	66.5	6.5	17.5	22	13	17000	24000	0.1000	
SI/SIL14 P/K	14	16.8	M14x2,0	19	14	25	22	37	57	75.5	8	20	25	14	24000	31000	0.1600	
SI/SIL16 P/K	16	19.3	M16x2,0	21	15	28	22	43	64	85.5	8	22	27	14	28500	39000	0.2200	
SI/SIL16-1 P/K	16	19.3	M16x1,5	21	15	28	22	43	64	85.5	8	22	27	14	28500	39000	0.2200	
SI/SIL18 P/K	18	21.8	M18x1,5	23	17	32	27	47	71	94.5	10	25	31	14	42500	47500	0.3200	
SI/SIL20 P/K	20	24.3	M20x1,5	25	18	33	30	51	77	102.5	10	27.5	34	14	42500	57000	0.4200	
SI/SIL22 P/K	22	25.8	M22x1,5	28	20	37	32	55	84	111.5	12	30	38	15	57000	68000	0.5400	
SI/SIL25 P/K	25	29.5	M24x2,0	31	22	42	36	61	94	124.5	12	33.5	42	15	68000	85000	0.7200	