




Minipresa passaparete JIC 37° M 16x2


Bulkhead test coupling - JIC 37° M 16x2



G	H	Ch	S max	PN [bar]	Codice/Ref.
7/16"-20 UNF	67	17	9	630	S11707162C
1/2"-20 UNF	67	17	9	400	S11701220C
9/16"-18 UNF	68	19	9	315	S11709161C

Minipresa con raccordo femmina girevole sede JIC 37° M 16x2


Female swivel test coupling - JIC 37° M 16x2

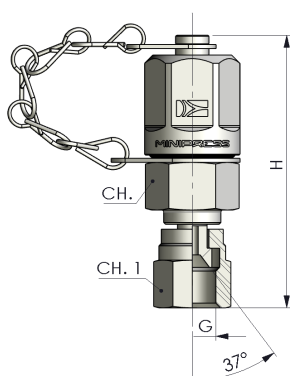

G	H	Ch	Ch 1	PN [bar]	Codice/Ref.
7/16"-20 UNF	57	17	14	630	S11507163C
1/2"-20 UNF	55	17	17	400	S11512203C
9/16"-18 UNF	52	17	17	315	S11509163C
3/4"- 16 UNF	59	19	22	315	S11506163C
7/8"- 14 UNF	64	24	27	315	S11507083C

Minipresa con raccordo femmina fisso sede JIC 37° M 16x2

Female fixed test coupling - JIC 37° M 16x2

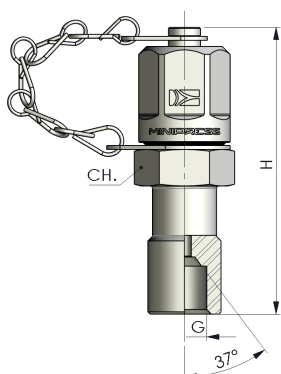


G	H	Ch	PN [bar]	Codice/Ref.
7/16"-20 UNF	63	19	630	S115071FFC
1/2"-20 UNF	63	19	400	S115012FFC
9/16"-18 UNF*	66	19	315	S115091FFC

* Disponibili in acciaio
inossidabile/ Available in
Stainless steel



Minipresa con raccordo femmina girevole O.R.F.S. M 16x2


O.R.F.S female swivel test coupling M 16x2



G	H	Ch	Ch 1	PN [bar]	Codice/Ref.
9/16"-18 UNF	60	17	17	630	S115916FSC
11/16"-16 UNF	62	17	22	630	S115116FSC
13/16"-16 UNF	65	19	27	630	S115131FSC

Minipresa di pressione femmina girevole M 16x2

Female swivel check-coupling M 16x2




G	H	Ch	Ch 1	PN [bar]	Codice/Ref.
ISO 228 G 1/4"*	48	19	17	400	S115914G0C
ISO 228 G 3/8"	48	19	22	400	S115938G0C

* Disponibili in acciaio
inossidabile/ Available in
Stainless steel

Minipresa filettata M 16x2 con dado forato


Threaded test coupling M 16x2 banjo screw



G	H	L	Ch	PN [bar]	Codice/Ref.
ISO 228 G 1/4"	60	26	19	630	S142R2HS0C

Innesto rapido + minipresa 15QC000C

Test quick coupling + test point 15QC000C



Innesto rapido femmina: innestandolo sul maschio consente il controllo dei parametri della pressione dell'olio in un impianto oleodinamico. Si adatta al sistema di misurazione Mini Press, grazie ad una minipresa con filetto di uscita M 16x2 per attacco a microtubo raccordato o portamanometro, avvitata su di esso.

Norma: ISO 15171-2

Applicazione: diagnostica impianti oleodinamici

Pressione di esercizio: 400 bar

Materiale: acciaio zincato

Tenuta: NBR

Female quick coupling: coupling it with the male part to control the parameters of pressure in the hydraulic systems. It has been adapted to the Mini Press diagnostic system through a test coupling male threaded M16X2 (to be connected to a hose assembly or a gauge adapter), screwed on it.

Norm: ISO 15171-2

Application: diagnostic on hydraulic systems

Working pressure: 400 bar

Material: zinc steel

Seal: NBR