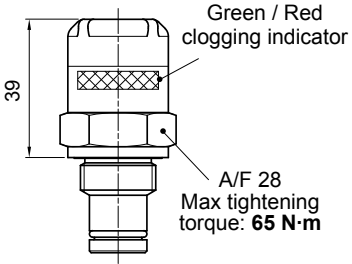



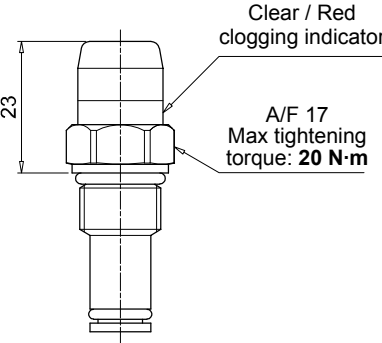



DVA Visual Differential Pressure Indicator <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>1.2 bar ±10%</td><td>DV A 12 x P01</td></tr><tr><td>2.0 bar ±10%</td><td>DV A 20 x P01</td></tr><tr><td>5.0 bar ±10%</td><td>DV A 50 x P01</td></tr><tr><td>7.0 bar ±10%</td><td>DV A 70 x P01</td></tr><tr><td>9.5 bar ±10%</td><td>DV A 95 x P01</td></tr></table>  Green / Red clogging indicator A/F 28 Max tightening torque: 65 N·m 39	Settings	Ordering code	1.2 bar ±10%	DV A 12 x P01	2.0 bar ±10%	DV A 20 x P01	5.0 bar ±10%	DV A 50 x P01	7.0 bar ±10%	DV A 70 x P01	9.5 bar ±10%	DV A 95 x P01	Hydraulic symbol 	Materials - Body: Brass - Internal parts: Brass - Polyamide - Seal: HNBR - FPM Technical data - Reset: Automatic reset - Max working pressure: 420 bar - Proof pressure: 630 bar - Burst pressure: 1260 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 - Degree protection: IP65 according to EN 60529
Settings	Ordering code													
1.2 bar ±10%	DV A 12 x P01													
2.0 bar ±10%	DV A 20 x P01													
5.0 bar ±10%	DV A 50 x P01													
7.0 bar ±10%	DV A 70 x P01													
9.5 bar ±10%	DV A 95 x P01													
DVM Visual Differential Pressure Indicator <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>1.2 bar ±10%</td><td>DV M 12 x P01</td></tr><tr><td>2.0 bar ±10%</td><td>DV M 20 x P01</td></tr><tr><td>5.0 bar ±10%</td><td>DV M 50 x P01</td></tr><tr><td>7.0 bar ±10%</td><td>DV M 70 x P01</td></tr><tr><td>9.5 bar ±10%</td><td>DV M 95 x P01</td></tr></table>  Red clogging indicator A/F 30 Max tightening torque: 65 N·m 34	Settings	Ordering code	1.2 bar ±10%	DV M 12 x P01	2.0 bar ±10%	DV M 20 x P01	5.0 bar ±10%	DV M 50 x P01	7.0 bar ±10%	DV M 70 x P01	9.5 bar ±10%	DV M 95 x P01	Hydraulic symbol 	Materials - Body: Brass - Internal parts: Brass - Polyamide - Seal: HNBR - FPM Technical data - Reset: Manual reset - Max working pressure: 420 bar - Proof pressure: 630 bar - Burst pressure: 1260 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 - Degree protection: IP65 according to EN 60529
Settings	Ordering code													
1.2 bar ±10%	DV M 12 x P01													
2.0 bar ±10%	DV M 20 x P01													
5.0 bar ±10%	DV M 50 x P01													
7.0 bar ±10%	DV M 70 x P01													
9.5 bar ±10%	DV M 95 x P01													
DVS Visual Differential Pressure Indicator Connection: EN 175301-803 <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>1.2 bar ±10%</td><td>DV S 12 H P01</td></tr><tr><td>2.5 bar ±10%</td><td>DV S 25 H P01</td></tr><tr><td>4.0 bar ±10%</td><td>DV S 40 H P01</td></tr></table>  Clear / Red clogging indicator A/F 17 Max tightening torque: 20 N·m 23	Settings	Ordering code	1.2 bar ±10%	DV S 12 H P01	2.5 bar ±10%	DV S 25 H P01	4.0 bar ±10%	DV S 40 H P01	Hydraulic symbol 	Materials - Body: Brass - Internal parts: Brass - Polyamide - Seal: HNBR Technical data - Reset: Automatic reset - Max working pressure: 35 bar - Proof pressure: 53 bar - Burst pressure: 105 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 - Degree protection: IP67 according to EN 60529				
Settings	Ordering code													
1.2 bar ±10%	DV S 12 H P01													
2.5 bar ±10%	DV S 25 H P01													
4.0 bar ±10%	DV S 40 H P01													