


## Dimensions

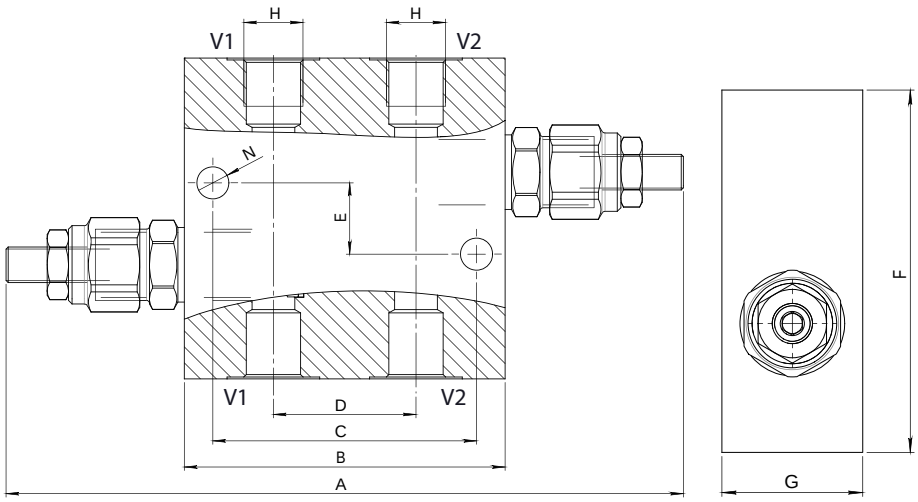

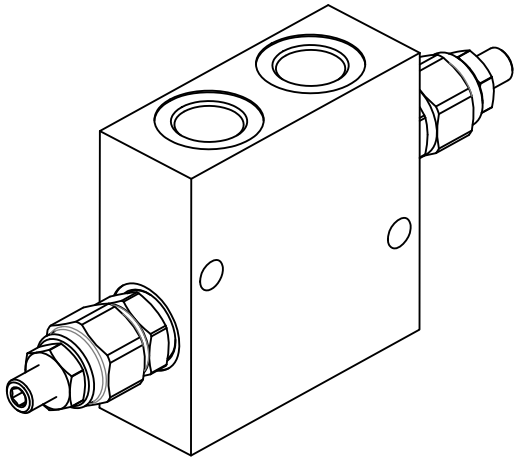



| Size | A | B | C | D | E | F | G | H BSP | N | Weight kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **02** | 190 | 90 | 74 | 40 | 20 | 90 | 35 | 3/8 | 9 | 0,95 |
| **03** | 190 | 90 | 74 | 40 | 20 | 90 | 35 | 1/2 | 9 | 0,93 |

## Hydraulic Symbol

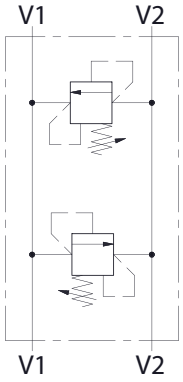


## Curves

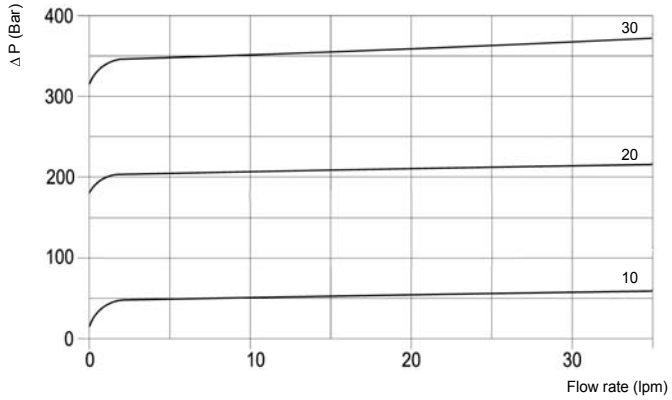


## Features

| | |
|---|---|
| **Rated Flow** | 35 lpm |
| **Max Pressure** | 350 bar |

**Materials:** Zinc plated steel cartridge, hardened steel inner parts. Aluminium manifold.

## Ordering Code

| DPRL 35 | - - | - - | - |
|---|---|---|---|

**Port Size BSP**

| | |
|---|---|
| **02** | 3/8 |
| **03** | 1/2 |

**Spring (bar)**

| | |
|---|---|
| **10** | 5-50 |
| **20** | 40-210 |
| **30** | 100-350 |

**Adjustments**

| | | |
|---|---|---|
| **A** |  | Socket Screw |
| **B** |  | Handknob |
| **C** |  | Tamperproof Cap |

**Ordering Code Example:** **DPRL350220A** = 3/8 Port Size - 40-210 bar setting range, Socket screw adjustment.