









Tensione ammissibile / Voltage duty rating	± 10%
Funzionamento / Working duty rating	ED 100%
Temperatura ambiente / Working env. Temp.	-30°C + 50 °C
Classe isolamento / Heat insulation class	CLASSE H (180°C)

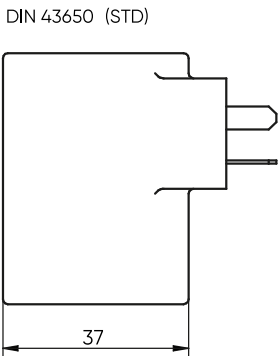

19-39

CL.	Tubo	Tens.	W/Va	A	B	Codice	Conn		Codice	Conn
H	13	12 Vdc	18	30	39	SH18133930D012D0	DIN 43650	STD	SH18133930D012G0	DEUTSCH
H	13	24 Vdc	18	30	39	SH18133930D024D0	DIN 43650	STD	SH18133930D024G0	DEUTSCH
H	13	110 Rac	19	30	39	SF19133930R11D0	DIN 43650	STD		
H	13	12 Vdc	18	30	39	SH18133930D012A0	AMPJ		SH18133930D012C0	LEADS
H	13	24 Vdc	18	30	39	SH18133930D024A0	AMPJ		SH18133930D024C0	LEADS
H	13	12 Vdc	22	36	39	SH20133936D012D0	DIN 43650	STD	SH20133936D012G0	DEUTSCH
H	13	24 Vdc	22	36	39	SH20133936D024D0	DIN 43650	STD	SH20133936D024G0	DEUTSCH
H	13	220 Rac	22	36	39	SH20133936D012D0	DIN 43650	STD		
H	13	12 Vdc	22	36	39	SH20133936D012A0	AMPJ		SH20133936D012C0	LEADS
H	13	24 Vdc	22	36	39	SH20133936D024A0	AMPJ		SH20133936D024C0	LEADS

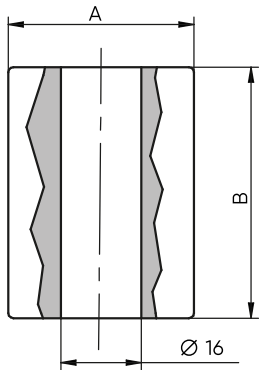

16-50

CL.	Tubo	Tens.	W/Va	A	B	Codice	Conn		Codice	Conn
H	16	12 Vdc	26	37	50	SH26165037D012D0	DIN 43650	STD	SH26165037D012G0	DEUTSCH
H	16	24 Vdc	26	37	50	SH26165037D024D0	DIN 43650	STD	SH26165037D024G0	DEUTSCH
H	16	12 Vdc	26	37	50	SH26165037D012A0	AMPJ		SH26165037D012C0	LEADS
H	16	24 Vdc	26	37	50	SH26165037D024A0	AMPJ		SH26165037D024C0	LEADS