Monoblocco Cetop 3 con utilizzi A-B lat 3/8" BSP . P-T post 1/2" BSP con valvola elettrica opzionale /
Monoblock Cetop 3 with A-B ports on side 3/8" BSP, P-T rear 1/2" BSP with optional venting valve

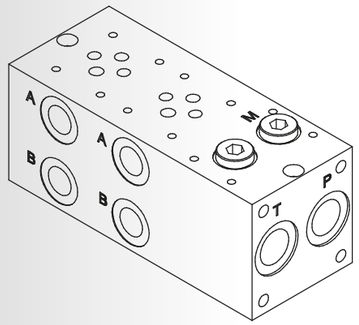

Schema idraulico /
Hydraulic scheme

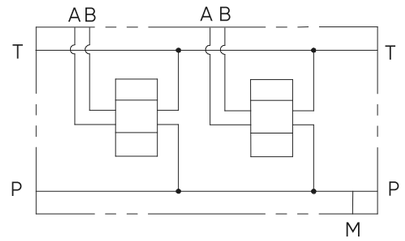

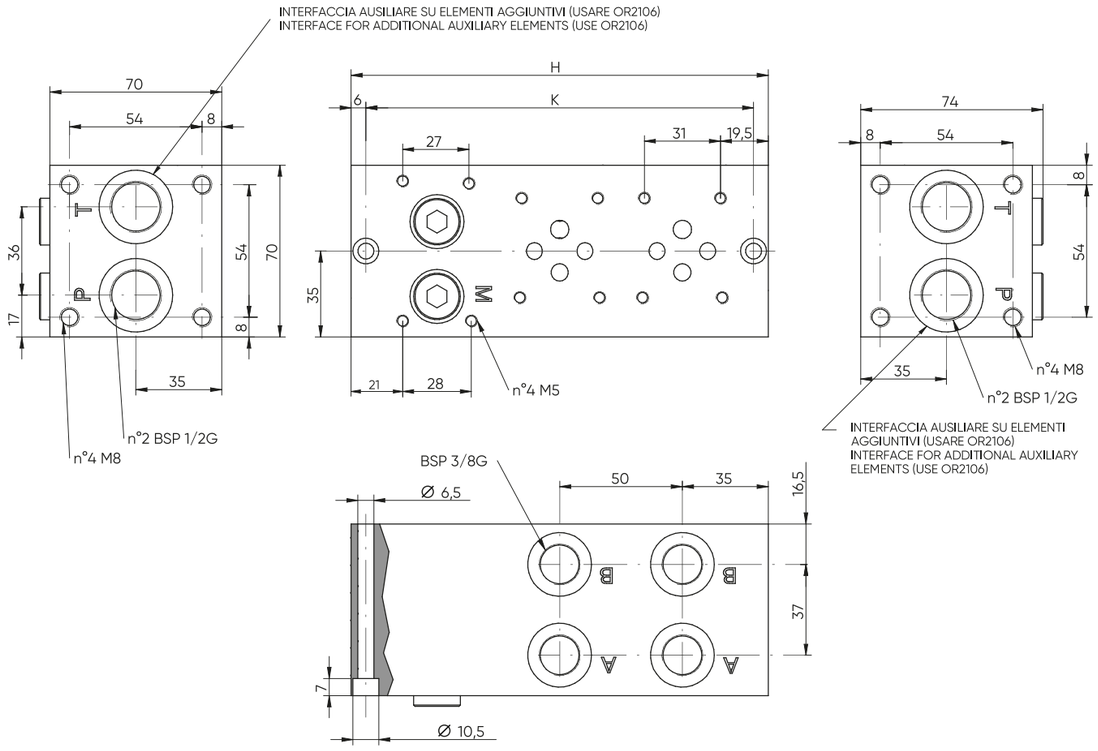

POS	01	02	03	04	05	06	07	08	09	10
H	120	170	220	270	320	370	420	470	520	570
K	108	158	208	258	308	358	408	458	508	558

E_ 06 - 21 - 38 - __ - 0

Accessori disponibili /**Available accessories:**

E_06-17-12	Elemento per venting o valvola di massima Venting or relief valve element (p. 14.1)
E_06-24-_	Elemento aggiuntivo venting Venting element (p. 14.2)

Vedi assiemi/**See assembly**

E_ 06 - 21 - 38 - __ - 1







E_ 06 - 21 - 38 - __ - 2







E_ 06 - 21 - 38 - __ - 4







ON REQUEST MOQ

E_ 06 - 21 - 38 - __ - 5







ON REQUEST MOQ

E_ 06 - 21 - 38 - __ - 6







ON REQUEST MOQ

E_ 06 - 21 - 38 - ___ - _ - _ - _ - _ - ___ - _ - _ - _ - ___ - _ - _

S = STEEL
A = ALUMINIUM

MOUNTING POSITIONS:01÷10

0 = WITHOUT RELIEF VALVE
1 = WITH RELIEF VALVE
2 = RELIEF VALVE READY
4 = WITH R.V. AND V.V. READY
5 = WITH R.V. AND V.V
6 = V.V. READY AND R.V. READY

0 = WITHOUT R.V.
1 = 5-55 bar
2 = 25-110 bar
3 = 50-215 bar
4 = 100-350 bar
5 = 100-420 bar

SEALS
N = BUNA

VENTING VALVE
000 = WITHOUT V.V.
TS2 = NORMALLY OPEN

CONNECTOR TYPE
0 = WITHOUT COIL
C = CAVI / LEADS
D = DIN 43650 (STD)
G = DEUTSCH DT04-2P
A = AMP JUNIOR

0 = WITHOUT RELIEF VALVE
H = HEX. HEAD SCREW (STD)

C = COVER CAP NOT ADJUSTABLE (STD)

K = KNOB (OR)

VENTING VALVE
0 = NO MANUAL OVERRIDE (STD)
3 = PUSH PIN
4 = PUSH BOTTON
5 = HEX. ALLEN (STD)

TENSIONE / VOLTAGE
000 = WITHOUT COIL
D12 = 12 VDC
D24 = 24 VDC
220 = 220 RAC

Montaggio con accessorri /
Assembly with accessories:

E_06-17-12 (p. 14.1)



E_06-24-_ (p. 14.2)



***see CARTRIDGE VALVES datasheets**

1.3