


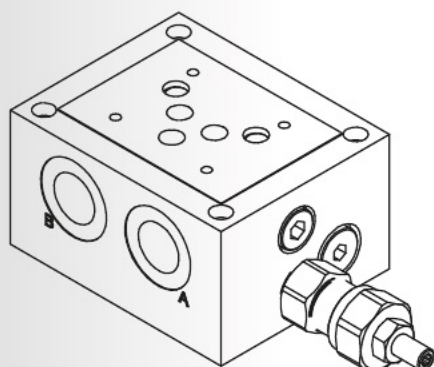
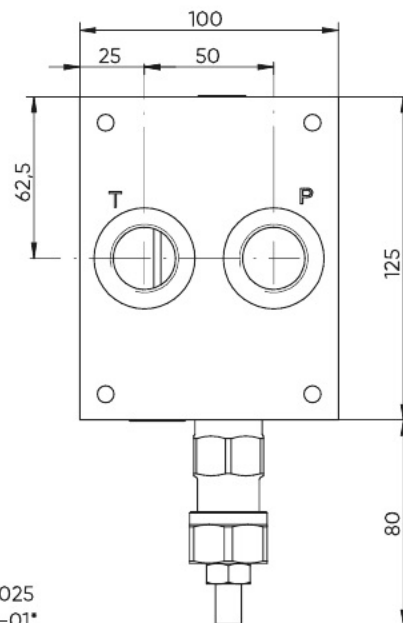


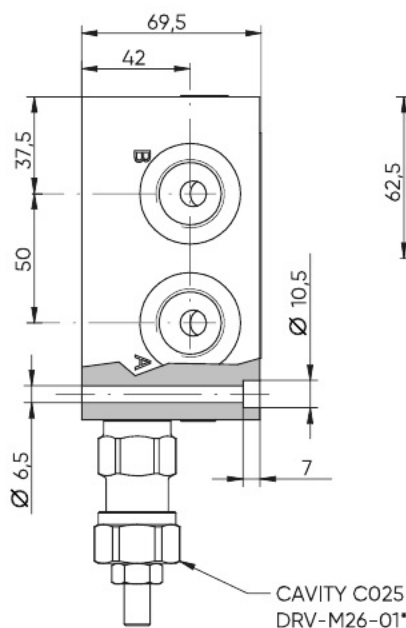

Schema idraulico /
Hydraulic scheme

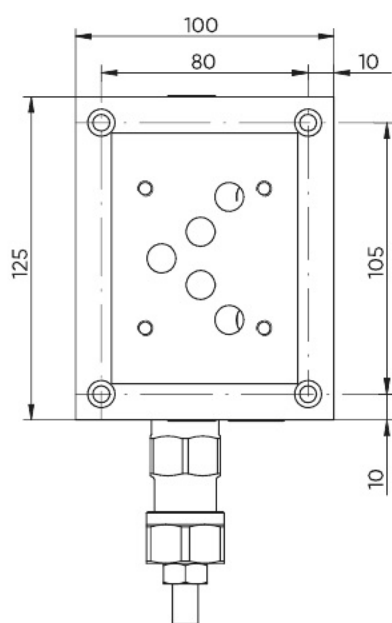

Tipi di regolazione / Regulation type

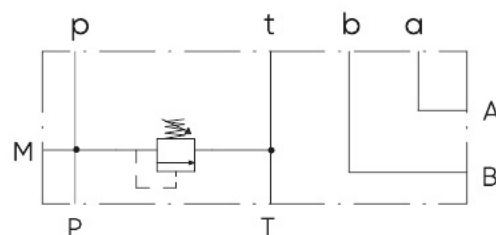


H Vite con chiave esagonale (STD)
Hexagonal head screw



C Cappuccio inviolabile (STD)
Cover cap not adjustable



K Pomolo
Knob

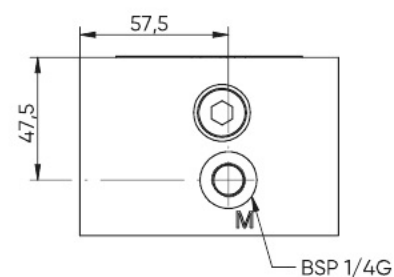

E_10 - 04 -

S = STEEL
A = ALUMINIUM

12 = BSP 1/2G
34 = BSP 3/4G

0 = WITHOUT RELIEF VALVE (PLUGGED CAVITY)
1 = WITH RELIEF VALVE
2 = RELIEF VALVE READY

0 = WITHOUT RELIEF VALVE
H = HEXAGONAL HEAD SCREW(STD)
C = COVER CAP NOT ADJUSTABLE(STD)
K = KNOB

0 = WITHOUT RELIEF VALVE
1 = 5-55 bar
2 = 25-110 bar
3 = 75-250 bar

*see CARTRIDGE VALVES datasheets