
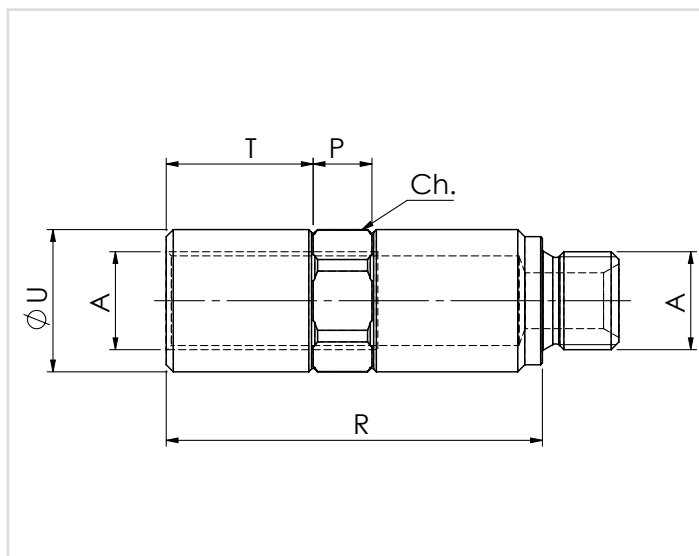


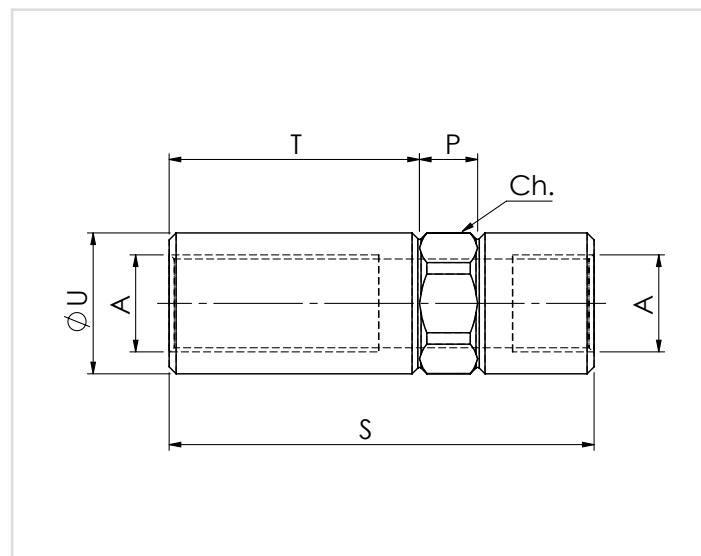

COLONNETTE - HOUSING M/F

TIPO TYPE	A	R	P	T	U	Ch.	PESO APPROX APPROX WEIGHT kg-lbt
61100057	BSPP 1/4	57 (2.24)	10 (0.39)	22 (0.87)	20.5 (0.81)	19	0.11 (0.16)
61100058	BSPP 3/8	64 (2.52)	10 (0.39)	25 (0.98)	24.5 (0.96)	22	0.14 (0.20)
61100059	BSPP 1/2	69 (2.71)	10 (0.39)	28 (1.10)	29.5 (1.16)	27	0.24 (0.30)
61100060	BSPP 3/4	87 (3.42)	12 (0.47)	36 (1.42)	35.5 (1.40)	32	0.34 (0.48)

COLONNETTE - HOUSING F/F

TIPO TYPE	A	S	P	T	U	Ch.	PESO APPROX APPROX WEIGHT kg-lbt
61100051	BSPP 1/4	66 (2.60)	10 (0.39)	38 (1.50)	20.5 (0.81)	19	0.11 (0.16)
61100052	BSPP 3/8	73 (2.87)	10 (0.39)	43 (1.69)	24.5 (0.96)	22	0.12 (0.20)
61100053	BSPP 1/2	81 (3.19)	10 (0.39)	50.5 (1.99)	29.5 (1.16)	27	0.20 (0.33)
61100054	BSPP 3/4	99 (3.90)	12 (0.47)	57 (2.24)	35.5 (1.40)	32	0.29 (0.50)

TARATURA SETTING mm	F _—	VRD140 Portata (l/min) - Flow rate (Usgpm)					
		A	B	C	D	E	F
10		1,4 (0,37)	2,4 (0,63)	3,8 (1,00)	6 (1,58)	8,6 (2,27)	12,2 (3,22)
9		1,9 (0,50)	3,1 (0,82)	4,7 (1,24)	7,6 (2,01)	10,3 (2,72)	15,4 (4,07)
8		2,1 (0,55)	3,8 (1,00)	5,6 (1,48)	8,9 (2,35)	12 (3,17)	18,6 (4,91)
7		3,3 (0,87)	5,9 (1,56)	7,2 (1,90)	10,6 (2,80)	13,1 (3,46)	18,8 (4,96)
6		4,2 (1,11)	7,8 (2,06)	9 (2,38)	13,4 (3,54)	17,5 (4,62)	24 (6,34)

TARATURA SETTING mm	F _—	VRD340 Portata (l/min) - Flow rate (Usgpm)				
		A	B	C	D	E
23		39,8 (10,51)	45,2 (11,93)	63,2 (16,68)	67 (17,69)	105 (27,72)
22		42,1 (11,11)	48 (12,67)	65,7 (17,34)	69,7 (18,40)	112,5 (29,70)
21		45,1 (11,91)	51,8 (13,68)	68 (17,95)	76,6 (20,22)	119 (31,42)
20		47 (12,41)	54,9 (14,49)	70,7 (18,66)	81,9 (21,62)	126,2 (33,32)
19		50,2 (13,25)	58,1 (15,34)	73,4 (19,38)	90,1 (23,79)	133,7 (35,30)
18		51,8 (13,68)	62,3 (16,45)	77,1 (20,35)	95 (25,08)	140,2 (37,01)
17		54,5 (14,39)	64,8 (17,11)	80,2 (21,17)	101 (26,66)	145,4 (38,39)
16		57,1 (15,07)	68,2 (18,00)	83,3 (21,99)	107 (28,25)	151 (39,86)

TARATURA SETTING mm	F _—	VRD380 Portata (l/min) - Flow rate (Usgpm)					
		A	B	C	D	E	F
15		1,7 (0,45)	3 (0,79)	5 (1,32)	10 (2,64)	16,5 (4,36)	19,5 (5,15)
14		2,3 (0,61)	3,8 (1,00)	6,2 (1,64)	13 (3,43)	20 (5,28)	23,4 (6,18)
13		2,6 (0,69)	4,7 (1,24)	8,2 (2,16)	15,6 (4,12)	22 (5,81)	26,9 (7,10)
12		3 (0,79)	5,2 (1,37)	9,4 (2,48)	16,6 (4,38)	23,5 (6,20)	29,8 (7,87)
11		3,7 (0,98)	5,5 (1,45)	10,5 (2,77)	18 (4,75)	25,4 (6,71)	33 (8,71)

TARATURA SETTING mm	F _—	VRD120 Portata (l/min) - Flow rate (Usgpm)				
		A	B	C	D	E
20		15,5 (4,09)	19,7 (5,20)	22,8 (6,02)	32 (8,45)	40,5 (10,69)
19		17 (4,49)	21,7 (5,73)	25,8 (6,81)	35,4 (9,35)	44,3 (11,70)
18		18 (4,75)	24,3 (6,42)	28 (7,39)	38,7 (10,22)	49,3 (13,02)
17		19,4 (5,12)	26,2 (6,92)	31,2 (8,24)	41,8 (11,04)	54,8 (14,47)
16		20,4 (5,39)	28,1 (7,42)	33,5 (8,84)	44 (11,62)	59,2 (15,63)
15		21,6 (5,70)	29,2 (7,71)	34,2 (9,03)	46,2 (12,20)	62,9 (16,61)
14		22,6 (5,97)	31 (8,18)	36,1 (9,53)	49,2 (12,99)	67,7 (17,87)
13		23,8 (6,28)	32,5 (8,58)	38,4 (10,14)	51,4 (13,57)	71,6 (18,90)

