


9 - OVERALL AND MOUNTING DIMENSIONS P2T-M* /33


DOUBLE MOUNTING FACILITY SUBPLATE WITH PRESSURE RELIEF VALVE INCORPORATED


HYDRAULIC SYMBOL

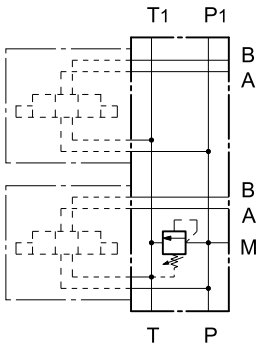


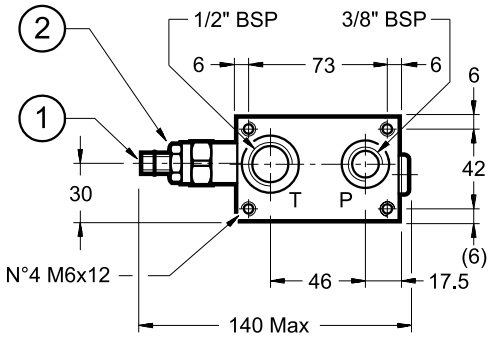

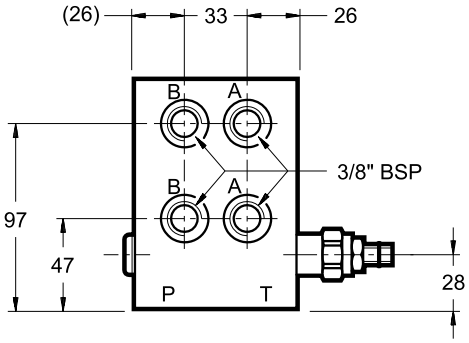

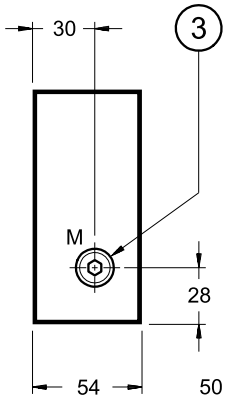

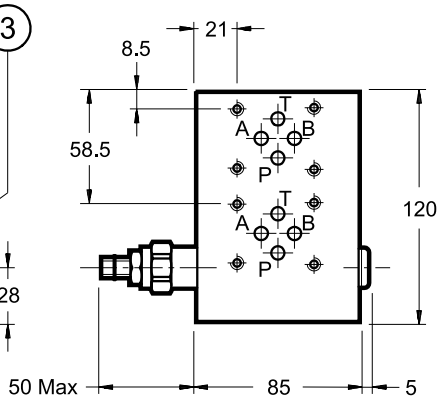

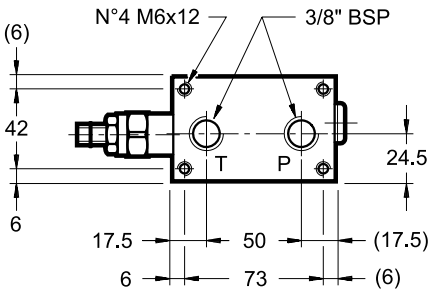

dimensions in mm

1	Countersunk hex adjustment screw: spanner 6 Clockwise rotation to increase pressure
2	Locking nut: spanner 19
3	Pressure gauge port 1/4” BSP plugged

Mass: kg 5