

Pressure gauge swivel adaptors - 400 bar rated
Adaptors FT 299 allow the connection of a pressure gauge direct to the system. They provide for correct dial orientation.
The adaptor has a built in 'O-ring' seal for use with pressure gauges with sealing nipple to DIN 16288.
The oil flow is restricted to the gauge dampen any pressure shock surges.
A gasket, supplied as current product and inserted in the rotating nut, impedes any blow-by between fitting and pressure gauge. In case the pressure-gauge is provided with a taper thread, it is necessary to use copper plug nuts FT 1201 on page 104 of this catalogue, to be requested separately.
Max. working pressure is 400 bar.

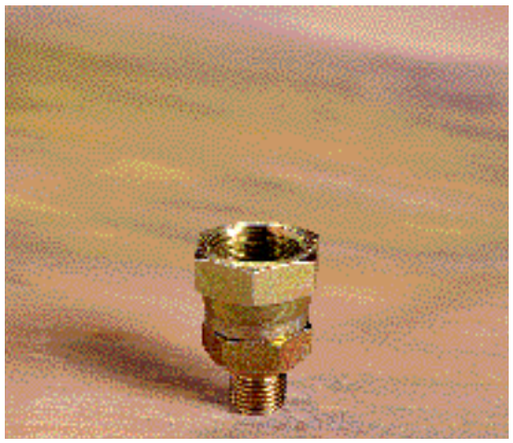

MATERIALS

Body	9 S Mn Pb 23 - UNI 5105
Nut	9 S Mn Pb 23 - UNI 5105
Or	Nitrile

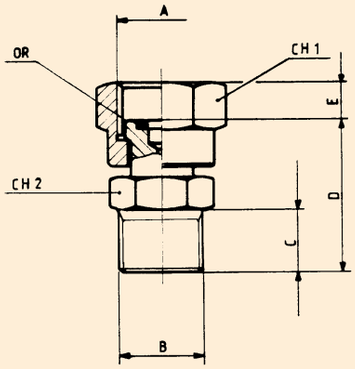

EXAMPLE FOR ORDERING

Code	Type
FT 299	44

CODE FT 299

Type	A UNI 338	B UNI 339	C	D	E	OR	CH1	CH2	Weight kg
88	1/8"G	1/8"Gc	9	22	7.5	2010	14	12	0.021
44	1/4"G	1/4"Gc	13	27	9.5	2018	18	17	0.040
42	1/4"G	1/4"Gc	16	31	9.5	2018	18	22	0.068
24	1/2"G	1/2"Gc	13	31	11	108	27	22	0.090
22	1/2"G	1/2"Gc	16	34	11	108	27	22	0.100

On request with cylindrical thread

HOME
INTRODUCTION
VALVES INDEX
LAST VIEW
PRINT