


**Gr.III Bombas engranaje/Tapa eur/eje conico 1:8
brida roscada**

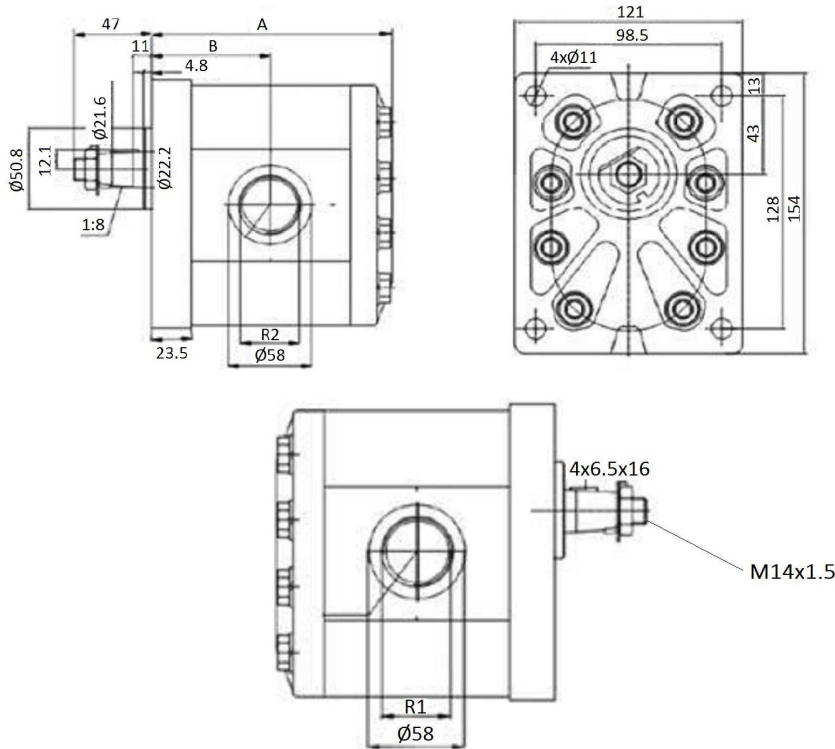

Referencia giro: BTD...I=Referencia giro izquierda
BTD...D=Referencia giro derecha
Min 400 rpm

Flange and cover: Hierro fundido

Artículo	R1	R2	Pres. max. (bar)	Pres. punta (bar)	R.P.M. Max	cm³/ rev	A	B
BTB3220D01	3/4" BSP	3/4" BSP	200	250	3000	22	130,5	63,5
BTB3260D01	3/4" BSP	3/4" BSP	200	250	3000	26	133,5	65
BTB3280D01	1" BSP	3/4" BSP	200	250	3000	28	134,5	65,5
BTB3320D01	1" BSP	3/4" BSP	200	250	3000	32	137,5	67
BTB3360D01	1" BSP	3/4" BSP	200	250	3000	36	140,5	68,5
BTB3420D01	1" BSP	3/4" BSP	200	250	2800	42	144,5	70,5
BTB3460D01	1" BSP	3/4" BSP	200	250	2400	46	147,5	72
BTB3500D01	1" BSP	3/4" BSP	200	250	2400	50	150	73,5
BTB3550D01	1" BSP	3/4" BSP	200	250	2400	55	153,5	75

R1 = aspiración; R2 = presión
DECIBELIOS: 85 dB
Par de apriete 45-50 Nm