



## NT1 NT2

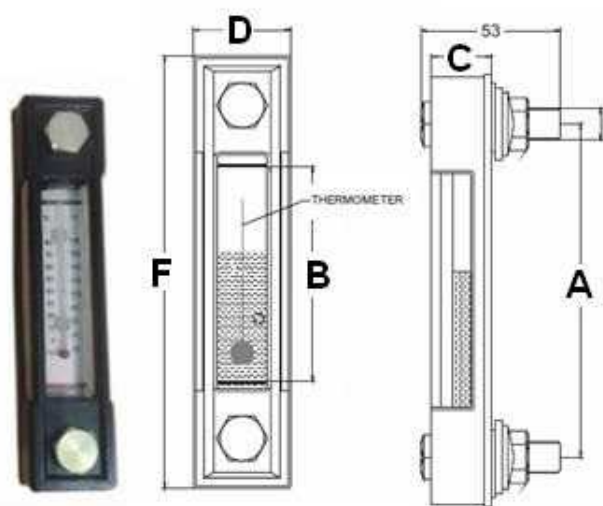

## NT3

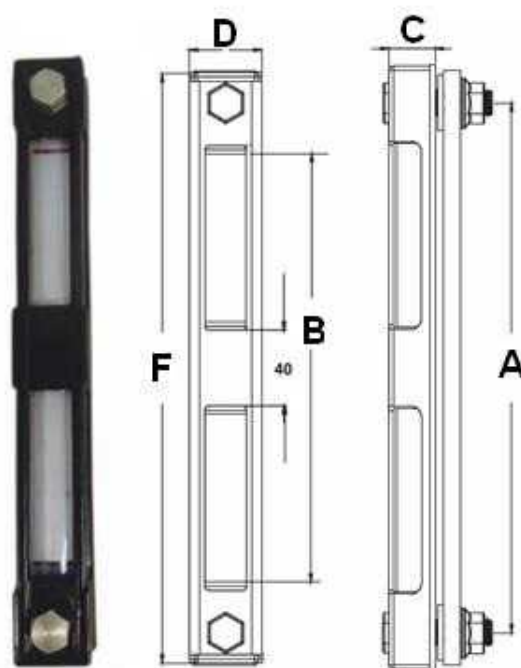

**Materials:** metallic body polycarbonate tube

**Max. temperature:** 80°C

| Part nº           | THREAD | SIZE | With thermometer                         | A    | B   | C  | D  | F   |
|-------------------|--------|------|------------------------------------------|------|-----|----|----|-----|
| <b>NT-1</b>       | M10    | 76   | Nivel / Level                            | 76,2 | 32  | 23 | 35 | 111 |
| <b>NT-1 M12</b>   | M12    | 76   | Nivel / Level                            | 76,2 | 32  | 23 | 35 | 111 |
| <b>NT-2</b>       | M12    | 127  | Nivel / Level                            | 127  | 76  | 23 | 35 | 162 |
| <b>NT-3</b>       | M12    | 254  | Nivel / Level                            | 254  | 200 | 23 | 35 | 289 |
| <b>NT-1-T</b>     | M10    | 76   | Nivel + Termómetro / Level + Thermometer | 76,2 | 32  | 23 | 35 | 111 |
| <b>NT-1-T M12</b> | M12    | 76   | Nivel + Termómetro / Level + Thermometer | 76,2 | 32  | 23 | 35 | 111 |
| <b>NT-2-T</b>     | M12    | 127  | Nivel + Termómetro / Level + Thermometer | 127  | 76  | 23 | 35 | 162 |
| <b>NT-3-T</b>     | M12    | 254  | Nivel + Termómetro / Level + Thermometer | 254  | 200 | 23 | 35 | 289 |

For non pressurised tanks only  
Bolt torque to be limited to 4.06Nm