


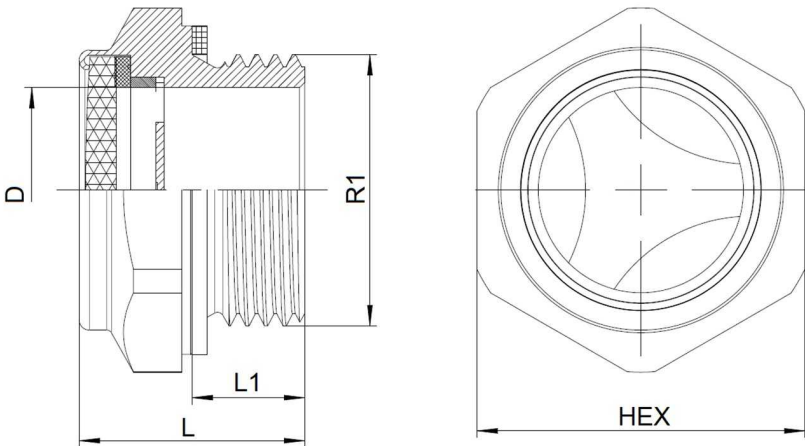

- Material

Body-aluminum 6061-t6 mill finished
Reflector aluminum mill finished red logo and dot in the middle
Window polycarbonateglass PC
- Gasket type

Sealing ring rubber NBR
- Threaded Gasket

Aramid fiber gasket
Aluminum gasket
- Maximum continuous working temperature

-40C° to100C°
- Working pressure

The working pressure should be lower than 8bar
The instantaneous pressure should be lower than 15bar

Part n°	R1	L	L1	HEX 1	ØD
NTL1G	1/4" BSP	14	8	17	9
NTL2G	3/8" 'BSP	15	9	22	12
NTL3G	1/2" BSP	19	10	27	16
NTL4G	3/4" BSP	20	11	32	20
NTL5G	1" BSP	24	14	40	36
NTL6G	1"1/4 BSP	25	15	50	36
NTL7G	1"1/2 BSP	25	15	55	40
NTL8G	2" BSP	27	16	70	49