

Pressure switch

Adjustable monocontact pressure switch - normally closed





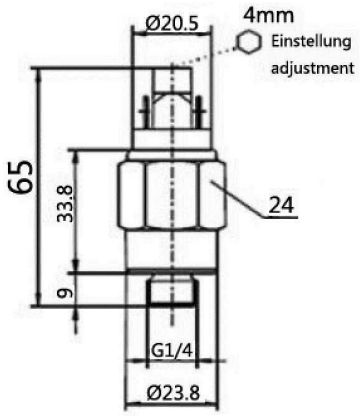

Part nº	R1	MAX. PRESSURE (bar)	P(IP)	Reg. rate (bar)	Execution
PTNC300550	1/4" BSP	300	IP54	5 - 50 bar	Piston
PTNC30010100	1/4" BSP	300	IP54	10 - 100 bar	Piston
PTNC30020200	1/4" BSP	300	IP54	20 - 200 bar	Piston

-20ºC +90ºC
304 stainless steel
The hysteresis cycle is 15–25% of the set value.

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.