
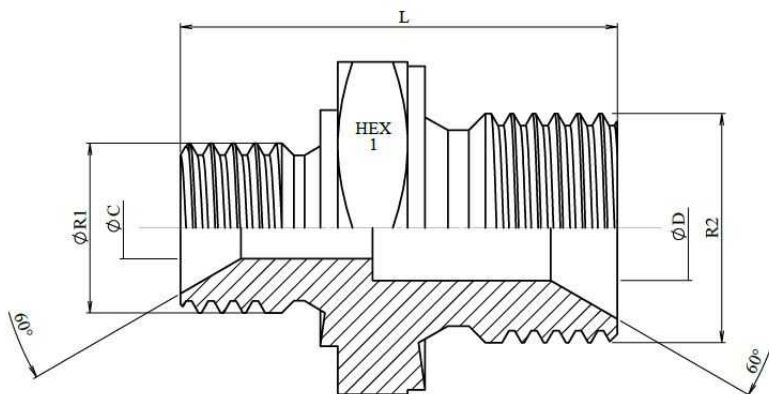


**Reducer adaptor BSP male-BSP male (60°)**

Carbon steel

**1/1**

| Part nº          | R1         | R2         | L    | HEX 1 | ØC   | ØD   |
|------------------|------------|------------|------|-------|------|------|
| <b>A10200204</b> | 1/8" BSP   | 1/4" BSP   | 25   | 17    | 3,5  | 6    |
| <b>A10200206</b> | 1/8" BSP   | 3/8" BSP   | 26   | 22    | 3,5  | 8    |
| <b>A10200406</b> | 1/4" BSP   | 3/8" BSP   | 32   | 22    | 6    | 8    |
| <b>A10200408</b> | 1/4" BSP   | 1/2" BSP   | 34   | 27    | 6    | 11   |
| <b>A10200608</b> | 3/8" BSP   | 1/2" BSP   | 38   | 27    | 8    | 11   |
| <b>A10200612</b> | 3/8" BSP   | 3/4" BSP   | 40   | 32    | 8    | 16   |
| <b>A10200812</b> | 1/2" BSP   | 3/4" BSP   | 43,5 | 32    | 11   | 16   |
| <b>A10200816</b> | 1/2" BSP   | 1" BSP     | 46,5 | 41    | 11   | 22   |
| <b>A10201008</b> | 5/8" BSP   | 1/2" BSP   | 44   | 30    | 14   | 11   |
| <b>A10201012</b> | 5/8" BSP   | 3/4" BSP   | 45   | 32    | 14   | 16   |
| <b>A10201216</b> | 3/4" BSP   | 1" BSP     | 48   | 41    | 16   | 22   |
| <b>A10201220</b> | 3/4" BSP   | 1"1/4 BSP  | 51   | 50    | 16   | 28,5 |
| <b>A10201620</b> | 1" BSP     | 1"1/4 BSP  | 56   | 50    | 22   | 28,5 |
| <b>A10201624</b> | 1" BSP     | 1"1/2 BSP  | 58   | 55    | 22   | 33   |
| <b>A10202024</b> | 1"1/4 BSP  | 1"1/2 BSP  | 62   | 55    | 28,5 | 33   |
| <b>A10202032</b> | 1"1/4 BSP  | 2" BSP     | 64   | 70    | 28,5 | 46   |
| <b>A10202432</b> | 1"1/2 BSP  | 2" BSP     | 66   | 70    | 33   | 46   |
| <b>A10203240</b> | 2" BSP     | 2" 1/2 BSP | 72   | 85    | 46   | 55   |
| <b>A10203248</b> | 2" BSP     | 3" BSP     | 85   | 100   | 46   | 64   |
| <b>A10204048</b> | 2" 1/2 BSP | 3" BSP     | 85   | 100   | 55   | 64   |