

MFCC SERİSİ NG10 MODÜLER ÇEKİLİ HIZ AYAR VALFİ

NG10 Modüler çekil hız ayar valfleri akışkanın hızının bir yönde ayarlanmasını diğer yönde de çekvalfi açarak rahatça geçişini sağlayan valflerdir. NG10 Modüler Hız Ayar Valfleri pleyt üzerine bağlantı ile diğer valflerle uyumlu çalışmaktadır. Montaj yüzeyi NG10'dur. NG10 Modüler çekil hız ayar valfleri mobil ve diğer sanayi alanlarında geniş kapsamda kullanılmaktadır.

Malzeme	Alüminyum
Bağlantı Şekli	NG10 Bağlantılı
Sızdırmazlık	Nitril O-ring (NBR)
Çalışma Sıcaklığı	-30 °C ile +110 °C
Kullanım Alanı	Genel hidrolik uygulamaları



MFCC SERIES NG10 MODULAR FLOW CONTROL VALVES (WITH CHECK)

NG10 Modular Flow Control Valves (with check) are valves that allow the fluid speed to be adjusted in one direction and pass comfortably by opening the check valve in the other direction. NG10 Modular Flow Control Valves are compatible with other valves by connecting to the subplates. Mounting surface is NG10. NG10 Modular Flow Control Valves (with check) are widely used in mobile and other industrial areas.

Material	Aluminium
Connection Type	NG10 Connection
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +110 °C
Applications	General Hydraulic Applications




206



FER-RO / MFCC SERİSİ NG10 MODÜLER ÇEKİLİ HIZ AYAR VALFİ

FER-RO / MFCC SERIES NG10 MODULAR FLOW CONTROL VALVES (WITH CHECK)

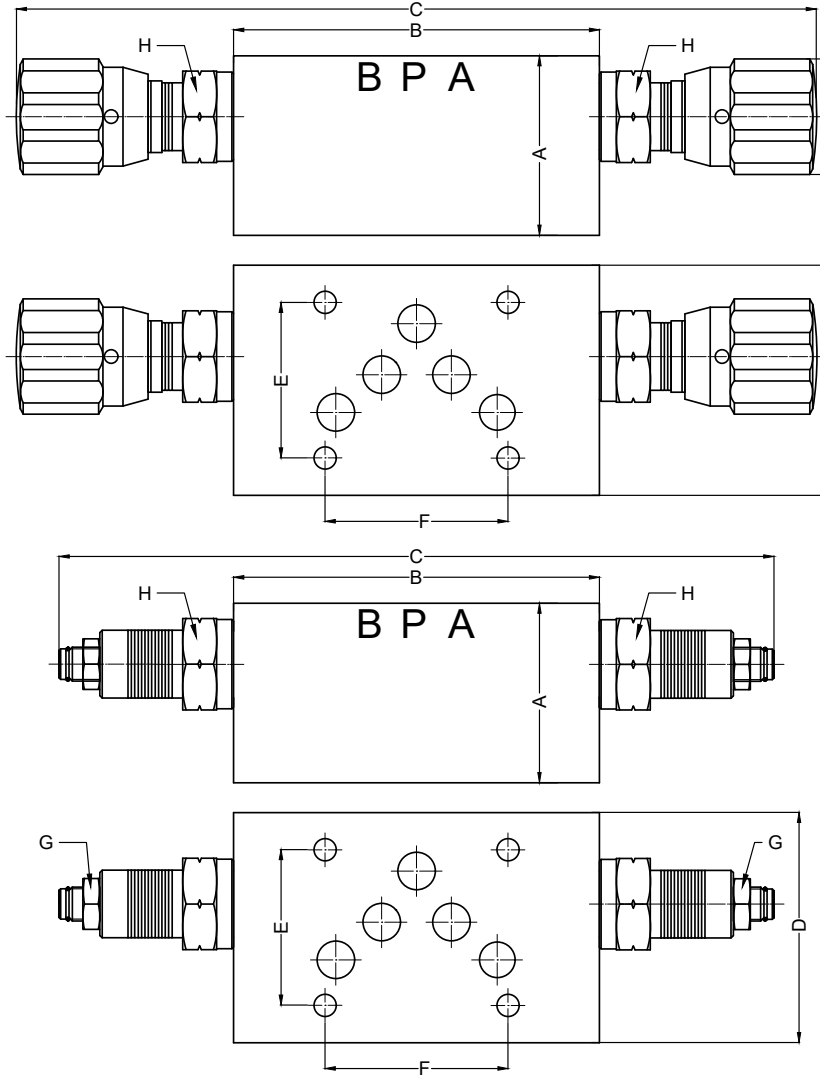

Teknik Özellikler Technical Specifications

Kod (Code)	Bağlantı Ölçüsü (Connection Type)	Çalışma Basıncı (Working Pressure) Bar	Max. Yağ Akışı (Max. Flow) Lt/Min	Ölçüler - mm (Dimensions - mm)							
				A	B	C	D	E	F	G	H
MFCCKNNG10N	NG10	350	80	53	108	239	68	46	54	Ø34	AA27
MFCCSHNG10N	NG10	350	80	53	108	225	68	46	54	AA15	AA27

